

VOLO- MODEL: OP1NS


WAC ARCHITECTURAL

Linear Luminaires


Project Name:

Type:

Product Image

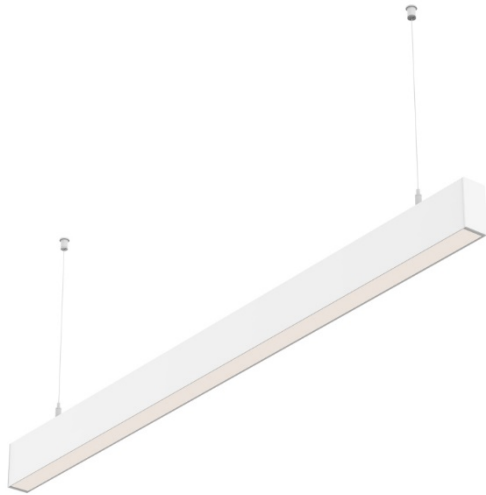

Line Drawing

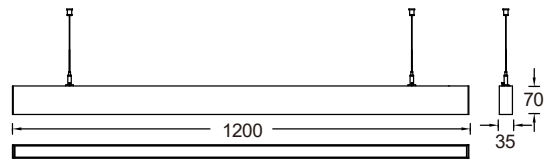

Product Description

VOLO Pendant Linear Light, with aluminum body, compact and aesthetic appearance. LED light source, with good heat dissipation. Energy efficient, good anti-glare, customized lengths and connectable at the beginning and end. Suitable for commercial office lighting applications.

Product Features

- **Body Materials:** Aluminum Alloy Body
- **Optical System:** Anti-glare Panel
- **Finishes:** Electrostatic Powder Coating
- **Objection Direction:** /
- **Accessory/Bracket:** /
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C~40°C

Product Specifications

- **Shading Angle:** /
- **LED Type:** SMD LED
- **Source Lm:** /
- **LED Lifetime:** > 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K/ 3500K/4000K/5000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V-240V AC / 50Hz
- **Dimming:** ON-OFF/0-10V/DALI (Matching tests must be done with the project site systems)
- **Net Weight:** Approx. 1.5Kg, excluding packaging

Order Model

Model	Comment	Length(mm)	Power (W)	Driver	Beam	CCT	Finish
OP1N	S Single Directional	12 1200	25 25W	E ON-OFF D 0-10V Dimming A DALI	P (Matte Cover)	30 3000K	WT White
					Y (Prism Cover)	35 3500K	BK Black
						40 4000K	
						50 5000K	

Exmaple: OP1NS-1225E-P30WT

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP
TECHNOLOGY ILLUMINATED

VOLO- MODEL: OP1ND


Linear Luminaires

WAC ARCHITECTURAL


Project Name:

Type:

Product Image

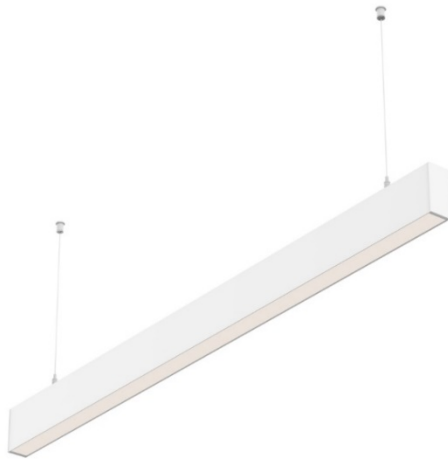

Line Drawing

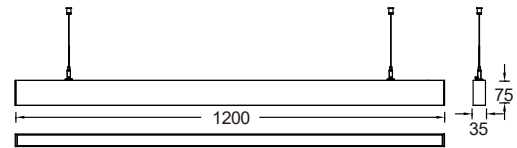

Product Description

VOLO Pendant Linear Light, with aluminum body, compact and aesthetic appearance. LED light source, with good heat dissipation. Energy efficient, good anti-glare, customized lengths and connectable at the beginning and end. Suitable for commercial office lighting applications.

Product Features

- **Body Materials:** Aluminum Alloy Body
- **Optical System:** Anti-glare Panel
- **Finishes:** Electrostatic Powder Coating
- **Objection Direction:** /
- **Accessory/Bracket:** /
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C~40°C

Product Specification

- **Shading Angle:** /
- **LED Type:** SMD LED
- **Source Lm:** /
- **LED Lifetime:** > 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K/ 3500K/4000K/5000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V-240V AC / 50Hz
- **Dimming:** ON-OFF/0-10V/DALI (Matching tests must be done with the project site systems)
- **Net Weight:** Approx. 1.5Kg, excluding packaging

Order Model

Model	Comment	Length(mm)	Power	Driver	Beam Up	Beam Down	CCT	Finish
OP1N	D Double Directional	12 1200	35 25W downward +10W upward	E ON-OFF D 0-10V Dimming A DALI	F Frosted	P Matte Cover	30 3000K	WT White BK Black
						Y Prism Cover	35 3500K	
							40 4000K	
							50 5000K	

Example: OP1ND-1235E-FY40WT

WAC Lighting
www.wacighting.com (US)
www.wacighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP
TECHNOLOGY ILLUMINATED

WAC Lighting reserves the right to periodically design and update products. 2025-08-12