

# VOLO - MODEL: OR1S

## Linear Luminaires



WAC ARCHITECTURAL

Project Name:

Type:

Product Image

Line Drawing

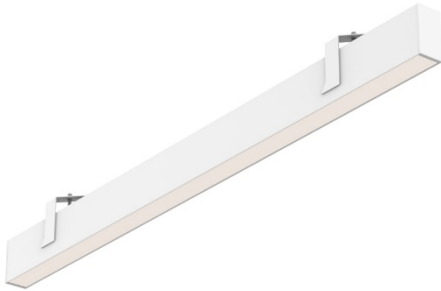

### Product Description

VOLO Pendant Linear Light, with aluminum body, compact and aesthetic appearance. LED light source, with good heat dissipation. Energy efficient, good anti-glare, customized lengths and connectable at the beginning and end. Suitable for commercial office lighting applications.

### Product Features

- **Body Materials:** Aluminum Alloy Body
- **Optical System:** Anti-glare Panel
- **Finishes:** Electrostatic Powder Coating
- **Objection Direction:** /
- **Accessory/Bracket:** /
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C~40°C

### Product Specifications

- **Shading Angle:** /
- **LED Type:** SMD LED
- **Source Lm:** /
- **LED Lifetime:** > 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K/ 3500K/4000K/5000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V-240V AC / 50Hz
- **Dimming:** ON-OFF/0-10V/DALI (Matching tests must be done with the project site systems)
- **Net Weight:** Approx. 1.8Kg, excluding packaging

### Order Model

Model	Length (mm)	Power (mm)	Driver	Beam	CCT	Finish
OR1S	12 1200	30 30W	E ON-OFF D 0-10V Dimming A DALI	P (Matte Cover)	30 3000K	WT White
				Y (Prism Cover)	35 3500K	BK Black
					40 4000K	
					50 5000K	

Example: OR1S-1230E-Y40WT

WAC Lighting  
www.waclighting.com (US)  
www.waclighting.net (International)

Headquarters  
44 Harbor Park Drive • Port Washington, NY  
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP  
TECHNOLOGY ILLUMINATED

WAC Lighting reserves the right to periodically design and update products. 2025-08-12

# VOLO - MODEL: OR1S

## Linear Luminaires


WAC ARCHITECTURAL

Project Name:

Type:

Product Image

Line Drawing



### Product Description

VOLO Pendant Linear Light, with aluminum body, compact and aesthetic appearance. LED light source, with good heat dissipation. Energy efficient, good anti-glare, customized lengths and connectable at the beginning and end. Suitable for commercial office lighting applications.

### Product Features

- **Body Materials:** Aluminum Alloy Body
- **Optical System:** Lens + SUBROSA Invisible Optical System
- **Finishes:** Electrostatic Powder Coating
- **Objection Direction:** /
- **Accessory/Bracket:** /
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C~40°C

### Product Specifications

- **Shading Angle:** /
- **LED Type:** SMD LED
- **Source Lm:** /
- **LED Lifetime:** > 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K/ 3500K/4000K/5000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V-240V AC / 50Hz
- **Dimming:** ON-OFF/0-10V/DALI (Matching tests must be done with the project site systems)
- **Net Weight:** Approx. 2.0Kg, excluding packaging

### Order Model

Model	Length (mm)	Power (mm)	Driver	Beam	CCT	Finish
OR1S	12 1265	30 30W	E ON-OFF	2 24°	30 3000K	WT White
			D 0-10V Dimming	3 36°	35 3500K	BK Black
			A DALI	4 45°	40 4000K	
				50 5000K		

Example: OR1S-1230E-240WT

WAC Lighting  
www.waclighting.com (US)  
www.waclighting.net (International)

Headquarters  
44 Harbor Park Drive • Port Washington, NY  
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP  
TECHNOLOGY ILLUMINATED

WAC Lighting reserves the right to periodically design and update products. 2025-08-12