

Installation Declaration:

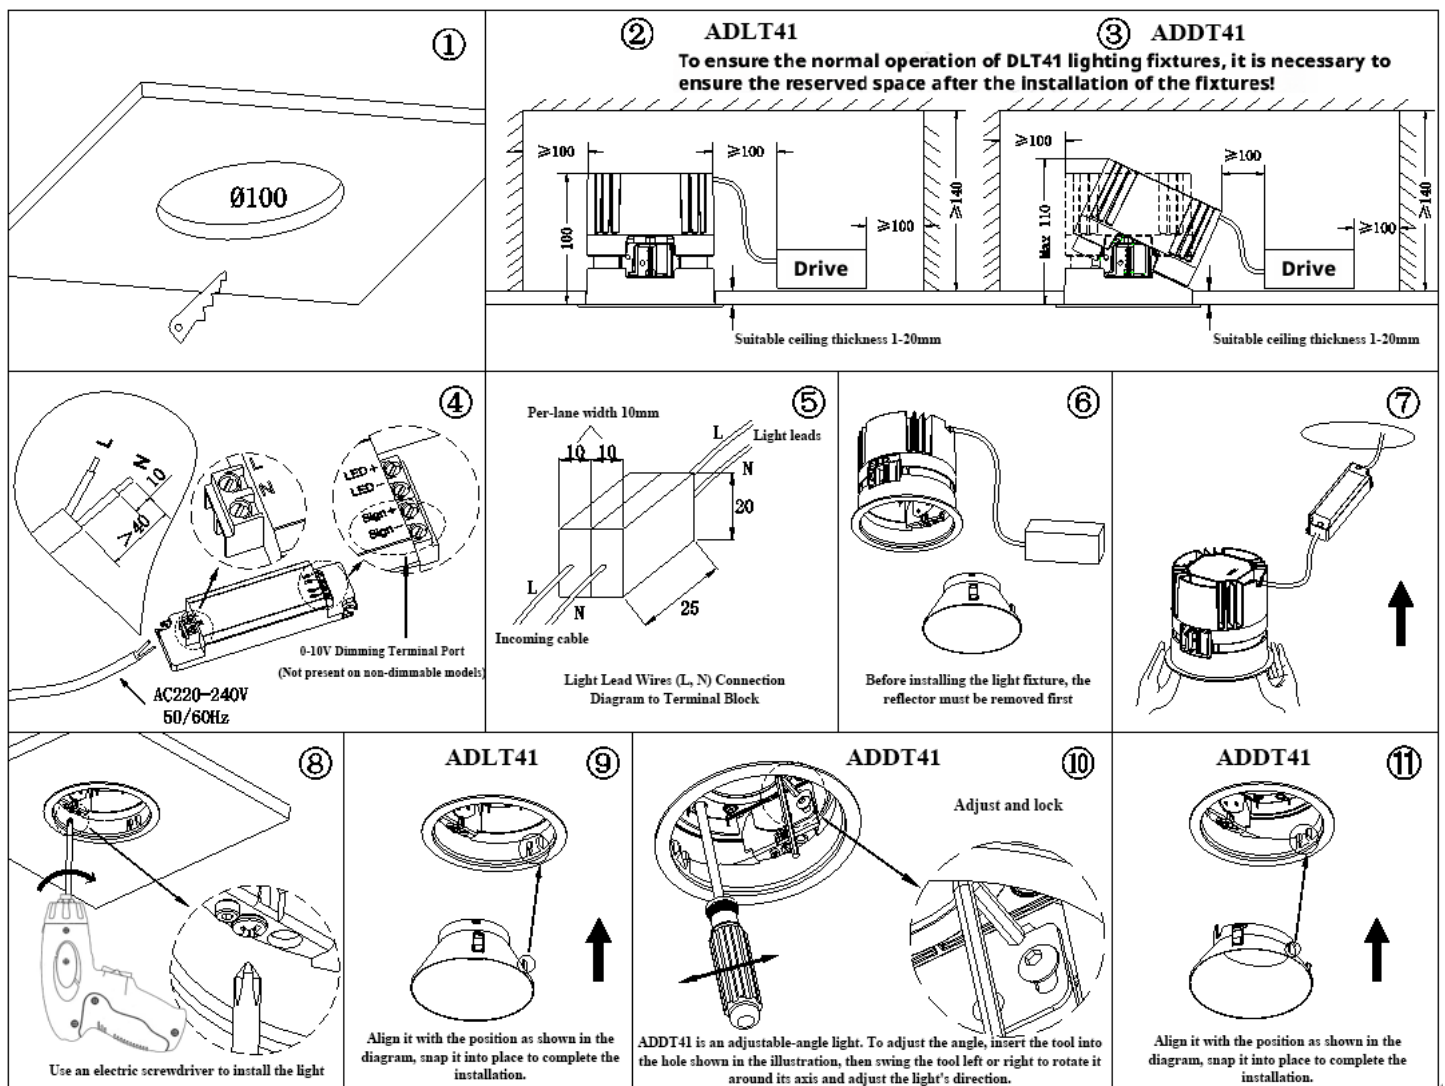
1. Please read the manual carefully before installation;
2. Please have a professional electrician perform the installation;
3. To avoid the risk of electric shock, please ensure the power is turned off before installation and maintenance;
4. The fixture can be recessed into the ceiling surface, and sufficient installation space must be reserved. Do not cover the fixture with insulation materials or flammable substances to avoid fire hazards;
5. If the glass is cracked, please replace it immediately;
6. Do not install the fixture on an unstable or weak skylight to prevent it from falling;
7. Keep the manual for future reference;
8. The light source inside this fixture should be replaced by the manufacturer, its service agent, or a person with similar qualifications.

Wiring for fixture installation:

① 1. Before installing the fixture, please create a template according to the installation instructions for a trial fit. Set the electric screwdriver to the appropriate torque setting to prevent damage to the fixture's mounting feet from excessive tightening. 2. After installation, ensure sufficient clearance is maintained to guarantee proper operation of the fixture.	
② Ceiling opening size : Ø75mm	③ Per-lane width 10mm Light leads Incoming cable Light Lead Wires (L, N) Connection Diagram to Terminal Block
④ Before installation, pull the plastic bag to remove the reflector, or first unscrew the support legs counterclockwise, then insert a screwdriver (or other tool) into the hole and gently pry out the reflector.	
⑤ After completing the driver wiring, insert the driver and fixture together into the ceiling cavity and press them firmly into place. Note: Support the fixture with your hand after insertion but before final installation to prevent it from falling.	
⑥ Use an electric screwdriver for installation (clockwise for installation, counterclockwise for removal).	⑦ ADDT31 Angle Adjustment (ADLT31 do not require this step): For ADDT31, insert a screwdriver into the angle adjustment hole and wiggle it left and right to adjust the angle. After completing the adjustment, use a 3mm hex wrench to tighten the locking screw clockwise.
⑧ ADDT31 ADLT31 When installing the reflector, align the anti mistake reinforcement strip on the reflector with the limit groove of the surface frame and push it in to complete the installation of the light.	

Installation Declaration:

1. Please read the manual carefully before installation;
2. Please have a professional electrician perform the installation;
3. To avoid the risk of electric shock, please ensure the power is turned off before installation and maintenance;
4. The fixture can be recessed into the ceiling surface, and sufficient installation space must be reserved. Do not cover the fixture with insulation materials or flammable substances to avoid fire hazards;
5. If the glass is cracked, please replace it immediately;
6. Do not install the fixture on an unstable or weak skylight to prevent it from falling;
7. Keep the manual for future reference;
8. The light source within this fixture should be replaced by the manufacturer, its service agent, or a person with similar qualifications.

Wiring for fixture installation:

- * If the lamp's electrical appliance comes with a built-in lead, and this connecting lead needs to be connected to an independent terminal block (refer to Figure 5 for the wiring diagram), each terminal block size should not be less than 10x20x25mm.
- * For lamps without electrical appliances, if the lamp has brown and blue leads, it cannot be directly connected to 220V AC. The customer must provide their own electrical appliance, which needs to be compatible with the light source.