

VOLO- MODEL: OR1L


Linear Luminaires

WAC ARCHITECTURAL


Project Name:

Type:

Product Image

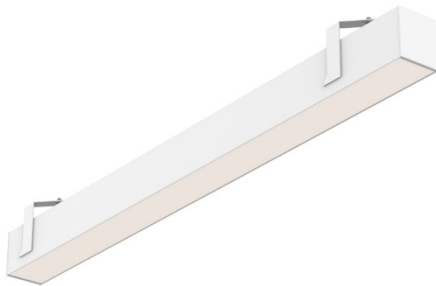

Line Drawing

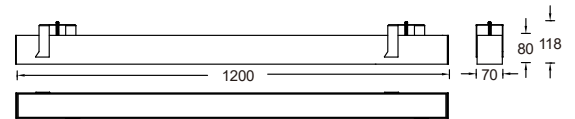

Product Description

VOLO Pendant Linear Light, with aluminum body, compact and aesthetic appearance. LED light source, with good heat dissipation. Energy efficient, good anti-glare, customized lengths and connectable at the beginning and end. Suitable for commercial office lighting applications.

Product Features

- **Body Materials:** Aluminum Extruded Lamp Body
- **Optical System:** Anti-glare Panel
- **Finishes:** Electrostatic Powder Coating
- **Objection Direction:** /
- **Accessory/Bracket:** /
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I

Product Specifications

- **Shading Angle:** /
- **LED Type:** SMD LED
- **Source Lm:** /
- **LED Lifetime:** > 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K/ 3500K/4000K/5000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V-240V AC / 50Hz
- **Dimming:** ON-OFF/0-10V/DALI (Matching tests must be done with the project site systems)
- **Net Weight:** Approx. 2.7Kg, excluding packaging

Order Model

| Model | Length (mm) | Power (mm) | Driver | Beam | CCT | Finish |
|-------|-------------|------------|-----------------|---------------|----------|----------|
| OR1L | 12 1200 | 40 40W | E On-Off | P Matte Cover | 30 3000K | WT White |
| | | | D 0-10V Dimming | Y Prism Cover | 35 3500K | BK Black |
| | | | A DALI | | 40 4000K | |
| | | | | | 50 5000K | |

Example: OR1L-1240E-P30WT

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP
TECHNOLOGY ILLUMINATED