

# ACCENT C7 -MODEL: AELC7

WAC ARCHITECTURAL

Linear Luminaires


PROJECT :

TYPE :

## Product Image



## Line Drawing

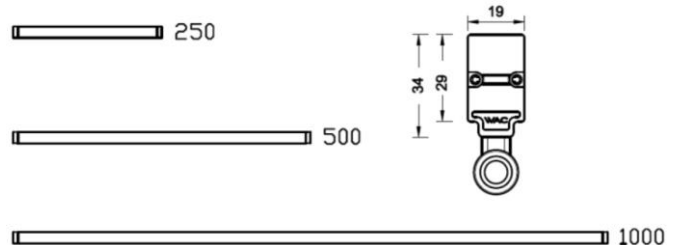

## Product Description

The BEACON X3 series lighting fixtures use equally spaced light sources with strong light efficiency and long lifespan, ensuring uniform light output and no graininess. Linear lighting fixtures meet the requirements of LEED outdoor lighting power consumption design. The slender lamp body and clean appearance ensure easy assembly to the exterior wall. BEACON lighting fixtures come from the bottom of the lighting equipment and are flexible to meet the power cable requirements of the project. IP66 waterproof rating. DC24V ensures effective transmission of power and signals, with low line losses. DMX512 dimming control with automatic addressing function. The bracket is easy to install and disassemble, simplifying maintenance difficulty. At the same time, the vertical direction is subjected to the clamping force of the bracket, which effectively ensures that the lamp is not prone to falling in the vertical direction. Unique fixed bracket design, integrated with safety rope, improves the safety factor of use.

## Product Features

- Body Material: PC94V0
- Optical System: Integrated extrusion lens
- Finish: /
- Adjustable Angle: /
- Accessories: Fixed bracket/Rotating bracket
- Certification: CQC
- IP Rating: IP66
- Insulation Level: Class III
- Operating Temperature: -20°C~50°C

## Product Specifications

- LED Type: SMD
- LED Power: 12W Max / 1000mm
- Source Lm: 3000K 1320LM
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K / 3000K / 4000K / Ra80
- SDCM: 3 SDCM
- Input: 24V/DC
- Dimming: ON-OFF / DMX512
- Net Weight: 0.95Kg without packing

# ACCENT C7 -MODEL: AELC7

WAC ARCHITECTURAL

Linear Luminaires

PROJECT :

TYPE :

## Order Model

Model	Length (mm)	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	Phase Controller	CCT	Finish
<b>AELC703</b>	250	<b>03</b> 3(Max)	24	177	<b>ET</b> ON-OFF 24V/DC Power Supply	<b>P</b> Three sided luminescence	<b>0</b> W/O Phase	<b>27</b> 2700K	<b>BK</b> Black
<b>AELC705</b>	500	<b>06</b> 6(Max)	48	354				<b>30</b> 3000K	
<b>AELC710</b>	1000	<b>12</b> 12(Max)	96	709				<b>40</b> 4000K	

Example: AELC710-12ETP030BK

Model	Length (mm)	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	Phase Controller	CCT	Finish
<b>AELC703</b>	250	<b>03</b> 3(Max)	24	177	<b>MT</b> DMX512 Dimming 24V/DC Power Supply	<b>P</b> Three sided luminescence	<b>1</b> 1Phase <b>2</b> 2Phase	<b>27</b> 2700K	<b>BK</b> Black
<b>AELC705</b>	500	<b>06</b> 6(Max)	48	354				<b>30</b> 3000K	
<b>AELC710</b>	1000	<b>12</b> 12(Max)	96	709				<b>40</b> 4000K	

Example: AELC710-12MTP130BK

# ACCENT C7 -MODEL: AELC7













WAC ARCHITECTURAL

Linear Luminaires


PROJECT :

TYPE :

## Accessories

Item	Description	Pic	Description Dimensions	Quantity Suggested
<b>AELC7-FB001</b>	Fix Bracket			n + 1 (n=Luminare QTY.)
<b>AELC7-AB001</b>	Adjust Bracket			2n (n=Luminare QTY.)
<b>AELF5-PC-CT002F</b>	ET Female connector			1 pc per 14m
<b>AELF5-PC-CT002M</b>	ET Male connector			1 pc per 14m
<b>AELF5-CC-CT002F</b>	MT Female connector			1 pc per 14m
<b>AELF5-CC-CT002M</b>	MT Male connector			1 pc per 14m

## LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



<b>MODEL :</b>	AELC710-12ETP030BK
<b>BEAM ANGLE :</b>	136°
<b>POWER :</b>	12.5 W
<b>LUMENS :</b>	709.4 lm
<b>CBCP :</b>	/
<b>EFFICACY :</b>	56.8 lm /W