

# SLANA LINEAR - MODEL: AES301G


WAC ARCHITECTURAL

Surface mounting Luminaires



PROJECT:

TYPE:

## Product Image

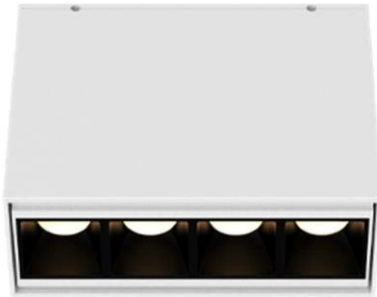

## Line Drawing



## Product Description

Surface mounted linear down lighting fixtures, using SUBROSA hidden light technology, are more decorative in building lighting, with multiple light distribution and AC220V input. Exquisite and meticulous appearance and structural design, as well as excellent optical performance, can provide users with a perfect light environment experience, suitable for outdoor surface mounted applications.

## Product Features

- Body Material: Aluminum alloy extruded lamp body
- Optical System: Lens+ SUBROSA optical system
- Finish: Static electricity powder coating
- Projection direction: /
- Accessories/Brackets: /
- Certification: CCC
- IP Rating: IP65
- Insulation Level: Class I
- Operating Temperature: -20°C~50°C

## Product Specifications

- Shielding Angle: 35°
- LED Type: HIGH POWER LED
- Source Lm: 3000K 1000 LM, 4000K 1100LM;
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/4000K, Ra90
- SDCM: 3 SDCM
- Input: 220V-240V AC /50Hz
- Dimming: ON-OFF
- Net Weight: 0.55Kg without packing

## Order Model

Model	Length (mm)	LED Power (W)	LEDs (Quantity)	Driver	Beam	CCT	Finish
<b>AES301G</b> Linear Graze Slana series Surface mounting	119mm	<b>08</b> 8W	4 pcs	<b>EL</b> ON-OFF 220V AC Power Supply	<b>1</b> 15° <b>2</b> 26° <b>3</b> 36°	<b>30</b> 3000K <b>40</b> 4000K	<b>WT</b> White

Example: AES301G-08EL130WT

# SLANA LINEAR - MODEL: AES301G


# WAC ARCHITECTURAL

Surface mounting Luminaires


PROJECT:

TYPE:


## LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



<b>MODEL:</b>	AES301G-08EL130WT
<b>BEAM ANGLE:</b>	15.9 °
<b>POWER:</b>	10.45W
<b>LUMENS:</b>	504.5 lm
<b>CBCP:</b>	/
<b>EFFICACY:</b>	48.3 lm/W



<b>MODEL:</b>	AES301G-08EL230WT
<b>BEAM ANGLE:</b>	26.9 °
<b>POWER:</b>	10.45W
<b>LUMENS:</b>	464.8 lm
<b>CBCP:</b>	/
<b>EFFICACY:</b>	44.5 lm/W



<b>MODEL:</b>	AES301G-08EL330WT
<b>BEAM ANGLE:</b>	35.4 °
<b>POWER:</b>	10.45W
<b>LUMENS:</b>	436.6 lm
<b>CBCP:</b>	/
<b>EFFICACY:</b>	41.8 lm/W

# SLANA LINEAR - MODEL: AES303G


Surface mounting Luminaires

# WAC ARCHITECTURAL


PROJECT:

TYPE:

## Product Image

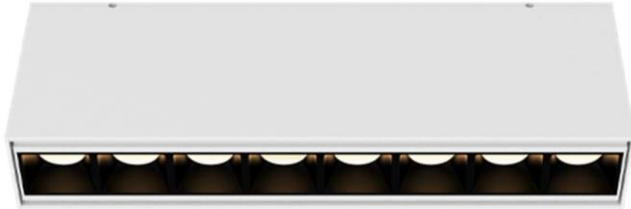

## Line Drawing

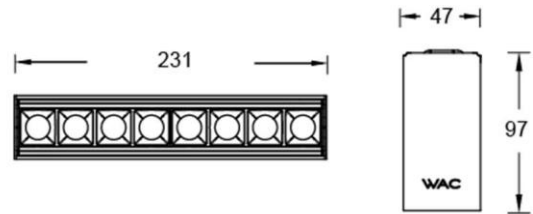

## Product Description

Surface mounted linear down lighting fixtures, using SUBROSA hidden light technology, are more decorative in building lighting, with multiple light distribution and AC 220V input. Exquisite and meticulous appearance and structural design, as well as excellent optical performance, can provide users with a perfect light environment experience, suitable for outdoor surface mounted applications.

## Product Features

- Body Material: Aluminum alloy extruded lamp body
- Optical System: Lens+ SUBROSA optical system
- Finish: Static electricity powder coating
- Projection direction: /
- Accessories/Brackets: /
- Certification: CCC
- IP Rating: IP65
- Insulation Level: Class I
- Operating Temperature: -20°C~50°C

## Product Specifications

- Shielding Angle: 35°
- LED Type: HIGH POWER LED
- Source Lm: 3000K 2000LM,4000K 2200LM;
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/4000K, Ra90
- SDCM: 3 SDCM
- Input: 220V-240V AC /50Hz
- Dimming: ON-OFF or 0-10V Dimming
- Net Weight: 0.7Kg without packing

## Order Model

Model	Length (mm)	LED Power (W)	LEDs (Quantity)	Driver	Beam	CCT	Finish
<b>AES303G</b> Linear Graze Slana series Surface mounting	231mm	<b>16</b> 16W	8pcs	<b>EL</b> ON-OFF 220V AC Power Supply <b>DL</b> 0-10V Dimming 220V AC Power Supply	<b>1</b> 15° <b>2</b> 26° <b>3</b> 36°	<b>30</b> 3000K <b>40</b> 4000K	<b>WT</b> White

Example: AES303G-16EL130WT

# SLANA LINEAR - MODEL: AES303G

Surface mounting Luminaires


# WAC ARCHITECTURAL

PROJECT:


TYPE:

## Accessory


## LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



<b>MODEL:</b>	AES303G-16EL130WT
<b>BEAM ANGLE:</b>	15.8 °
<b>POWER:</b>	19.7W
<b>LUMENS:</b>	958 lm
<b>CBCP:</b>	/
<b>EFFICACY:</b>	48.6 lm/W



<b>MODEL:</b>	AES303G-16EL230WT
<b>BEAM ANGLE:</b>	26.9 °
<b>POWER:</b>	19.7W
<b>LUMENS:</b>	962.3 lm
<b>CBCP:</b>	/
<b>EFFICACY:</b>	48.9 lm/W



<b>MODEL:</b>	AES303G-16EL330WT
<b>BEAM ANGLE:</b>	35 °
<b>POWER:</b>	19.7W
<b>LUMENS:</b>	851 lm
<b>CBCP:</b>	/
<b>EFFICACY:</b>	43.2 lm/W

# SLANA LINEAR - MODEL: AES305G

# WAC ARCHITECTURAL


## Surface mounting Luminaires

PROJECT:

TYPE:

### Product Image

### Line Drawing

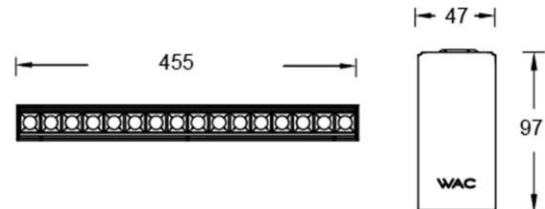

### Product Description

Surface mounted linear down lighting fixtures, using SUBROSA hidden light technology, are more decorative in building lighting, with multiple light distribution and AC220V input. Exquisite and meticulous appearance and structural design, as well as excellent optical performance, can provide users with a perfect light environment experience, suitable for outdoor surface mounted applications.

### Product Features

- Body Material: Aluminum alloy extruded lamp body
- Optical System: Lens+ SUBROSA optical system
- Finish: Static electricity powder coating
- Projection direction: /
- Accessories/Brackets: /
- Certification: CCC
- IP Rating: IP65
- Insulation Level: Class I
- Operating Temperature: -20°C~50°C

### Product Specifications

- Shielding Angle: 35°
- LED Type: HIGH POWER LED
- Source Lm: 3000K 4000LM,4000K 4400LM;
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/4000K, Ra90
- SDCM: 3 SDCM
- Input: 220V-240V AC /50Hz
- Dimming: ON-OFF or 0-10V Dimming
- Net Weight: 1.2Kg without packing

### Order Model

Model	Length (mm)	LED Power (W)	LEDs (Quantity)	Driver	Beam	CCT	Finish	
<b>AES305G</b>				<b>EL</b> ON-OFF	<b>1</b> 15°			
Linear Graze	455mm	32 32W	16pcs	220V AC Power Supply	<b>2</b> 26°	<b>30</b> 3000K	<b>WT</b>	
Slana series				<b>DL</b> 0-10V Dimming	<b>3</b> 36°			<b>41</b> 4000K
Surface mounting				220V AC Power Supply				

Example: AES305G-32EL130WT

# SLANA LINEAR - MODEL: AES305G

Surface mounting Luminaires


# WAC ARCHITECTURAL

PROJECT:


TYPE:

## Accessory


## LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



<b>MODEL:</b>	AES305G-32EL130WT
<b>BEAM ANGLE:</b>	15.9°
<b>POWER:</b>	36.6W
<b>LUMENS:</b>	1920 lm
<b>CBCP:</b>	/
<b>EFFICACY:</b>	52.5 lm/W



<b>MODEL:</b>	AES305G-32EL230WT
<b>BEAM ANGLE:</b>	26.9°
<b>POWER:</b>	36.6W
<b>LUMENS:</b>	1871 lm
<b>CBCP:</b>	/
<b>EFFICACY:</b>	51.1 lm/W



<b>MODEL:</b>	AES305G-32EL330WT
<b>BEAM ANGLE:</b>	36°
<b>POWER:</b>	36.6W
<b>LUMENS:</b>	1642 lm
<b>CBCP:</b>	/
<b>EFFICACY:</b>	44.88 lm/W