

ZIGGY - MODEL: ASL11

WAC ARCHITECTURAL

Mini Track Luminaires (24V) Low Voltage Artistic Track Luminaires

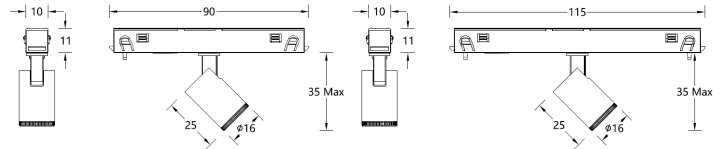
Product Name:

Type:

Product Image




Line Drawing



ASL11SLD01-E-1/2/3/6/W

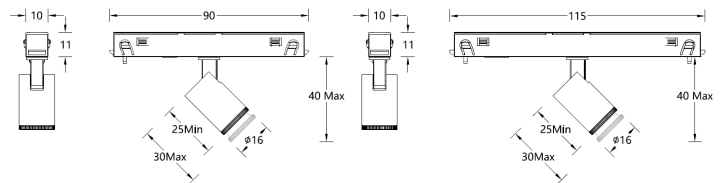ASL11SLD01-O-1/2/3/6/W



ASL11SLD01-E-F FOCUS

ASL11SLD01-O-F FOCUS

Product Description

24V Low Voltage Extremely Narrow Artistic Track Luminaire for WAC ZIGGY series 2-wire track system. The fixture is mobile and compact. It utilizes WAC's leading SUBROSA technology with a 30° anti-glare angle for ultimate anti-glare effect. The beam angle can be infinitely adjusted to meet the needs of different applications, and is widely used in museums and art galleries.

Product Features

- **Body Material:** Aluminum alloy body, glass optics
- **Optical System:** Lens and SUBROSA Reflector Dual Light Distribution
- **Finish:** Liquid Baked Enamel, Black (BK)
- **Projection Direction:** Horizontal 0°~365° adjustment; Vertical 0~90° adjustment
- **Accessory/ Bracket/:** See attached table
- **Certification:** CQC
- **IP Rating:** IP20
- **Insulation Level:** Class III
- **Operating Temperature:** -20°C~40°C

Product Specifications

- **LED Type:** HP LED
- **Power:** 1.5W
- **Source Lm:** 3000K: 160lm; 4000K: 170lm
- **LED Lifetime:** >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K / 4000K; Ra90 or Ra97 optional
- **SDCM:** 3 SDCM
- **Input:** 24VDC
- **Dimming:** Support system dimming (E) or knob & system two-in-one dimming (O); the above need to be in advance with the project site to do matching test.
- **Net Weight:** Approx. 20g, excluding packaging

Order Model

| Model | LED | Dimming | Beam | CRI | CCT | Finish |
|-----------------|---------------|---|----------|--------------|----------------------|----------|
| ASL11S ZIGGY | LD01 LED 1.5W | E Sys. Dimming① O On-boarding & Sys. dimming | F 10-40° | 9 90 A 97 | 30 3000K 40 4000K | BK Black |
| | | | 1 15° | | | |
| | | | 2 24° | | | |
| | | | 3 36° | | | |
| | | | 6 60° | | | |
| | | | W Wash | | | |

Example: ASL11SLD01-EF930BK

Note: ①Support system dimming, need to match the external dimmable constant voltage appliances (dimming mode is determined by the constant voltage appliances).

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP
TECHNOLOGY ILLUMINATED

WAC Lighting reserves the right to periodically design and update products. 2025-08-12

ZIGGY - MODEL: ASL11



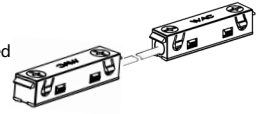
WAC ARCHITECTURAL

Mini Track Luminaires (24V) Low Voltage Artistic Track Luminaires

Product Name:

Type:


Accessories

| | | |
|---|---|---|
| <p>Low Voltage Artistic Track</p> <p>ASMT05M-BK 0.5m Track 12.5 ASMT10M-BK 1.0m Track ASMT15M-BK 1.5m Track ASMT20M-BK 2.0m Track</p>  | <p>Track power supply end (with a 0.3m piece of wire) ASMIE-BK</p>  | <p>Flexible track connector (wire length 3cm) Available for I- or L-shaped corners ASMI-BK</p>  |
|---|---|---|

Note: The low voltage track is surface mounted and comes with two end caps.

System Dimming Wiring Diagram (Luminaire Model: ASL11SLD01-E)

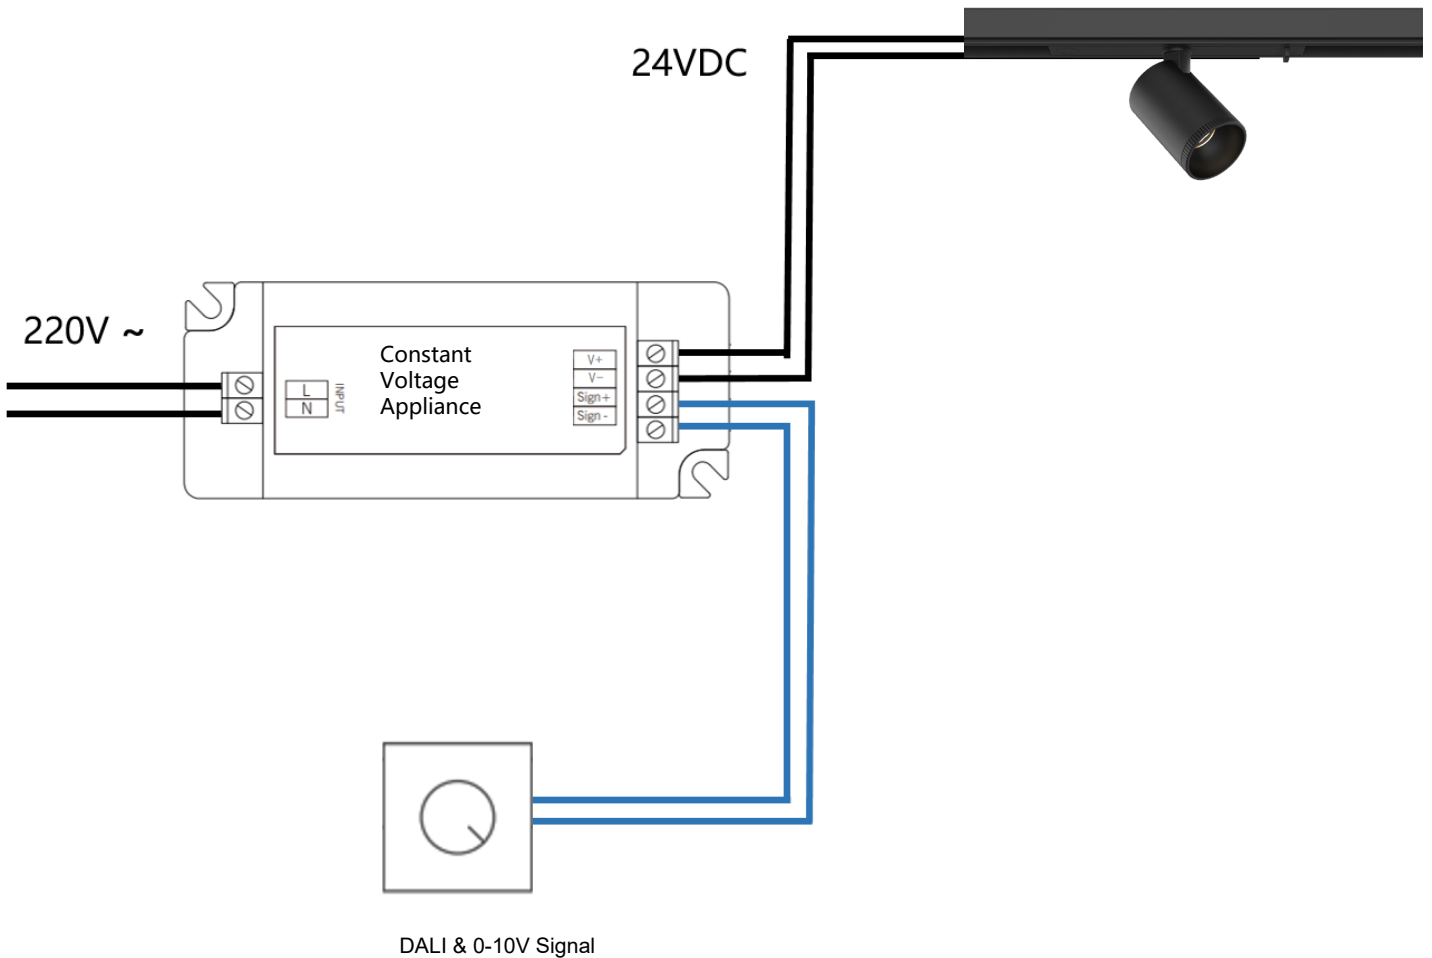Low-voltage fixtures can support the circuit centralized system dimming, wiring schematic as follows (dimming mode is determined by the constant voltage appliance), need to do a good job in advance of the dimming matchability test.



ZIGGY - MODEL: ASL12

WAC ARCHITECTURAL

Mini Track Luminaires (24V) Low Voltage Artistic Track Luminaires

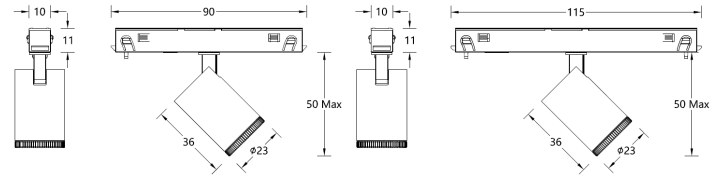
Product Name:

Type:

Product Image




Line Drawing



ASL12SLD03-E-1/2/3/6/W

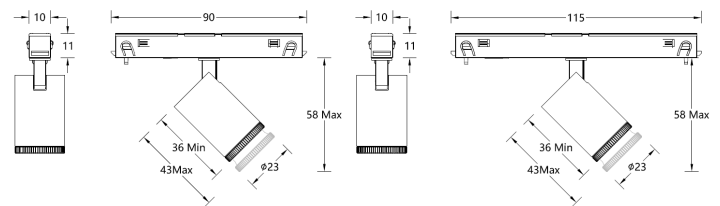ASL12SLD03-O-1/2/3/6/W



ASL12SLD03-E-F FOCUS

ASL12SLD03-O-F FOCUS

Product Description

24V Low Voltage Extremely Narrow Artistic Track Luminaire for WAC ZIGGY series 2-wire track system. The fixture is mobile and compact. It utilizes WAC's leading SUBROSA technology with a 30° anti-glare angle for ultimate anti-glare effect. The beam angle can be infinitely adjusted to meet the needs of different applications, and is widely used in museums and art galleries.

Product Features

- **Body Material:** Aluminum alloy body, glass optics
- **Optical System:** Lens and SUBROSA Reflector Dual Light Distribution
- **Finish:** Liquid Baked Enamel, Black (BK)
- **Projection Direction:** Horizontal 0°~365° adjustment; Vertical 0~90° adjustment
- **Accessory/ Bracket/:** See attached table
- **Certification:** CQC
- **IP Rating:** IP20
- **Insulation Level:** Class III
- **Operating Temperature:** -20°C~40°C

Product Specifications

- **LED Type:** HP LED
- **Power:** 3W
- **Source Lm:** 3000K: 320lm; 4000K: 340lm
- **LED Lifetime:** >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K / 4000K; Ra90 or Ra97 optional
- **SDCM:** 3 SDCM
- **Input:** 24VDC
- **Dimming:** Support system dimming (E) or knob & system two-in-one dimming (O); the above need to be in advance with the project site to do matching test.
- **Net Weight:** Approx. 40g, excluding packaging

Order Model

| Model | LED | Dimming | Beam | CRI | CCT | Finish |
|-----------------|-------------|---|----------|--------------|----------------------|----------|
| ASL12S ZIGGY | LD03 LED 3W | E Sys. Dimming① O On-boarding & Sys. dimming | F 10-40° | 9 90 A 97 | 30 3000K 40 4000K | BK Black |
| | | | 1 15° | | | |
| | | | 2 24° | | | |
| | | | 3 36° | | | |
| | | | 6 60° | | | |
| | | | W Wash | | | |

Example: ASL12SLD03-EF930BK

Note: ①Support system dimming, need to match the external dimmable constant voltage appliances (dimming mode is determined by the constant voltage appliances).

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP
TECHNOLOGY ILLUMINATED

WAC Lighting reserves the right to periodically design and update products. 2025-08-12

ZIGGY - MODEL: ASL12




WAC ARCHITECTURAL

Mini Track Luminaires (24V) Low Voltage Artistic Track Luminaires

Product Name:

Type:


Accessories

| | | |
|---|---|---|
| <p>Low Voltage Artistic Track</p> <p>ASMT05M-BK 0.5m Track 12.5 ASMT10M-BK 1.0m Track ASMT15M-BK 1.5m Track ASMT20M-BK 2.0m Track</p>  | <p>Track power supply end (with a 0.3m piece of wire) ASMIE-BK</p>  | <p>Flexible track connector (wire length 3cm) Available for I- or L-shaped corners ASMI-BK</p>  |
|---|---|---|

Note: The low voltage track is surface mounted and comes with two end caps.

System Dimming Wiring Diagram (Luminaire Model: ASL12SLD03-E)

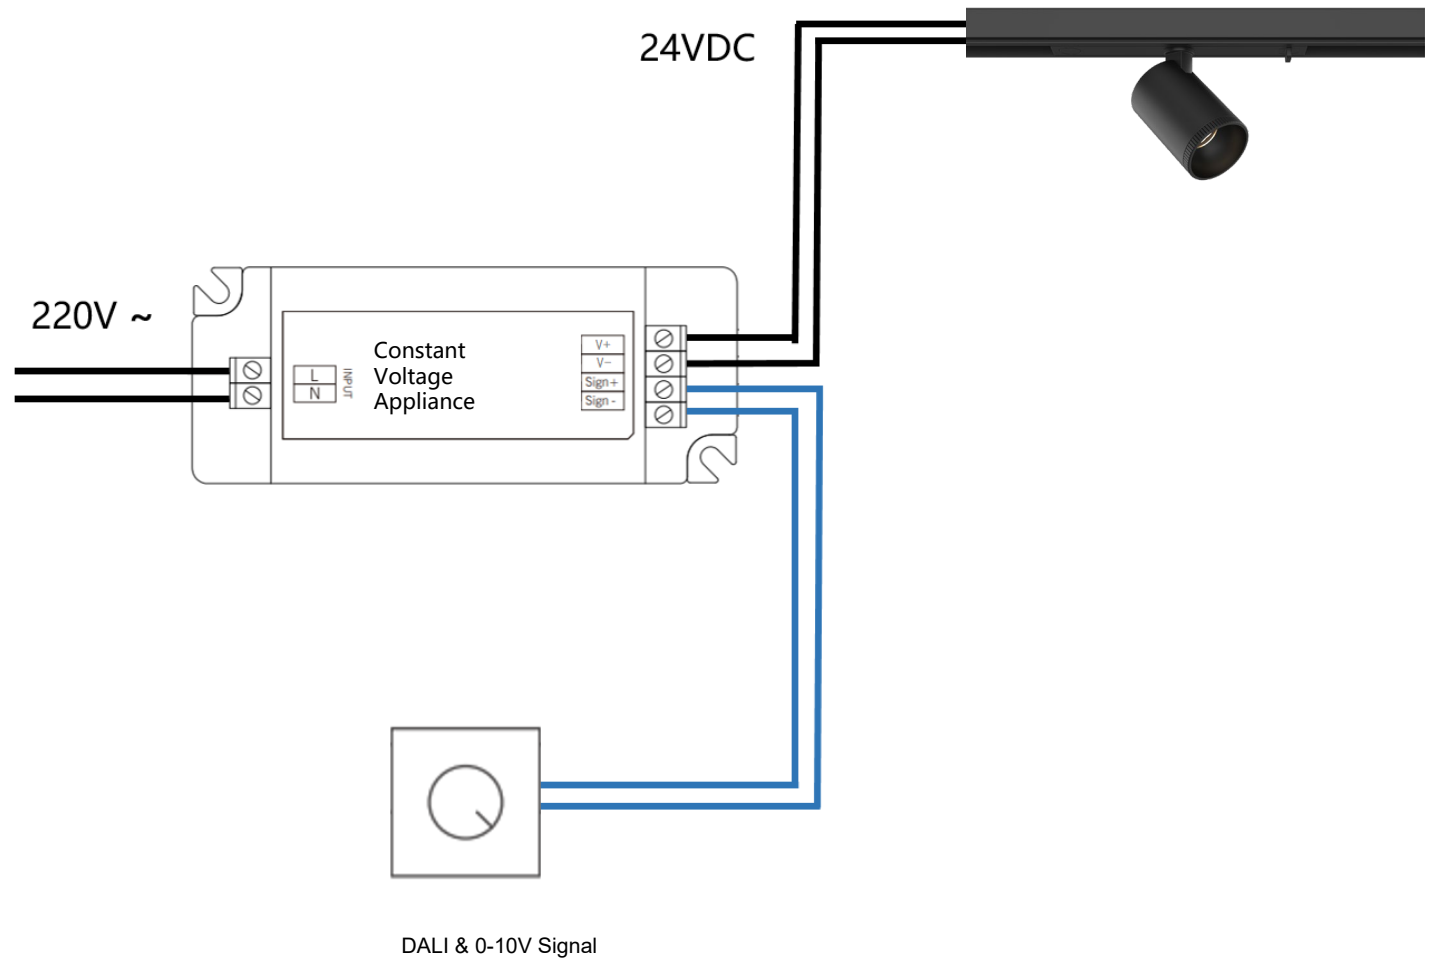Low-voltage fixtures can support the circuit centralized system dimming, wiring schematic as follows (dimming mode is determined by the constant voltage appliance), need to do a good job in advance of the dimming matchability test.



ZIGGY - MODEL: ASL13

WAC ARCHITECTURAL

Mini Track Luminaires (24V) Low Voltage Artistic Track Luminaires

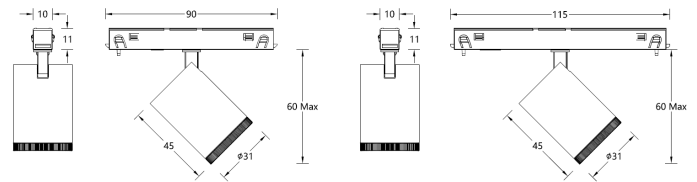
Product Name:

Type:

Product Image




Line Drawing



ASL13SLD05-E-1/2/3/6/W

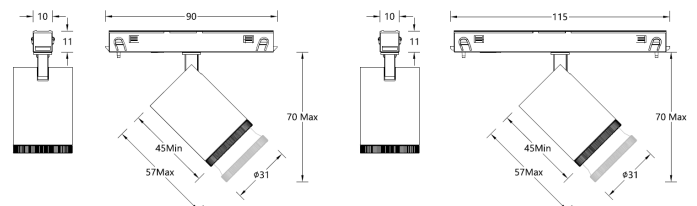ASL13SLD05-O-1/2/3/6/W



ASL13SLD05-E-F FOCUS

ASL13SLD05-O-F FOCUS

Product Description

24V Low Voltage Extremely Narrow Artistic Track Luminaire for WAC ZIGGY series 2-wire track system. The fixture is mobile and compact. It utilizes WAC's leading SUBROSA technology with a 30° anti-glare angle for ultimate anti-glare effect. The beam angle can be infinitely adjusted to meet the needs of different applications, and is widely used in museums and art galleries.

Product Features

- **Body Material:** Aluminum alloy body, glass optics
- **Optical System:** Lens and SUBROSA Reflector Dual Light Distribution
- **Finish:** Liquid Baked Enamel, Black (BK)
- **Projection Direction:** Horizontal 0°~365° adjustment; Vertical 0~90° adjustment
- **Accessory/ Bracket/:** See attached table
- **Certification:** CQC
- **IP Rating:** IP20
- **Insulation Level:** Class III
- **Operating Temperature:** -20°C~40°C

Product Specifications

- **LED Type:** HP LED
- **Power:** 5W
- **Source Lm:** 3000K: 520lm; 4000K: 540lm
- **LED Lifetime:** >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K / 4000K; Ra90 or Ra97 optional
- **SDCM:** 3 SDCM
- **Input:** 24VDC
- **Dimming:** Support system dimming (E) or knob & system two-in-one dimming (O); the above need to be in advance with the project site to do matching test.
- **Net Weight:** Approx. 70g, excluding packaging

Order Model

| Model | LED | Dimming | Beam | CRI | CCT | Finish |
|-----------------|-------------|---|----------|--------------|----------------------|----------|
| ASL13S ZIGGY | LD05 LED 5W | E Sys. Dimming① O On-boarding& Sys. dimming | F 10-40° | 9 90 A 97 | 30 3000K 40 4000K | BK Black |
| | | | 1 15° | | | |
| | | | 2 24° | | | |
| | | | 3 36° | | | |
| | | | 6 60° | | | |
| | | | W Wash | | | |

Example: ASL13SLD05-EF930BK

Note: ①Support system dimming, need to match the external dimmable constant voltage appliances (dimming mode is determined by the constant voltage appliances).

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP
TECHNOLOGY ILLUMINATED

WAC Lighting reserves the right to periodically design and update products. 2025-08-12

ZIGGY - MODEL: ASL13




WAC ARCHITECTURAL

Mini Track Luminaires (24V) Low Voltage Artistic Track Luminaires

Product Name:

Type:

Accessories

| | | |
|---|---|---|
| <p>Low Voltage Artistic Track</p> <p>ASMT05M-BK 0.5m Track 12.5 ASMT10M-BK 1.0m Track ASMT15M-BK 1.5m Track ASMT20M-BK 2.0m Track</p>  | <p>Track power supply end (with a 0.3m piece of wire) ASMIE-BK</p>  | <p>Flexible track connector (wire length 3cm) Available for I- or L-shaped corners ASMI-BK</p>  |
|---|---|---|

Note: The low voltage track is surface mounted and comes with two end caps.

System Dimming Wiring Diagram (Luminaire Model: ASL13SLD05-E)

Low-voltage fixtures can support the circuit centralized system dimming, wiring schematic as follows (dimming mode is determined by the constant voltage appliance), need to do a good job in advance of the dimming matchability test.

