

FUEGO COMPACT- MODEL: AEIR7M

WAC ARCHITECTURAL

In-ground Luminaires


Project Name:

Type:

Product Image



Line Drawing

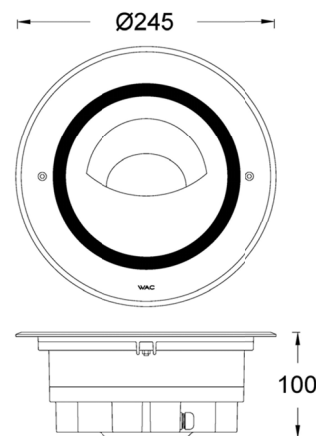

Product Description

FUEGO Compact adopts high quality 316 stainless steel for the face frame, aluminum die-casting and high temperature powder coating for the body. Suitable for outdoor environments, IP68 protection, IK10 anti-impact rating, anti-pressure 2000kg, high transmittance lens + patented anti-glare system. With the design of pre-buried cylinder, it is convenient for installation and maintenance. Applied to residential areas, such as parks, plazas, shopping centers as well as applied to facade lighting.

Product Features

- Body Material: Aluminum alloy die-casting + Stainless steel frame
- Optical System: Litebrush[®] Light waterfall wall washing system
- Finish: Static electricity powder coating
- Adjustable Angle: /
- Accessories: /
- Certification: CCC
- IP Rating: IK10, IP68 (Not suitable for permanent under water installation)
- Insulation Level: Class I
- Operating Temperature: -20°C~50°C

Product Specifications

- LED Type : COB
- LED Power: 22W Max
- Source Lm: 3000K 1980lm
- LED Lifetime: >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K, 3000K, 4000K, Ra90
- SDCM: 3 SDCM
- Input: 220V AC/50Hz
- Dimming: ON-OFF
- Net Weight: 2.76Kg without packing

Order Model

Model	Comment	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	CCT	Finish
AEIR7M	F Frame	22 21(Max)	COB	1051	EL ON-OFF 220V AC Power Supply	W Wall Washer	27 2700K	SS Stainless Steel
							30 3000K	
							40 4000K	

Example: AEIR7MF-22ELW27SS

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP
TECHNOLOGY ILLUMINATED

FUEGO COMPACT- MODEL: AEIR7M

WAC ARCHITECTURAL

In-ground Luminaires


Project Name:

Type:

Accessory

Item	Description	Pic	Description Dimensions
AEIR5MF-RC001	Recessed Casing		

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

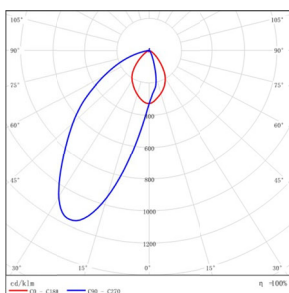

MODEL: AEIR7MF-22ELW30SS

BEAM ANGLE: WALL WASHER

POWER: 24.9W

LUMENS: 1051 LM

CBCP: /

EFFICACY: 42.2 LM /W