

# XKGY /XGT VKE CN/'O QF GN<CGNX325"

Nkpgct'Nwo kpckt gu" "


WAC ARCHITECTURAL

RTQLGEV

Vl RG

## Rt qf wevKō ci g

## Nlpg'F t cy lpi "



## Rt qf wevF guet lr vlap"

Vj g'Dgceqp'Xlgy "Xgt vkecn'ugt lgu'iki j v lpi "hkz wt gu'ctg"gs vkr r gf 'y kj 'j ki j /s wcrkv{ 'ej kr u'y kj 'utqpi 'iki j v'ghhkegpe{ "cpf "rqi rihgur cp."cu'y gni'cu'rgpugu'y kj "wpls wg"qr vkecn'r gthqto cpeg0Ego dlpf 'y kj "gs vlf kucpv'rc { qwf'f guki p."yj g{ "gputg'wplkqto rki j v'qwr w0R88"y cvgr tqqh'tcvlpi "cpf "F O Z 734"flō o lpi "eqvtqn'Xlgy "Xgt vkecn'ugt lgu'ico r u'eqo g'qwf'htqo "yj g'ul'f g'qt dqwqo ."cpf "yj g'ur gekm{ "eqphki wt gf "I qtg"dtgc vj lpi "xcrkg'ecp"ghge vkgm{ "dcm:peg"yj g'lpvgt pcn'cpf "gzvgt pcn'ck"r tguuwt g'vq r t g x g p'eqpf gpuc vlap."o gg v lpi "yj g'tgs vkt go gpui'qh'NGGF "qwf qat'iki j v lpi "r qy gt'eqpuwo r vlap'f guki p0

## Rt qf wevHgc wt gu'

## Rt qf wevUr gelhlec vlapu'

- Dqf { 'O cvgtlcn< Cno kpwo " gz vwf gf" iro r" dqf {."
- Qr vkecn'U{ uvgō < Ngpu'
- Hpluj < Ucvle'grge vtekv{ 'r qy f gt'eqcvlpi "
- Rtqlge vlap'f k ge vlap< I'
- Cee guuqt lgu d t ceng v< Uclprguu' uvggn' hz gf " dtcengv' gputw gu' r t gekug'clo lpi "cpf "eqvlpv q wu'iki j v lpi "
- Egt v hlec vlap< ESE"
- R'R' Tcvlpi < R88"
- Kpuwv vlap'Ngxgn< Eruu'K"
- Qr gtcv lpi "Vgo r gtcwt g<" /42°C & 72°C

- NGF "V{ r g< J ki j "Rqy gt"
- NGF "Rqy gt< 8(Y (Max) /300mm
- Source Lm: 3000K 483lm ;4000K 513lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K, Ra80 4000K, Ra80
- SDCM: 3 SDCM
- Input: 24V DC
- Dimming: ON-OFF or DMX512 dimming control
- Net Weight: 0.5Kg without packing

## Order Model

Model	Length	Power	LED Quantity	Max Lumens	Control Systems	Beam	Power Feed type	CCT	Finish
AELV103-07	300mm	7W(Max)	3	368 LM	ET ON-OFF 24V DC Power Supply MT DMX512 Dimming 24V DC Power Supply	C 60° × 100°	S Side B Bottom	30 3000K 40 4000K	B Black

Example: AELV103-07ET-CS30B

WAC Lighting  
www.waclighting.com (US)  
www.waclighting.net (International)

Headquarters  
44 Harbor Park Drive • Port Washington, NY  
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP  
TECHNOLOGY ILLUMINATED

WAC Lighting reserves the right to periodically design and update products. 2025-08-12

# VIEW-VERTICAL - MODEL: AELV103


Linear Luminaires

WAC ARCHITECTURAL

PROJECT:

TYPE:

## LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



<b>MODEL:</b>	AELV103-07ET-CS30B
<b>BEAM</b>	60 °×100 °
<b>ANGLE:</b>	
<b>POWER:</b>	8.9W/300mm
<b>LUMENS:</b>	368lm
<b>CBCP:</b>	/
<b>EFFICACY:</b>	41.3lm/W

# VIEW-VERTICAL - MODEL: AELV106

Linear Luminaires

WAC ARCHITECTURAL


PROJECT:

TYPE:

## Product Image



## Line Drawing

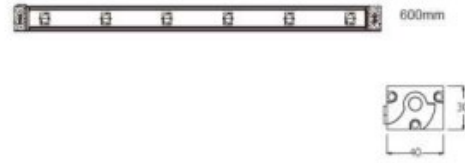

## Product Description

The Beacon View Vertical series lighting fixtures are equipped with high-quality chips with strong light efficiency and long lifespan, as well as lenses with unique optical performance. Combined with equidistant layout design, they ensure uniform light output. IP66 waterproof rating and DMX512 dimming control, View Vertical series lamps come out from the side or bottom, and the specially configured Gore breathing valve can effectively balance the internal and external air pressure to prevent condensation, meeting the requirements of LEED outdoor lighting power consumption design.

## Product Features

- Body Material: Aluminum extruded lamp body, aluminum die cast end cover
- Optical System: Lens
- Finish: Static electricity powder coating
- Projection direction: /
- Accessories/brackets: Stainless steel fixed bracket ensures precise aiming and continuous lighting
- Certification: CQC
- IP Rating: IP66
- Insulation Level: Class III
- Operating Temperature: -20°C~50°C

## Product Specifications

- LED Type: High Power
- LED Power: 13.2W (Max) /600mm
- Source Lm: 3000K 966lm ;4000K 1026lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K, Ra80 4000K, Ra80
- SDCM: 3 SDCM
- Input: 24V DC
- Dimming: ON-OFF or DMX512 dimming control
- Net Weight: 1Kg without packing

## Order Model

Model	Length	Power	LED Quantity	Max Lumens	Control Systems	Beam	Power Feed type	CCT	Finish
AELV106-14	600mm	14W(Max)	6	748 LM	ET ON-OFF 24V DC Power Supply MT DMX512 Dimming 24V DC Power Supply	C 60°×100°	S Side B Bottom	30 3000K 40 4000K	B Black

Example: AELV106-14ET-CS30B

# VIEW-VERTICAL - MODEL: AELV106


Linear Luminaires

WAC ARCHITECTURAL

PROJECT:

TYPE:

## LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



<b>MODEL:</b>	AELV106-14ET-CS30B
<b>BEAM</b>	60 °×100 °
<b>ANGLE:</b>	
<b>POWER:</b>	16.3W/600mm
<b>LUMENS:</b>	748lm
<b>CBCP:</b>	/
<b>EFFICACY:</b>	45.8lm/W

# VIEW-VERTICAL - MODEL: AELV109

Linear Luminaires

WAC ARCHITECTURAL


PROJECT:

TYPE:

## Product Image



## Line Drawing

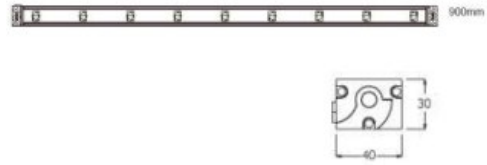

## Product Description

The Beacon View Vertical series lighting fixtures are equipped with high-quality chips with strong light efficiency and long lifespan, as well as lenses with unique optical performance. Combined with equidistant layout design, they ensure uniform light output. IP66 waterproof rating and DMX512 dimming control, View Vertical series lamps come out from the side or bottom, and the specially configured Gore breathing valve can effectively balance the internal and external air pressure to prevent condensation, meeting the requirements of LEED outdoor lighting power consumption design.

## Product Features

- Body Material: Aluminum extruded lamp body, aluminum die cast end cover
- Optical System: Lens
- Finish: Static electricity powder coating
- Projection direction: /
- Accessories/brackets: Stainless steel fixed bracket ensures precise aiming and continuous lighting
- Certification: CQC
- IP Rating: IP66
- Insulation Level: Class III
- Operating Temperature: -20°C~50°C

## Product Specifications

- LED Type: High Power
- LED Power: 19.8W (Max) /900mm
- Source Lm: 3000K 1449lm ;4000K 1539m
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K, Ra80 4000K, Ra80
- SDCM: 3 SDCM
- Input: 24V DC
- Dimming: ON-OFF or DMX512 dimming control
- Net Weight: 1.5Kg without packing

## Order Model

Model	Length	Power	LED Quantity	Max Lumens	Control Systems	Beam	Power Feed type	CCT	Finish
AELV109-21	900mm	21W(Max)	9	1088 LM	ET ON-OFF 24V DC Power Supply MT DMX512 Dimming 24V DC Power Supply	C 60°×100°	S Side	30 3000K 40 4000K	B Black

Example: ELV109-21ET-CS30B

# VIEW-VERTICAL - MODEL: AELV109


Linear Luminaires

WAC ARCHITECTURAL

PROJECT:

TYPE:

## LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



<b>MODEL:</b>	AELV109-21ET-CS30B
<b>BEAM</b>	60 °×100 °
<b>ANGLE:</b>	
<b>POWER:</b>	23.8W/900mm
<b>LUMENS:</b>	1088lm
<b>CBCP:</b>	/
<b>EFFICACY:</b>	45.7lm/W

# VIEW-VERTICAL - MODEL: AELV112

Linear Luminaires

WAC ARCHITECTURAL


PROJECT:

TYPE:

## Product Image



## Line Drawing

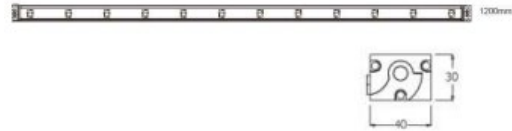

## Product Description

The Beacon View Vertical series lighting fixtures are equipped with high-quality chips with strong light efficiency and long lifespan, as well as lenses with unique optical performance. Combined with equidistant layout design, they ensure uniform light output. IP66 waterproof rating and DMX512 dimming control, View Vertical series lamps come out from the side or bottom, and the specially configured Gore breathing valve can effectively balance the internal and external air pressure to prevent condensation, meeting the requirements of LEED outdoor lighting power consumption design.

## Product Features

- Body Material: Aluminum extruded lamp body, aluminum die cast end cover
- Optical System: Lens
- Finish: Static electricity powder coating
- Projection direction: /
- Accessories/brackets: Stainless steel fixed bracket ensures precise aiming and continuous lighting
- Certification: CQC
- IP Rating: IP66
- Insulation Level: Class III
- Operating Temperature: -20°C~50°C

## Product Specifications

- LED Type: High Power
- LED Power: 26.4W (Max) /1200mm
- Source Lm: 3000K 1932lm ;4000K 2052m
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K, Ra80 4000K, Ra80
- SDCM: 3 SDCM
- Input: 24V DC
- Dimming: ON-OFF or DMX512 dimming control
- Net Weight: 2Kg without packing

## Order Model

Model	Length	Power	LED Quantity	Max Lumens	Control Systems	Beam	Power Feed type	CCT	Finish
AELV112-28	1200m m	28W(Max)	12	1399 LM	ET ON-OFF 24V DC Power Supply MT DMX512 Dimming 24V DC Power Supply	C 60°×100°	S Side B Bottom	30 3000K 40 4000K	B Black

Example: AELV112-28ET-CS30B

# VIEW-VERTICAL - MODEL: AELV112


Linear Luminaires

WAC ARCHITECTURAL

PROJECT:

TYPE:

## LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



<b>MODEL:</b>	AELV112-28ET-CS30B
<b>BEAM</b>	60 °×100 °
<b>ANGLE:</b>	
<b>POWER:</b>	30.8W/1200mm
<b>LUMENS:</b>	1399lm
<b>CBCP:</b>	/
<b>EFFICACY:</b>	45.4lm/W