

SILO FOCUS - MODEL: AME15FLM

Surface Mounted Luminaires

WAC ARCHITECTURAL


PRODUCT

TYPE:

Product Image



Line Drawing

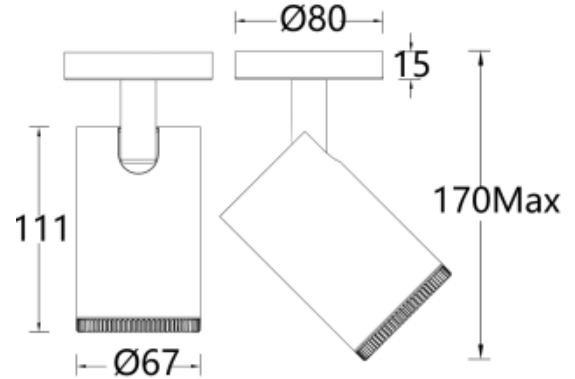

Product Description

SILO Focus series LED ceiling spotlights, exquisite appearance design, no visible radiator, made of die-cast aluminum lamp body, built-in stnon-flash drive electrical, using COB light module, can be stepless adjustment of light Angle, and the appearance size remains unchanged, can provide key lighting or environmental lighting, Widely used in various commercial Spaces, exhibition halls, hotels, retail and other places.

Product Features

- **Body Material:** Aluminum alloy die-cast lamp body
- **Optical System:** pancratic lens
- **Finish:** Electrostatic Powder coating, Black (BK), White (WT)
- **Adjustable Angle:** Level 0°~355° adjustment; Vertical adjustment 0~90°
- **Accessories:** Up to three optical accessories can be added, and only one of each type of accessories can be added at the same time
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C~40°C
- **Net Weight:** Approx. 0.5Kg, without packaging

Product specification

- **LED Type:** COB
- **Power:** 6W or 12W optional
- **Source Lm:** 2700K: 610lm (6W) / 1090lm (12W)
3000K: 670lm (6W) / 1200lm (12W)
4000K: 720lm (6W) / 1290lm (12W)
5000K: 770lm (6W) / 1380lm (12W)
- **LED Life:** >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 2700K / 3000K / 4000K / 5000K , >Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V~240V AC / 50Hz
- **Dimming:** Built-in knob dimming (dimming range 10%~100%) or 0-10V dimming (match test must be done with the project site in advance)

Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
AME15F SILO Focus	LM06 COB 6W	O On-board	F 12~50°	9 90	27 2700K	WT White BK Black
	LM12 COB 12W	D 0-10V			30 3000K	
					40 4000K	
					50 5000K	
AME15F	LM12	O	F	9	30	WT

Example: AME15FLM12-O-F930WT

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP
TECHNOLOGY ILLUMINATED

SILO FOCUS - MODEL: AME15FLM







Surface Mounted Luminaires

WAC ARCHITECTURAL

PRODUCT


TYPE:

Accessories


First class fittings	Striped glass lens ALENS-16-BEL-C 	Soft glass lenses ALENS-16-BSL-SW 	Frosted glass lenses ALENS-16-FR 	The endless bee net grid ALENS-16-HCL 
Second class fittings	Anti-glare tube ALENS-15-SNOOT 			
Third class fittings	Four leaf shade ATL-21-BD-SW 			

Note: Up to three optical accessories can be added, and each type of accessories can only be added one at a time


LIGHT DISTRIBUTION @3000K DATA

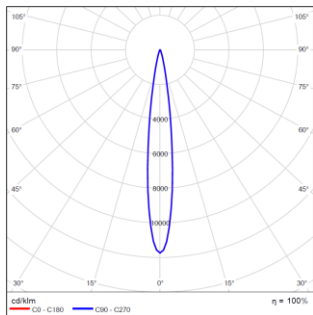


MODEL: AME15FLM06-OF930
BEAM ANGLE: 12°
POWER: 8W
LUMENS: 183lm
CBCP: 2395cd
EFFICACY: 23lm/W

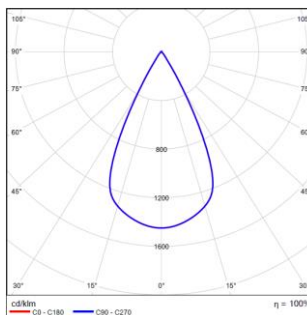

MODEL: AME15FLM06-OF930
BEAM ANGLE: 50°
POWER: 8W
LUMENS: 291lm
CBCP: 424cd
EFFICACY: 36lm/W

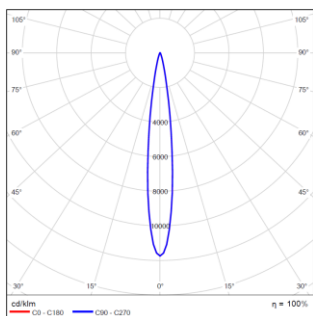

MODEL: AME15FLM12-OF930
BEAM ANGLE: 12°
POWER: 14W
LUMENS: 272lm
CBCP: 3187cd
EFFICACY: 19lm/W

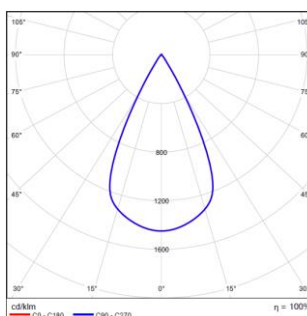

MODEL: AME15FLM12-OF930
BEAM ANGLE: 50°
POWER: 14W
LUMENS: 425lm
CBCP: 616cd
EFFICACY: 30lm/W

SILO FOCUS - MODEL: AME16FLM

Surface Mounted Luminaires

WAC ARCHITECTURAL


PRODUCT

TYPE:

Product Image



Line Drawing

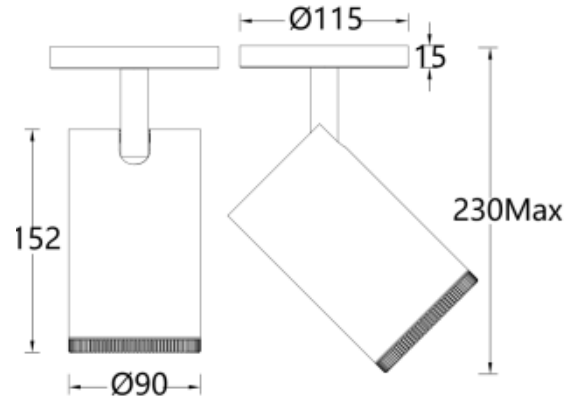

Product Description

SILO Focus series LED ceiling spotlights, exquisite appearance design, no visible radiator, made of die-cast aluminum lamp body, built-in stnon-flash drive electrical, using COB light module, can be stepless adjustment of light Angle, and the appearance size remains unchanged, can provide key lighting or environmental lighting, Widely used in various commercial Spaces, exhibition halls, hotels, retail and other places.

Product Features

- **Body Material:** Aluminum alloy die-cast lamp body
- **Optical System:** pancratic lens
Finish: Electrostatic Powder coating, Black (BK), White (WT)
Adjustable Angle: Level 0°~355° adjustment; Vertical adjustment 0~90°
- **Accessories:** Up to three optical accessories can be added, and only one of each type of accessories can be added at the same time
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C~40°C
- **Net Weight:** Approx. 1.0Kg, without packaging

Product specification

- **LED Type:** COB
- **Power:** 18W or 26W optional
- **Source Lm:** 2700K: 1550lm (18W) / 2270lm (26W)
3000K: 1700lm (18W) / 2500lm (26W)
4000K: 1820lm (18W) / 2670lm (26W)
5000K: 1950lm (18W) / 2870lm (26W)
- **LED Life:** >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 2700K / 3000K / 4000K / 5000K , >Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V~240V AC / 50Hz
- **Dimming:** Built-in knob dimming (dimming range 10%~100%) or 0-10V dimming (match test must be done with the project site in advance)

Model	LED	Dimming	Beam	CRI	CCT	Finish
AME16F SILO Focus	LM18 COB 18W	O On-board A DALI D 0-10V	F 12~50°	9 90	27 2700K	WT White BK Black
	LM26 COB 26W				30 3000K	
					40 4000K	
					50 5000K	
AME16F	LM18	O	F	9	30	WT

Example: AME16FLM18-OF930WT

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP
TECHNOLOGY ILLUMINATED

WAC Lighting reserves the right to periodically design and update products. 2025-08-12

SILO FOCUS - MODEL: AME16FLM








Surface Mounted Luminaires

WAC ARCHITECTURAL

PRODUCT


TYPE:

Accessories


First class fittings	Striped glass lens ALENS-73-BEL-C 	Soft glass lenses ALENS-73-BSL 	Frosted glass lenses ALENS-73-FR 	The endless bee net grid ALENS-73-HCL-C 
Second class fittings	Anti-glare tube ALENS-20-SNOOT 	Anti-glare bee-net grille ALENS-20-HCL 		
Third class fittings	Four leaf shade ALENS-73-BD 			

Note: Up to three optical accessories can be added, and each type of accessories can only be added one at a time


LIGHT DISTRIBUTION @3000K DATA

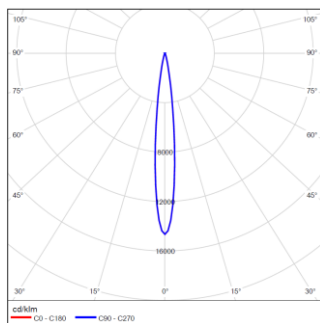


MODEL: AME16FLM18-OF930
BEAM ANGLE: 12°
POWER: 21W
LUMENS: 319lm
CBCP: 4670cd
EFFICACY: 15lm/W

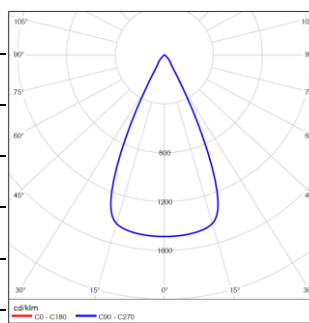

MODEL: AME16FLM18-OF930
BEAM ANGLE: 50°
POWER: 21W
LUMENS: 463lm
CBCP: 689cd
EFFICACY: 22lm/W

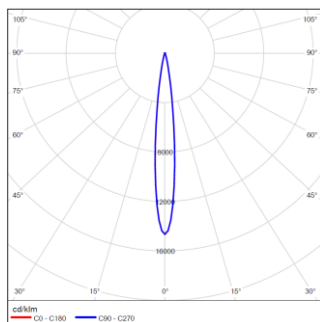

MODEL: AME16FLM26-OF930
BEAM ANGLE: 12°
POWER: 30W
LUMENS: 439lm
CBCP: 5859cd
EFFICACY: 15lm/W

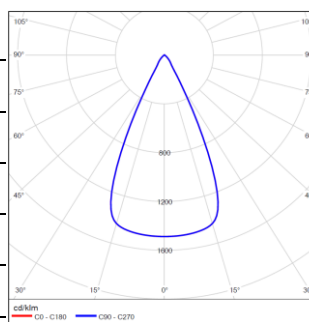

MODEL: AME16FLM26-OF930
BEAM ANGLE: 50°
POWER: 30W
LUMENS: 639lm
CBCP: 952cd
EFFICACY: 21lm/W

SILO FOCUS - MODEL: AME17FLM

Surface Mounted Luminaires

WAC ARCHITECTURAL


PRODUCT

TYPE:

Product Image



Line Drawing

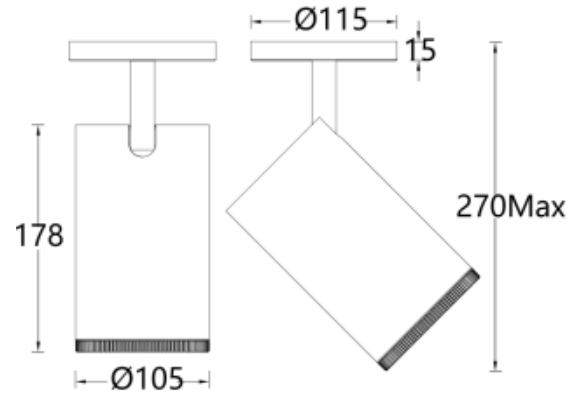

Product Description

SILO Focus series LED ceiling spotlights, exquisite appearance design, no visible radiator, made of die-cast aluminum, retail and other places.

Product Features

- **Body Material:** Aluminum alloy die-cast lamp body
- **Optical System:** pancratic lens
- **Finish:** Electrostatic Powder coating, Black (BK), White (WT)
- **Adjustable Angle:** Level 0°~355° adjustment; Vertical adjustment 0~90°
- **Accessories:** Up to three optical accessories can be added, and only one of each type of accessories can be added at the same time
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C~40°C
- **Net Weight:** Approx. 1.4Kg, without packaging

Product specification

- **LED Type:** COB
- **Power:** 34W
- **Source Lm:** 3280lm(2700k)/3660lm(3000k)
3880lm (4000K) / 4140lm (5000K)
- **LED Life:** >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 2700K / 3000K / 4000K / 5000K , >Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V~240V AC / 50Hz
- **Dimming:** Built-in knob dimming (dimming range 10%~100%) or 0-10V dimming (match test must be done with the project site in advance)

Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
AME17F SILO Focus	LM34 COB 34W	O On-board A DALI D 0-10V	F 12~50°	9 90	27 2700K 30 3000K 40 4000K 50 5000K	WT White BK Black
AME17F	LM34	O	F	9	30	WT

Example: AME17FLM34-OF930WT

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
 44 Harbor Park Drive • Port Washington, NY
 Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP
 TECHNOLOGY ILLUMINATED

SILO FOCUS - MODEL: AME17FLM








Surface Mounted Luminaires

WAC ARCHITECTURAL

PRODUCT


TYPE:

Accessories


First class fittings	Striped glass lens ALENS-73-BEL-C 	Soft glass lenses ALENS-73-BSL 	Frosted glass lenses ALENS-73-FR 	The endless bee net grid ALENS-73-HCL-C 
Second class fittings	Anti-glare tube ALENS-20-SNOOT 	Anti-glare bee-net grille ALENS-20-HCL 		
Third class fittings	Four leaf shade ATL-22-BD-SW 			

Note: Up to three optical accessories can be added, and each type of accessories can only be added one at a time

LIGHT DESTRIUTION @3000K DATA

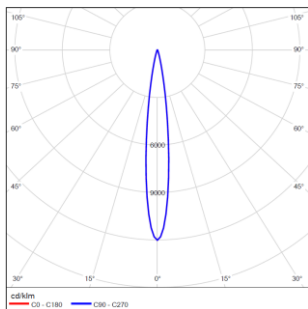

MODEL: AME17FLM34-OF930
BEAM ANGLE: 12°
POWER: 38W
LUMENS: 564lm
CBCP: 6780cd
EFFICACY: 15lm/W

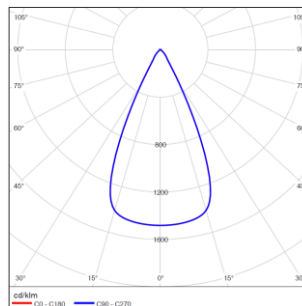

MODEL: AME17FLM34-OF930
BEAM ANGLE: 50°
POWER: 38W
LUMENS: 813lm
CBCP: 1205cd
EFFICACY: 21lm/W