

SILO WALL WASHER MODEL:AME15WLM

Surface Mounted Luminaires

WAC ARCHITECTURAL


PROJECT:

TYPE:

Product Image



Line Drawing

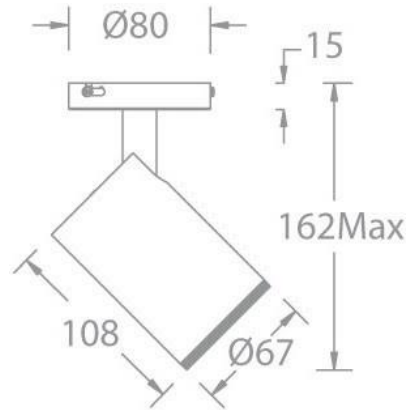

Product Description

SILO Wall Washer(referred to as WW) series LED ceiling spotlights with exquisite design, no visible radiator, die-cast aluminum body, built-in no stroboscopic drive, COB light module, providing a variety of standard color temperature options, with excellent wall washing light distribution and excellent color rendering., are widely used in museums, art galleries, commercial Spaces, hotels, retail and other places.

Product Features

- Body Material: Aluminum alloy die-cast lamp body
- Optical System: Double lens
- Finish: Electrostatic Powder coating, Black (BK), White (WT)
- Adjustable Angle: Horizontal 0°~355°; Vertical 0°~90°
- Accessories/Brackets: Optional light shade
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C
- Net Weight: 0.5Kg without packing

Product Specifications

- LED Type: COB
- LED Power: 6W or 12W optional
- Source Lm: 2700K: 760lm(6W)/1260lm(12W)
3000K: 800lm(6W)/1330lm(12W)
4000K: 850lm(6W)/1410lm(12W)
5000K: 860lm(6W)/1420lm(12W)
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K/3000K/4000K/5000K, > Ra90
- SDCM: 3SDCM
- Input: 220V~240V AC/50Hz
- Dimming: Dimming with built-in knob (10%~100%), 0-10V (A match test is required)

Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
AME15W SILO WW	LM06 COB 6W LM12 COB 12W	O On-board D 0-10V	W Wash	9 90	27 2700K 30 3000K 40 4000K 50 5000K	WT White BK Black
AME15W	LM12	O	W	9	30	WT

Example: AME15WLM12-OW930WT

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP
TECHNOLOGY ILLUMINATED

SILO WALL WASHER MODEL:AME15WLM
Surface Mounted Luminaires

WAC ARCHITECTURAL

PROJECT:


TYPE:

Accessories


Four leaf shade
ATL-21-BD-SW



LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

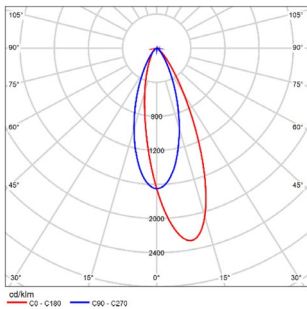

MODEL:	AME15WLM06-OW930
BEAM ANGLE:	Wall washer
POWER:	8W
LUMENS:	519 lm
CBCP:	/
EFFICACY:	65 lm/W

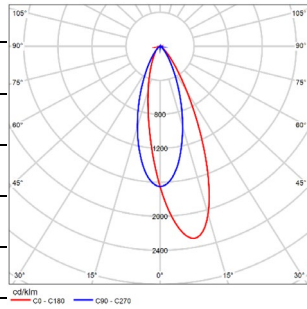

MODEL:	AME15WLM12-OW930
BEAM ANGLE:	Wall washer
POWER:	15W
LUMENS:	822 lm
CBCP:	/
EFFICACY:	55 lm/W

SILO WALL WASHER- MODEL:AME16WLM

Surface Mounted Luminaires

WAC ARCHITECTURAL


PROJECT:

TYPE:

Product Image



Line Drawing

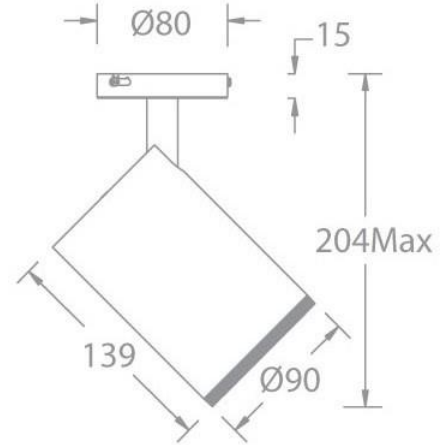

Product Description

SILO Wall Washer(referred to as WW) series LED ceiling spotlights with exquisite design, no visible radiator, die-cast aluminum body, built-in no stroboscopic drive, COB light module, providing a variety of standard color temperature options, with excellent wall washing light distribution and excellent color rendering., are widely used in museums, art galleries, commercial Spaces, hotels, retail and other places.

Product Features

- Body Material: Aluminum alloy die-cast lamp body
- Optical System: Double lens
- Finish: Electrostatic Powder coating, Black (BK), White (WT)
- Adjustable Angle: Horizontal 0°~355°; Vertical 0°~90°
- Accessories/Brackets: Optional light shade
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C
- Net Weight: 1.0Kg without packing

Product Specifications

- LED Type: COB
- LED Power: 18W or 26W optional
- Source Lm: 2700K: 2030lm(18W)/2710lm(26W)
3000K: 2120lm(18W)/2830lm(26W)
4000K: 2230lm(18W)/2970lm(26W)
5000K: 2330lm(18W)/3100lm(26W)
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K/3000K/4000K/5000K, > Ra90
- SDCM: 3SDCM
- Input: 220V~240V AC/50Hz
- Dimming: Dimming with built-in knob (10%~100%), DALI, 0-10V (A match test is required)

Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
AME16W SILO WW	LM18 COB 18W LM26 COB 26W	O On-board D 0-10V A DALI	W Wash	9 90	27 2700K	WT White BK Black
					30 3000K	
					40 4000K	
					50 5000K	
AME16W	LM18	O	W	9	30	WT

Example: AME16WLM18-OW930WT

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP
TECHNOLOGY ILLUMINATED

SILO WALL WASHER MODEL:AME16WLM
Surface Mounted Luminaires

WAC ARCHITECTURAL

PROJECT:


TYPE:

Accessories


Four leaf shade
ALENS-73-BD



LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

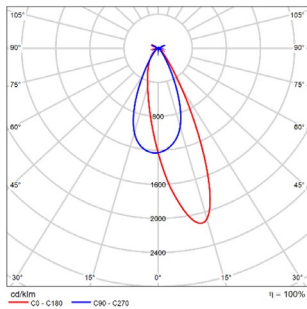

MODEL:	AME16WLM18-OW930
BEAM ANGLE:	Wall washer
POWER:	21W
LUMENS:	1555 lm
CBCP:	/
EFFICACY:	74 lm/W

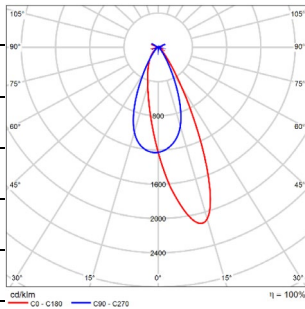

MODEL:	AME16WLM26-OW930
BEAM ANGLE:	Wall washer
POWER:	30W
LUMENS:	2061 lm
CBCP:	/
EFFICACY:	69 lm/W

SILO WALL WASHER MODEL:AME17WLM

Surface Mounted Luminaires

WAC ARCHITECTURAL


PROJECT:

TYPE:

Product Image



Line Drawing

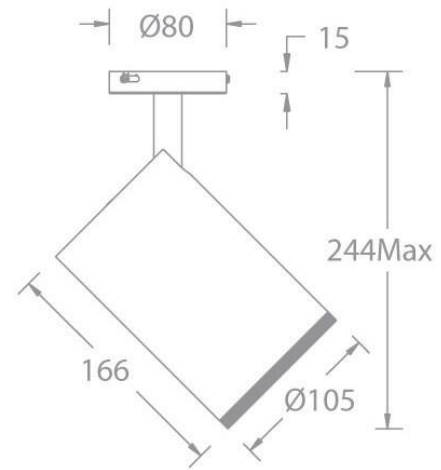

Product Description

SILO Wall Washer(referred to as WW) series LED ceiling spotlights with exquisite design, no visible radiator, die-cast aluminum body, built-in no stroboscopic drive, COB light module, providing a variety of standard color temperature options, with excellent wall washing light distribution and excellent color rendering., are widely used in museums, art galleries, commercial Spaces, hotels, retail and other places.

Product Features

- Body Material: Aluminum alloy die-cast lamp body
- Optical System: Double lens
- Finish: Electrostatic Powder coating, Black (BK), White (WT)
- Adjustable Angle: Horizontal 0°~355°; Vertical 0°~90°
- Accessories/Brackets: Optional light shade
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C
- Net Weight: 1.0Kg without packing

Product Specifications

- LED Type: COB
- LED Power: 34W1
- Source Lm: 2700K: 3390lm/3000K 3530lm
4000K: 3710lm/5000K 3880lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K/3000K/4000K/5000K, > Ra90
- SDCM: 3SDCM
- Input: 220V~240V AC/50Hz
- Dimming: Dimming with built-in knob (10%~100%), DALI, 0-10V (A match test is required)

Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
AME17W SILO WW	LM34 COB 34W	O On-board	W Wash	9 90	27 2700K	WT White BK Black
		D 0-10V			30 3000K	
		A DALI			40 4000K	
					50 5000K	
AME17W	LM34	O	W	9	30	WT

Example: AME17WLM34-OW930WT

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP
TECHNOLOGY ILLUMINATED

WAC Lighting reserves the right to periodically design and update products. 2025-08-12

SILO WALL WASHER MODEL:AME17WLM

Surface Mounted Luminaires

WAC ARCHITECTURAL

PROJECT:


TYPE:

Accessories

Four leaf shade
ATL-22-BD-SW



LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

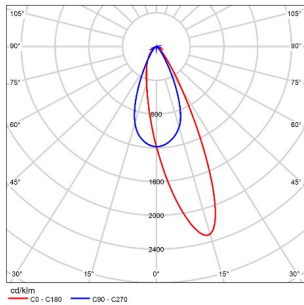

MODEL:	AME17WLM34-OW930
BEAM ANGLE:	Wall washer
POWER:	38W
LUMENS:	2464 lm
CBCP:	/
EFFICACY:	65 lm/W