

LIGNE III- MODEL: AOC2S


Linear Luminaires

WAC ARCHITECTURAL


Project Name:

Type:

Product Image

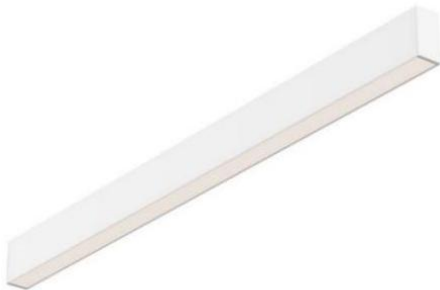

Line Drawing

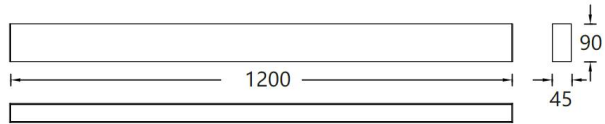

Product Description

The LIGNE III suspended linear luminaire features a sleek aluminum profile housing with a clean and modern appearance. Utilizing high-efficiency LED light sources, it offers excellent heat dissipation, energy-saving performance, and superior anti-glare control. The fixture supports end-to-end connection and customizable lengths, providing flexible design options for different lighting layouts. Ideal for commercial and office lighting applications, the LIGNE III delivers both functional illumination and refined aesthetics.

Product Features

- **Body Materials:** Aluminum die-casting lamp body
- **Optical System:** Anti-glare mask
- **Finishes:** Electrostatic powder coating
- **Objection Direction:** /
- **Accessory/Bracket:** /
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C— 40°C

Product Specifications

- **Shading Angle:** /
- **LED Type:** SMD LED
- **Source Lm:** 1.2m:4000lm@3000K;1.2m:4500lm@4000K
- **LED Lifetime:** > 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K/3500K/4000K/5000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V-240V AC / 50Hz
- **Dimming:** ON-OFF/0-10V/DALI(Matching tests must be done with the project site systems)
- **Net Weight:** Approx. 2.17Kg, without packaging

Order Model

Model	Length (mm)	Power (W)	Driver	Beam	CCT	Finish
AOC2S	12 1200	30 30W	E ON-OFF D 0-10V Dimming A DALI	P (Frosted cover)	30 3000K	WT White
				Y (Prismatic cover)	35 3500K	BK Black
					40 4000K	
					50 5000K	

Example: AOC2S-1230EY40WT

LIGNE III- MODEL: AOC2S

Linear Luminaires

WAC ARCHITECTURAL


Project Name:

Type:

Product Image



Line Drawing

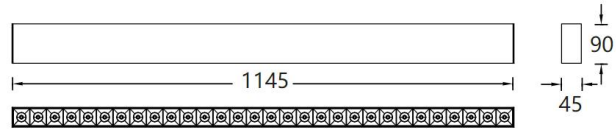

Product Description

The LIGNE III suspended linear luminaire features a sleek aluminum profile housing with a clean and modern appearance. Utilizing high-efficiency LED light sources, it offers excellent heat dissipation, energy-saving performance, and superior anti-glare control. The fixture supports end-to-end connection and customizable lengths, providing flexible design options for different lighting layouts. Ideal for commercial and office lighting applications, the LIGNE III delivers both functional illumination and refined aesthetics.

Product Features

- **Body Materials:** Aluminum die-casting lamp body
- **Optical System:** Lens+SUBROSA system
- **Finishes:** Electrostatic powder coating
- **Objection Direction:** /
- **Accessory/Bracket:** /
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C— 50°C

Product Specifications

- **Shading Angle:** 58°
- **LED Type:** High Power LED
- **Source Lm:** 1.2m:4000lm@3000K; 1.2m:4500lm@4000K
- **LED Lifetime:** > 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K/3500K/4000K/5000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V-240V AC / 50Hz
- **Dimming:** ON-OFF/0-10V/DALI(Matching tests must be done with the project site systems)
- **Net Weight:** Approx. 2.06Kg, without packaging

Order Model

Model	Length (mm)	Power (W)	Driver	Beam	CCT	Finish
AOC2S	12 1145	30 30W	E ON-OFF	2 24°	30 3000K	WT White
			D 0-10V Dimming	3 36°	35 3500K	BK Black
			A DALI	4 45°	40 4000K	
					50 5000K	

Example: AOC2S-1230E340WT

LIGNE III- MODEL: AOC2S


Linear Luminaires

WAC ARCHITECTURAL


Project Name:

Type:

Product Image

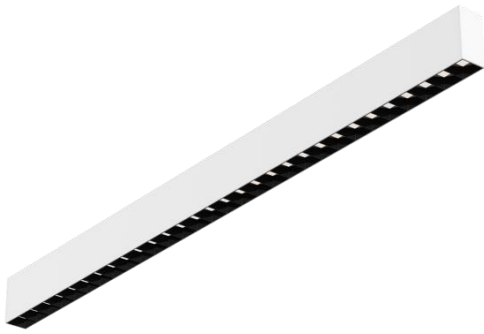

Line Drawing

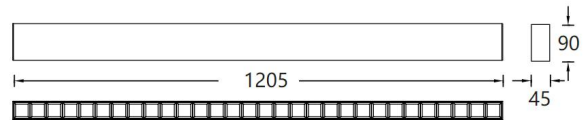

Product Description

The LIGNE III suspended linear luminaire features a sleek aluminum profile housing with a clean and modern appearance. Utilizing high-efficiency LED light sources, it offers excellent heat dissipation, energy-saving performance, and superior anti-glare control. The fixture supports end-to-end connection and customizable lengths, providing flexible design options for different lighting layouts. Ideal for commercial and office lighting applications, the LIGNE III delivers both functional illumination and refined aesthetics.

Product Features

- **Body Materials:** Aluminum die-casting lamp body
- **Optical System:** Lens+SUBROSA system
- **Finishes:** Electrostatic powder coating
- **Objection Direction:** /
- **Accessory/Bracket:** /
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C— 40°C

Product Specifications

- **Shading Angle:** 26°
- **LED Type:** High Power LED
- **Source Lm:** 1.2m:4000lm@3000K; 1.2m:4500lm@4000K
- **LED Lifetime:** > 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K/3500K/4000K/5000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V-240V AC / 50Hz
- **Dimming:** ON-OFF/0-10V/DALI(Matching tests must be done with the project site systems)
- **Net Weight:** Approx. 2.2Kg, without packaging

Order Model

Model	Length (mm)	Power (W)	Driver	Beam	CCT	Finish
AOC2S	12 1205	30 30W	E ON-OFF	6 60°	30 3000K	WT White
			D 0-10V Dimming	8 80°	35 3500K	BK Black
			A DALI		40 4000K	
					50 5000K	

Example: AOC2S-1230E840WT

LIGNE III- MODEL: AOC2S


Linear Luminaires

WAC ARCHITECTURAL


Project Name:

Type:

Product Image

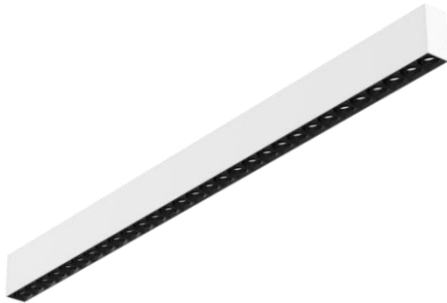

Line Drawing

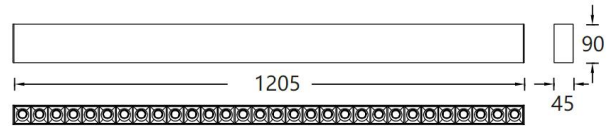

Product Description

The LIGNE III suspended linear luminaire features a sleek aluminum profile housing with a clean and modern appearance. Utilizing high-efficiency LED light sources, it offers excellent heat dissipation, energy-saving performance, and superior anti-glare control. The fixture supports end-to-end connection and customizable lengths, providing flexible design options for different lighting layouts. Ideal for commercial and office lighting applications, the LIGNE III delivers both functional illumination and refined aesthetics.

Product Features

- **Body Materials:** Aluminum die-casting lamp body
- **Optical System:** Lens+SUBROSA system
- **Finishes:** Electrostatic powder coating
- **Objection Direction:** /
- **Accessory/Bracket:** /
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C— 50°C

Product Specifications

- **Shading Angle:** 18°
- **LED Type:** High Power LED
- **Source Lm:** 1.2m:4000lm@3000K; 1.2m:4500lm@4000K
- **LED Lifetime:** > 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K/3500K/4000K/5000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V-240V AC / 50Hz
- **Dimming:** ON-OFF/0-10V/DALI(Matching tests must be done with the project site systems)
- **Net Weight:** Approx. 2.87Kg, without packaging

Order Model

Model	Length (mm)	Power (W)	Driver	Comment	Beam	CCT	Finish
AOC2S	12 1205	30 30W	E ON-OFF D 0-10V Dimming A DALI	A Adjustable	1 15°	30 3000K	WT White
					2 24°	35 3500K	BK Black
					3 36°	40 4000K	
						50 5000K	

Example: AOC2S-1230EA240WT