

LIGNE III- MODEL: AOR2ST

Linear Luminaires


WAC ARCHITECTURAL

Project Name:

Type:

Product Image

Line Drawing

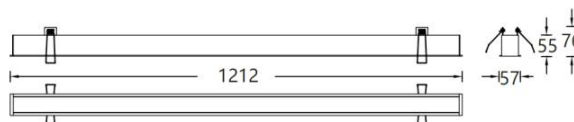

Product Description

LIGNE III is a trimless recessed linear luminaire with an extruded aluminium housing and a clean, minimalist appearance. Equipped with an LED light source, it offers effective thermal management, high efficiency and energy savings, and excellent glare control. It supports end-to-end continuous runs and can be supplied in custom lengths. Suitable for commercial and office lighting applications.

Product Features

- **Body Materials:** Aluminum die-casting lamp body
- **Optical System:** Anti-glare mask
- **Finishes:** Electrostatic powder coating
- **Objection Direction:** /
- **Accessory/Bracket:** /
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C— 40°C

Product Specifications

- **Shading Angle:** /
- **LED Type:** SMD LED
- **Source Lm:** 1.2m:4000lm@3000K;1.2m:4500lm@4000K
- **LED Lifetime:** > 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K/3500K/4000K/5000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V-240V AC / 50Hz
- **Dimming:** ON-OFF/0-10V/DALI(Matching tests must be done with the project site systems)
- **Net Weight:** Approx. 1.86Kg, without packaging

Order Model

Model	Comment	Length (mm)	Power (W)	Driver	Beam	CCT	Finish
AOR2S	T Trim	12 1212	30 30W	E On-Off	P (Frosted cover)	30 3000K	WT White
				D 0-10V Dimming	Y (Prismatic cover)	35 3500K	BK Black
				A DALI		40 4000K	
						50 5000K	

Example: AOR2ST-1230EY40WT

LIGNE III- MODEL: AOR2ST

Linear Luminaires

WAC ARCHITECTURAL


Project Name:

Type:

Product Image



Line Drawing

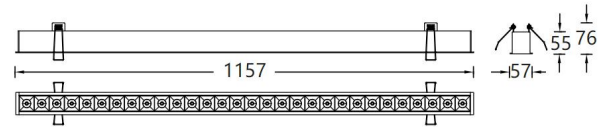

Product Description

LIGNE III is a trimless recessed linear luminaire with an extruded aluminium housing and a clean, minimalist appearance. Equipped with an LED light source, it offers effective thermal management, high efficiency and energy savings, and excellent glare control. It supports end-to-end continuous runs and can be supplied in custom lengths. Suitable for commercial and office lighting applications.

Product Features

- **Body Materials:** Aluminum die-casting lamp body
- **Optical System:** Lens+SUBROSA system
- **Finishes:** Electrostatic powder coating
- **Objection Direction:** /
- **Accessory/Bracket:** /
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C— 40°C

Product Specifications

- **Shading Angle:** 58°
- **LED Type:** High Power LED
- **Source Lm:** 1.2m:4000lm@3000K; 1.2m:4500lm@4000K
- **LED Lifetime:** > 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K/3500K/4000K/5000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V-240V AC / 50Hz
- **Dimming:** ON-OFF/0-10V/DALI(Matching tests must be done with the project site systems)
- **Net Weight:** Approx. 1.76Kg, without packaging

Order Model

Model	Comment	Length (mm)	Power (W)	Driver	Beam	CCT	Finish
AOR2S	T Trim	12 1157	30 30W	E On-Off	2 24°	30 3000K	WT White BK Black
				D 0-10V Dimming	3 36°	35 3500K	
				A DALI	4 45°	40 4000K	
					50 5000K		

Example: AOR2ST-1230E340WT

LIGNE III- MODEL: AOR2ST


Linear Luminaires

WAC ARCHITECTURAL


Project Name:

Type:

Product Image

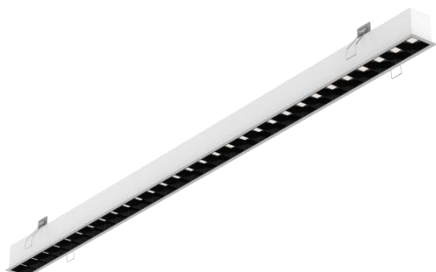

Line Drawing

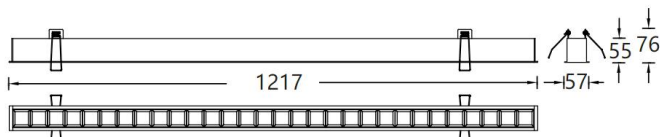

Product Description

LIGNE III is a trimless recessed linear luminaire with an extruded aluminium housing and a clean, minimalist appearance. Equipped with an LED light source, it offers effective thermal management, high efficiency and energy savings, and excellent glare control. It supports end-to-end continuous runs and can be supplied in custom lengths. Suitable for commercial and office lighting applications.

Product Features

- **Body Materials:** Aluminum die-casting lamp body
- **Optical System:** Lens+SUBROSA system
- **Finishes:** Electrostatic powder coating
- **Objection Direction:** /
- **Accessory/Bracket:** /
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C— 40°C

Product Specifications

- **Shading Angle:** 26°
- **LED Type:** High Power LED
- **Source Lm:** 1.2m:4000lm@3000K; 1.2m:4500lm@4000K
- **LED Lifetime:** > 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K/3500K/4000K/5000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V-240V AC / 50Hz
- **Dimming:** ON-OFF/0-10V/DALI(Matching tests must be done with the project site systems)
- **Net Weight:** Approx. 1.88Kg, without packaging

Order Model

Model	Comment	Length (mm)	Power (W)	Driver	Beam	CCT	Finish
AOR2S	T Trim	12 1217	30 30W	E On-Off	6 60°	30 3000K	WT White
				D 0-10V Dimming	8 80°	35 3500K	BK Black
				A DALI		40 4000K	
						50 5000K	

Example: AOR2ST-1230E840WT

LIGNE III- MODEL: AOR2ST


Linear Luminaires

WAC ARCHITECTURAL


Project Name:

Type:

Product Image

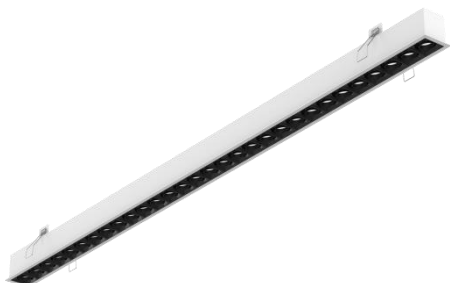

Line Drawing

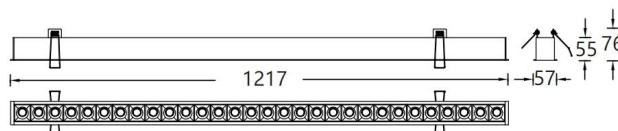

Product Description

LIGNE III is a trimless recessed linear luminaire with an extruded aluminium housing and a clean, minimalist appearance. Equipped with an LED light source, it offers effective thermal management, high efficiency and energy savings, and excellent glare control. It supports end-to-end continuous runs and can be supplied in custom lengths. Suitable for commercial and office lighting applications.

Product Features

- **Body Materials:** Aluminum die-casting lamp body
- **Optical System:** Lens+SUBROSA system
- **Finishes:** Electrostatic powder coating
- **Objection Direction:** /
- **Accessory/Bracket:** /
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C— 40°C

Product Specifications

- **Shading Angle:** 18°
- **LED Type:** High Power LED
- **Source Lm:** 1.2m:4000lm@3000K; 1.2m:4500lm@4000K
- **LED Lifetime:** > 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K/3500K/4000K/5000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V-240V AC / 50Hz
- **Dimming:** ON-OFF/0-10V/DALI(Matching tests must be done with the project site systems)
- **Net Weight:** Approx. 2.56Kg, without packaging

Order Model

Model	Comment	Length (mm)	Power (W)	Driver	Comment	Beam	CCT	Finish
AOR2S	T Trim	12 1217	30 30W	E On-Off	A Adjustable	1 15°	30 3000K	WT White
				D 0-10V Dimming		2 24°	35 3500K	BK Black
				A DALI		3 36°	40 4000K	
						50 5000K		

Example: AOR2ST-1230EA240WT