

# SILO PRO - MODEL: ATL15HLM

W Track Luminaires

WAC ARCHITECTURAL


PROJECT:

TYPE:

## Product Image



## Line Drawing

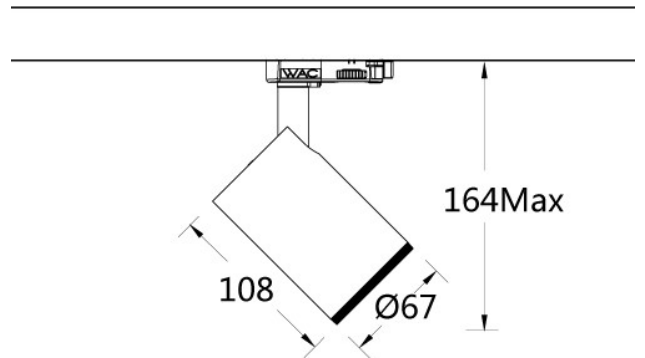

## Product Description

SILO Pro series LED track spotlights are suitable for the W three circuit track system, with a delicate design and no visible heat sink. The lamp body is made of die cast aluminum, with built-in flicker free driving appliances. It uses COB luminous modules, which have rich beam angle types and excellent color rendering. It can provide key lighting or environmental lighting, and is widely used in museums, art galleries, commercial spaces, hotels, retail and other places.

## Product Features

- Body Material: Aluminum alloy die-casting lamp body
- Optical System: Lens + Reflector
- Finish: Electrostatic powder coating, black (BK), white (WT)
- Adjustable Angle: Horizontal adjustment from 0° to 355°, Vertical 0°~90° adjustment
- Accessories: Up to three optical accessories can be added, and each type of accessory can only be added one at a time
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C
- Net Weight: 0.5Kg without packing

## Product Specifications

- LED Type: COB
- LED Power: 6W or 12W optional
- Source Lm: 2700K: 760lm (6W) / 1260lm (12W)  
3000K: 800lm (6W) / 1330lm (12W)  
4000K: 850lm (6W) / 1410lm (12W)  
5000K: 860lm (6W) / 1420lm (12W)
- LED Lifetime: >50000h-L70/B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K / 3000K / 4000K / 5000K, >Ra90
- SDCM: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: Built in knob dimming (dimming range 10~100%)  
1-10V dimming (Must conduct compatibility testing with the project site in advance)

## Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
ATL15H SILO Pro	LM06 COB 6W LM12 COB 12W	O On-board D 0-10V	1 13°	9 90	27 2700K	WT White BK Black
			2 24°		30 3000K	
			3 36°		40 4000K	
			5 55°		50 5000K	
ATL15H	LM12	O	2	9	30	WT

Example: ATL15HLM12-O2930WT

WAC Lighting  
www.waclighting.com (US)  
www.waclighting.net (International)

Headquarters  
44 Harbor Park Drive • Port Washington, NY  
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP  
TECHNOLOGY ILLUMINATED

# SILO PRO - MODEL: ATL15HLM


## W Track Luminaires

WAC ARCHITECTURAL

PROJECT:


TYPE:

### Accessory


Class I accessories	Weak mixed light plastic lenses <b>ALENS-TL15H-MIX</b> 	Strong mixed light plastic lenses <b>ALENS-TL15H-FIX</b> 	Stretch plastic lenses <b>ALENS-TL15H-WOF</b> 	Wash wall plastic lenses <b>ALENS-TL15H-WW</b> 
Class II accessories	Edging honeycomb <b>ALENS-16-HCM</b> 			
Class III accessories	Integrated all black plastic spotlight <b>ALENS-TL15H-SNOOT-B</b> Integrated all white plastic spotlight <b>ALENS-TL15H-SNOOT-W</b> 		Black four leaf sunshade <b>ATL-21-BD-SW</b> 	

Note: Up to three optical accessories can be added, and each type of accessory can only be added one at a time


### LIGHT DISTRIBUTION@3000K LUMINAIRE DATA




**MODEL:** ATL15HLM06-O1930  
**BEAM ANGLE:** 13°  
**POWER:** 8W  
**LUMENS:** 551lm  
**CBCP:** 5986cd  
**EFFICACY:** 69lm/W




**MODEL:** ATL15HLM06-O2930  
**BEAM ANGLE:** 24°  
**POWER:** 8W  
**LUMENS:** 656lm  
**CBCP:** 4564cd  
**EFFICACY:** 82lm/W




**MODEL:** ATL15HLM06-O3930  
**BEAM ANGLE:** 36°  
**POWER:** 8W  
**LUMENS:** 598lm  
**CBCP:** 1321cd  
**EFFICACY:** 75lm/W



**MODEL:** ATL15HLM06-O5930  
**BEAM ANGLE:** 55°  
**POWER:** 8W  
**LUMENS:** 453lm  
**CBCP:** 476cd  
**EFFICACY:** 57lm/W



**MODEL:** ATL15HLM12-O1930  
**BEAM ANGLE:** 13°  
**POWER:** 14W  
**LUMENS:** 871lm  
**CBCP:** 9466cd  
**EFFICACY:** 62lm/W



**MODEL:** ATL15HLM12-O2930  
**BEAM ANGLE:** 24°  
**POWER:** 14W  
**LUMENS:** 1037lm  
**CBCP:** 7216cd  
**EFFICACY:** 74lm/W


# SILO PRO - MODEL: ATL15HLM

W Track Luminaires


# WAC ARCHITECTURAL

PROJECT:

TYPE:



**MODEL:** ATL15HLM12-O3930  
**BEAM ANGLE:** 36°  
**POWER:** 14W  
**LUMENS:** 946lm  
**CBCP:** 2089cd  
**EFFICACY:** 68lm/W



**MODEL:** ATL15HLM12-O5930  
**BEAM ANGLE:** 55°  
**POWER:** 14W  
**LUMENS:** 716lm  
**CBCP:** 753cd  
**EFFICACY:** 51lm/W

# SILO PRO - MODEL: ATL16HLM

W Track Luminaires

WAC ARCHITECTURAL


PROJECT:

TYPE:

## Product Image



## Line Drawing

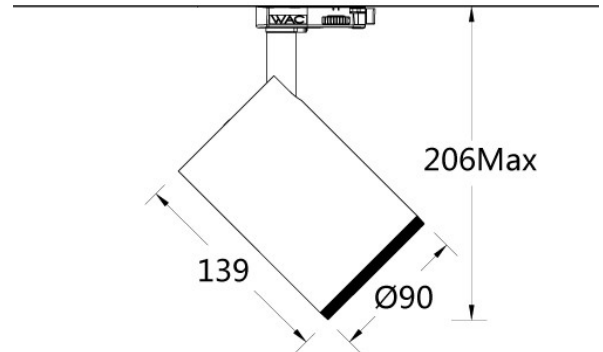

## Product Description

SILO Pro series LED track spotlights are suitable for the W three circuit track system, with a delicate design and no visible heat sink. The lamp body is made of die cast aluminum, with built-in flicker free driving appliances. It uses COB luminous modules, which have rich beam angle types and excellent color rendering. It can provide key lighting or environmental lighting, and is widely used in museums, art galleries, commercial spaces, hotels, retail and other places.

## Product Features

- Body Material: Aluminum alloy die-casting lamp body
- Optical System: Lens+ Reflector
- Finish: Electrostatic powder coating, black (BK), white (WT)
- Adjustable Angle: Horizontal adjustment from 0° to 355°, Vertical 0°~90° adjustment
- Accessories: Up to three optical accessories can be added, and each type of accessory can only be added one at a time
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C
- Net Weight: 1.0Kg without packing

## Product Specifications

- LED Type: COB
- LED Power: 18W or 26W optional
- Source Lm: 2700K: 2030lm (18W) / 2710lm (26W)  
3000K: 2120lm (18W) / 2830lm (26W)  
4000K: 2230lm (18W) / 2970lm (26W)  
5000K: 2330lm (18W) / 3100lm (26W)
- LED Lifetime: >50000h-L70/B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K / 3000K / 4000K / 5000K, >Ra90
- SDCM: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: Built in knob dimming (dimming range 10~100%)  
1-10V dimming (Must conduct compatibility testing with the project site in advance)

## Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
ATL16H SILO Pro	LM18 COB 18W LM26 COB 26W	O On-board A DALI D 0-10V	1 13°	9 90	27 2700K	WT White BK Black
			2 24°		30 3000K	
			3 36°		40 4000K	
			4 36°		50 5000K	
			5 55°			
ATL16H	LM18	O	2	9	30	WT

Example: ATL16HLM18-O2930WT

WAC Lighting  
www.waclighting.com (US)  
www.waclighting.net (International)

Headquarters  
44 Harbor Park Drive • Port Washington, NY  
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP  
TECHNOLOGY ILLUMINATED

WAC Lighting reserves the right to periodically design and update products. 2025-08-12

# SILO PRO - MODEL: ATL16HLM








## W Track Luminaires

WAC ARCHITECTURAL

PROJECT:







TYPE:

### Accessory

Class I accessories	Weak mixed light plastic lenses <b>ALENS-TL16H-MIX</b> 	Strong mixed light plastic lenses <b>ALENS-TL16H-FIX</b> 	Stretch plastic lenses <b>ALENS-TL16H-WOF</b> 	Wash wall plastic lenses <b>ALENS-TL16H-WW</b> 
Class II accessories	Edging honeycomb <b>ALENS-73-HCM</b> 			
Class III accessories	Integrated all black plastic spotlight <b>ALENS-TL16H-SNOOT-B</b> Integrated all white plastic spotlight <b>ALENS-TL16H-SNOOT-W</b> 		Black four leaf sunshade <b>ALENS-73-BD</b> 	

Note: Up to three optical accessories can be added, and each type of accessory can only be added one at a time

### LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

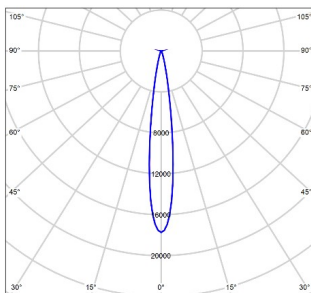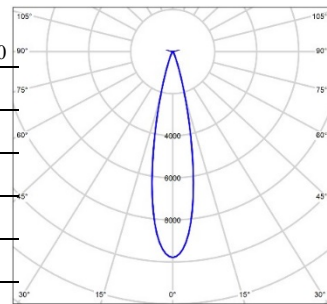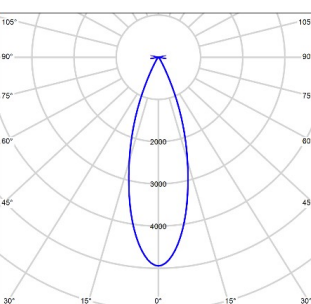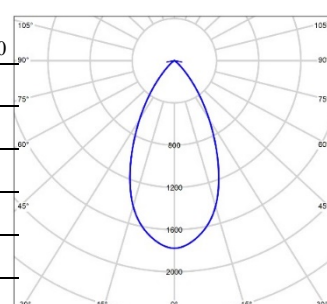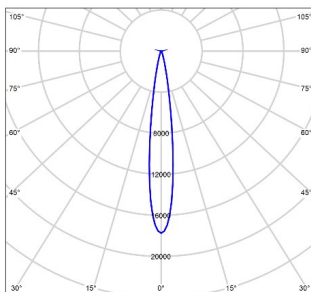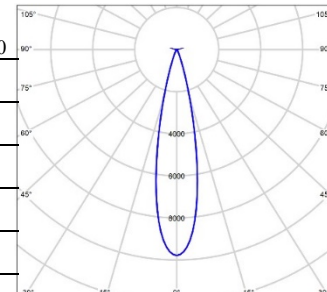	<p><b>MODEL:</b> ATL16HLM18-O1930</p> <p><b>BEAM ANGLE:</b> 13°</p> <p><b>POWER:</b> 21W</p> <p><b>LUMENS:</b> 1602lm</p> <p><b>CBCP:</b> 17728cd</p> <p><b>EFFICACY:</b> 76lm/W</p>		<p><b>MODEL:</b> ATL16HLM18-O2930</p> <p><b>BEAM ANGLE:</b> 24°</p> <p><b>POWER:</b> 21W</p> <p><b>LUMENS:</b> 1648lm</p> <p><b>CBCP:</b> 9782cd</p> <p><b>EFFICACY:</b> 78lm/W</p>
	<p><b>MODEL:</b> ATL16HLM18-O3930</p> <p><b>BEAM ANGLE:</b> 36°</p> <p><b>POWER:</b> 21W</p> <p><b>LUMENS:</b> 1637lm</p> <p><b>CBCP:</b> 4945cd</p> <p><b>EFFICACY:</b> 78lm/W</p>		<p><b>MODEL:</b> ATL16HLM18-O5930</p> <p><b>BEAM ANGLE:</b> 55°</p> <p><b>POWER:</b> 21W</p> <p><b>LUMENS:</b> 1421lm</p> <p><b>CBCP:</b> 1778cd</p> <p><b>EFFICACY:</b> 68lm/W</p>
	<p><b>MODEL:</b> ATL16HLM26-O1930</p> <p><b>BEAM ANGLE:</b> 13°</p> <p><b>POWER:</b> 30W</p> <p><b>LUMENS:</b> 2124lm</p> <p><b>CBCP:</b> 23504cd</p> <p><b>EFFICACY:</b> 71lm/W</p>		<p><b>MODEL:</b> ATL16HLM26-O2930</p> <p><b>BEAM ANGLE:</b> 24°</p> <p><b>POWER:</b> 30W</p> <p><b>LUMENS:</b> 2185lm</p> <p><b>CBCP:</b> 12969cd</p> <p><b>EFFICACY:</b> 73lm/W</p>

WAC Lighting  
www.waclighting.com (US)  
www.waclighting.net (International)

Headquarters  
44 Harbor Park Drive • Port Washington, NY  
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP  
TECHNOLOGY ILLUMINATED


# SILO PRO - MODEL: ATL16HLM

W Track Luminaires


# WAC ARCHITECTURAL

PROJECT:

TYPE:



**MODEL:** ATL16HLM26-O3930  
**BEAM ANGLE:** 36°  
**POWER:** 30W  
**LUMENS:** 2170lm  
**CBCP:** 6557cd  
**EFFICACY:** 72lm/W



**MODEL:** ATL16HLM26-O5930  
**BEAM ANGLE:** 55°  
**POWER:** 30W  
**LUMENS:** 1884lm  
**CBCP:** 2357cd  
**EFFICACY:** 63lm/W

# SILO PRO - MODEL: ATL17HLM

W Track Luminaires

WAC ARCHITECTURAL


PROJECT:

TYPE:

## Product Image



## Line Drawing

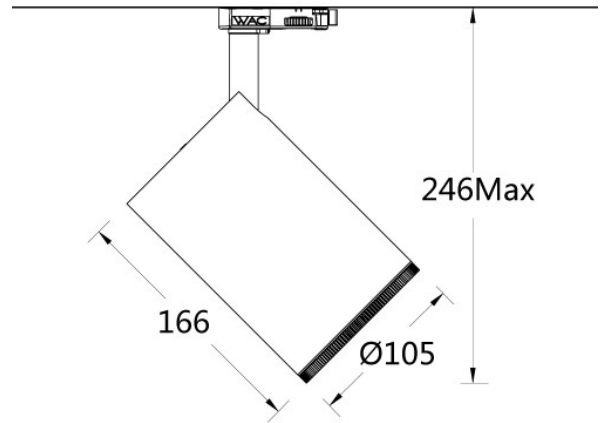

## Product Description

SILO Pro series LED track spotlights are suitable for the W three circuit track system, with a delicate design and no visible heat sink. The lamp body is made of die cast aluminum, with built-in flicker free driving appliances. It uses COB luminous modules, which have rich beam angle types and excellent color rendering. It can provide key lighting or environmental lighting, and is widely used in museums, art galleries, commercial spaces, hotels, retail and other places.

## Product Features

- Body Material: Aluminum alloy die-casting lamp body
- Optical System: Lens+ Reflector
- Finish: Electrostatic powder coating, black (BK), white (WT)
- Adjustable Angle: Horizontal adjustment from 0° to 355°, Vertical 0°~90° adjustment
- Accessories: Up to three optical accessories can be added, and each type of accessory can only be added one at a time
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C
- Net Weight: 1.4Kg without packing

## Product Specifications

- LED Type: COB
- LED Power: 34W
- Source Lm: 3390lm (2700K) / 3530lm (3000K) / 3710lm (4000K) / 3880lm (5000K)
- LED Lifetime: >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K / 3000K / 4000K / 5000K, >Ra90
- SDCM: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: Built in knob dimming (dimming range 10~100%)  
1-10V dimming (Must conduct compatibility testing with the project site in advance)

## Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
ATL17H SILO Pro	LM34 COB 34W	O On-board A DALI D 0-10V	1 13°	9 90	27 2700K	WT White BK Black
			2 24°		30 3000K	
			3 36°		40 4000K	
			5 55°		50 5000K	
			TL17H		LM34	

Example: ATL17HLM34-O2930WT

WAC Lighting  
www.waclighting.com (US)  
www.waclighting.net (International)

Headquarters  
44 Harbor Park Drive • Port Washington, NY  
Phone (516) 515.5000 • Fax (516) 515.5050

WAC GROUP  
TECHNOLOGY ILLUMINATED

# SILO PRO - MODEL: ATL17HLM







## W Track Luminaires

WAC ARCHITECTURAL

PROJECT:


TYPE:

### Accessory


Class I accessories	Weak mixed light plastic lenses <b>ALENS-TL17H-MIX</b> 	Strong mixed light plastic lenses <b>ALENS-TL17H-FIX</b> 	Stretch plastic lenses <b>ALENS-TL17H-WOF</b> 	Wash wall plastic lenses <b>ALENS-TL17H-WW</b> 
Class II accessories	Edging honeycomb <b>ALENS-25-HCL</b> 			
Class III accessories	Integrated all black plastic spotlight <b>ALENS-TL17H-SNOOT-B</b> Integrated all white plastic spotlight <b>ALENS-TL17H-SNOOT-W</b> 		Black four leaf sunshade <b>ATL-22-BD-SW</b> 	

Note: Up to three optical accessories can be added, and each type of accessory can only be added one at a time


### LIGHT DISTRIBUTION@3000K LUMINAIRE DATA




**MODEL:** ATL17HLM34-O1930  
**BEAM ANGLE:** 13°  
**POWER:** 38W  
**LUMENS:** 2600lm  
**CBCP:** 33432cd  
**EFFICACY:** 68lm/W



**MODEL:** ATL17HLM34-O2930  
**BEAM ANGLE:** 24°  
**POWER:** 38W  
**LUMENS:** 2578lm  
**CBCP:** 13443cd  
**EFFICACY:** 68lm/W



**MODEL:** ATL17HLM34-O3930  
**BEAM ANGLE:** 36°  
**POWER:** 38W  
**LUMENS:** 2629lm  
**CBCP:** 6154cd  
**EFFICACY:** 69lm/W



**MODEL:** ATL17HLM34-O5930  
**BEAM ANGLE:** 55°  
**POWER:** 38W  
**LUMENS:** 2462lm  
**CBCP:** 3104cd  
**EFFICACY:** 65lm/W