

FQ Color Changing

4" Adjustable


R4FRAT | R4FRAL | R4FSAT | R4FSAL

Fixture Type: _____


Project: _____

Catalog#: _____

Location: _____

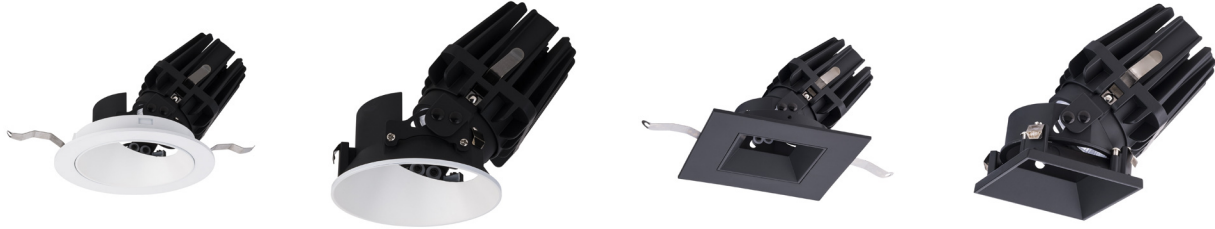

LINE DRAWING

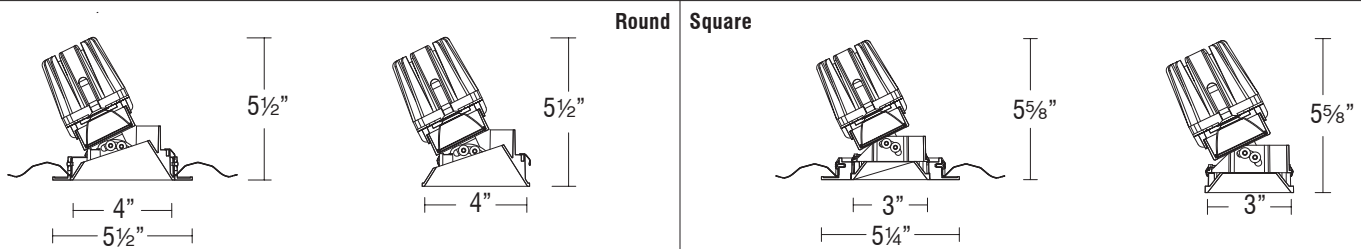

PRODUCT DESCRIPTION

Full Visible Spectrum color-tuning LEDs feature improved efficacy and lumens, as well as refined optical technology that offers human-centric recessed downlighting, catering to the needs of the modern technologist and integrator. Choose any color you can imagine, including the crispest white light or the softest pastel, with the ability to control gradients of saturated colors and a Tunable White CCT range from 1800-6500K.

SPECIFICATIONS

Construction: Durable die-cast self flanged aluminum construction

Mounting: Heavy gauge retention clips support trim firmly
 Ceiling cut out (Round): Trim $\varnothing 4\frac{3}{4}''$ \bigcirc
 Trimless $\varnothing 4\frac{3}{4}''$ \bigcirc
 Ceiling cut out (Square): Trim $4\frac{3}{4}'' \times 4\frac{3}{4}''$ \square
 Trimless $4\frac{3}{4}'' \times 4\frac{3}{4}''$ \square
 Accommodates $\frac{1}{2}''$ - $1''$ ceiling thickness

Light Source: High output 3-step Mac Adam Ellipse COB
 Rated life of 50,000 hours at L70

Input: Universal 120-277V AC, 50/60 Hz

Dimming: DMX512-A RDM

Maximum Delivered Intensity: Up to 2,393 cd (Square Narrow Flood 30°)

Maximum Delivered Output: Up to 1,084 lm (Square Narrow Flood 30°)

Operating Temperature: -4°F to 104°F (-20°C to 40°C)

Standards: ETL & cETL Wet location listed

Warranty: 5 year WAC Lighting guaranteed warranty

BEAM ANGLES



N - 27°



F - 42°



W - 55°

FINISHES



Black
BK



Dark Bronze
DB



Haze
HZ



White
WT



Haze White
HZWT

Model	Beam	Lumens	CBCP	Color Temp	CRI	
		Ref Output*	Ref Output*			
R4FRAT Round Trim	N 27°	Round	1065	CC	Color Changing 90+	
R4FRAL Round Trimless		Square	780			
R4FSAT Square Trim	F 42°	Round	980	Color Changing 90+		
R4FSAL Square Trimless		Square	685			
R4FRAT Round Trim	W 55°	Round	1030			Color Changing 90+
		Square	780			
R4FRAL Round Trimless	F 42°	Round	980		Color Changing 90+	
		Square	685			
R4FSAT Square Trim	W 55°	Round	1030	Color Changing 90+		
		Square	780			

Lumens and CBCP are reference values for a trim fixture set to 3000K Color Temperature. Refer to Multiplier Table in Performance Data to determine other outputs.

FQ Color Changing

4" Adjustable

R4FRAT | R4FRAL | R4FSAT | R4FSAL

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____

ORDERING INFORMATION

CONFIGURATION TABLE		
Model	Color Temperature & CRI	Reflector Finish
R4FRAT	CCX - Color Changing	BK - BLACK
R4FRAL		DB - DARK BRONZE
R4FSAT		HZ - HAZE
R4FSAL		HZWT - HAZE/WHITE
		WT - WHITE

R4FRAT-CCX-__

Example: R4FRAT-CCX-WT

ACCESSORIES	
LENS-16-HCM	<i>Honeycomb Louver</i>
LENS-16P-CRL-BK	<i>Cross Louver</i>
LENS-16AMB	<i>Amber Lens</i>
LENS-16RED	<i>Red Lens</i>
LENS-16BLU	<i>Blue Lens</i>
LENS-16GRN	<i>Green Lens</i>
LENS-16SPR	<i>Spread Lens</i>
LENS-16BEL	<i>Beam Elongating Lens</i>

ORDERING NOTES

1. The "Haze/White" finish is only available on trimmed fixtures (R4FRAT, R4FSAT).
2. The "Haze" finish is only available on trimless fixtures (R4FRAL, R4FSAL).
3. Flood beam (F - 42°) reflector comes pre-installed. All three reflector options (N-27°, F-42°, and W-55°) are included.

FQ Color Changing

4" Adjustable

R4FRAT | R4FRAL | R4FSAT | R4FSAL

Fixture Type: _____
 Project: _____
 Catalog#: _____
 Location: _____

ORDERING INFORMATION

Housings	Model	Power	Rating
New Construction Airtight Trimmed Round & Square	R4FBNT-CCX	15W	IC
New Construction Airtight Trimless Round	R4FRNL-CCX	15W	IC
New Construction Airtight Trimless Square	R4FSNL-CCX	15W	IC
New Construction Frame-In Trimmed Round & Square	R4FBFT-CCX	15W	Non-IC
New Construction Frame-In Trimless Round	R4FRFL-CCX	15W	Non-IC
New Construction Frame-In Trimless Square	R4FSFL-CCX	15W	Non-IC
New Construction Frame-In Trimmed Round & Square	R4FBFT-CCX	15W	Non-IC
New Construction Frame-In Trimless Round	R4FRFL-CCX	15W	Non-IC
New Construction Frame-In Trimless Square	R4FSFL-CCX	15W	Non-IC

R4F__-CCX
 Example: R4FBNT-CCX

FQ Color Changing

4" Adjustable

R4FRAT | R4FRAL | R4FSAT | R4FSAL

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____


PERFORMANCE DATA

Polar Candela Distribution Charts

Samples shown from a trimmed fixture set to 3000K.


ROUND

Narrow Flood Beam: 27° Beam

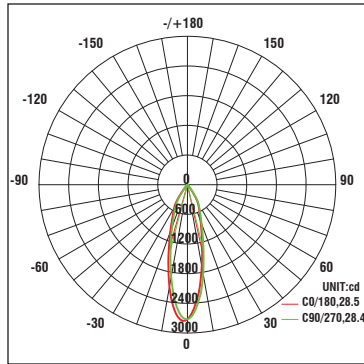


SQUARE


Narrow Flood Beam: 27° Beam

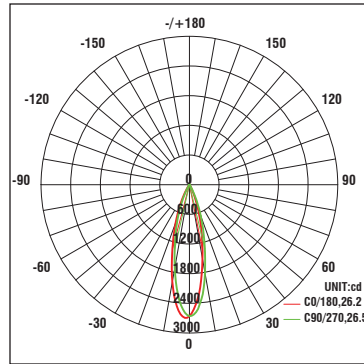


Flood Beam: 42° Beam

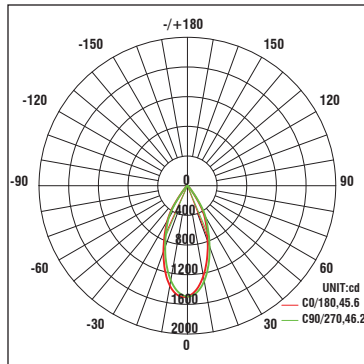


Flood Beam: 42° Beam

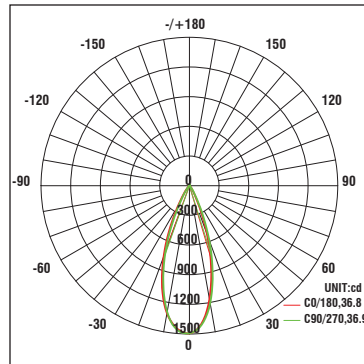

Wide Flood Beam: 55° Beam

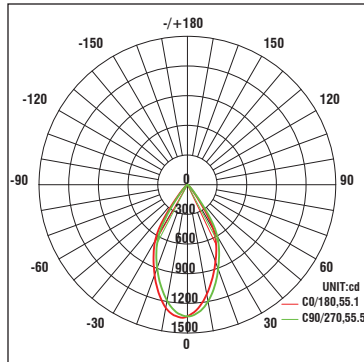

Wide Flood Beam: 55° Beam

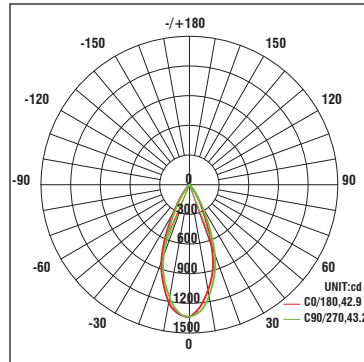

FQ Color Changing

4" Adjustable

R4FRAT | R4FRAL | R4FSAT | R4FSAL

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____

PERFORMANCE DATA

Unified Glare Rating (UGR) Table

UGR values shown are calculated using trimmed fixtures set to 3000K.

Round Fixture	Angle	UGR Range
Narrow Flood	27°	≤ 16
Flood	42°	≤ 18
Wide Flood	55°	≤ 19

Square Fixture	Angle	UGR Range
Narrow Flood	27°	≤ 10
Flood	42°	≤ 12
Wide Flood	55°	≤ 14

Lumens and CBCP Multiplier Table

Use the below table to determine lumens and CBCP values for the combinations of power, color temperature, and CRI values.

LUMENS AND CBCP MULTIPLIER								
Housing Wattage	Color Temperature							
	1800K	2200K	2700K	3000K	3500K	4000K	5000K	6500K
15W	0.70	0.86	0.97	1.00	1.04	1.08	1.12	1.10