


PROJECT:

LIGHT POSITION NUMBER:

**Product Image**



**Line Drawing**

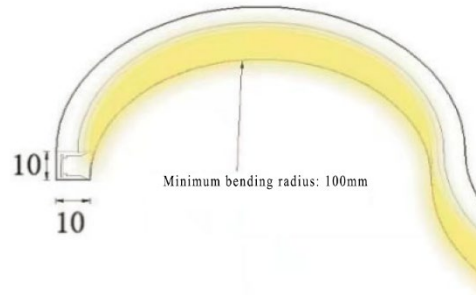

**Product Description**

10×10 mm Straight-Curved Neon Light Strips, ensure continuous and uniform light emission with no light spots. Rated IP20, it is widely used in hotels, villas, and commercial spaces for interior contour lighting and creating decorative effects.

**Product Features**

- **Body Material:** Lamp body extrusion silicone, high quality  
FPCB lamp board Silicone
- **Optical System:** Microstructure
- **Accessories:** See accessories table for details
- **Certification:** CQC
- **IP Rating:** IP20
- **Insulation Level:** Class III
- **Operating Temperature:** -20°C~40°C

**Product Specifications**

- **LED Type:** SMD
- **Lamp Power:** 690 lm@6W/m, 1150 lm@10W/m
- **LED Lifetime:** >36000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CRI:** 2700K, 3000K, 3500K, 4000K, 5000K/Ra90
- **Input:** 24V DC
- **SDCM:** 3 SDCM
- **Minimum bending radius:** 100mm
- **Dimming:** ON-OFF(Entire 1 phase control)
- **Net Weight:** 0.3Kg/m without packing

**Order Model**

Model	LED	Length	Size	Dimming	CCT	Power Feed Type	IP	Finish
AFLSH	06 6W/m	10 1m	D	E ON-OFF	27 2700K	S cable exit	2 IP20	WT
H-Series Straight- Curved Neon Light Strip	10 10W/m	20 2m	10*10mm	Whole stage control	30 3000K	B cable exit F cable exit		White
		30 3m			35 3500K			
		40 4m			40 4000K			
		50 5m			50 5000K			

Example: AFLSH-0610DE30S2WT

\* Length is available in 0.1-meter increments. Example model: AFLSH-0615DE30S2WT ("15" denotes 1.5 meters)


**NEON - MODEL: AFLSH**  
 Linear Luminaires

WAC ARCHITECTURAL

PROJECT:

LIGHT POSITION NUMBER:

**Accessories**

Model	Description	Image
AFLSH-AAC	H Series 10×10 mm Special Mounting Brackets *Default 1-meter length; 3 mounting brackets included	
AFLSH-ACH	H Series 10×10 mm Dedicated Mounting Rail, Length 965 mm *Optional; must be ordered separately	