


CUBE


5" Ultra Narrow Double Wall Mount

DC-WD05-U

Fixture Type: _____
 Project: _____
 Catalog#: _____
 Location: _____

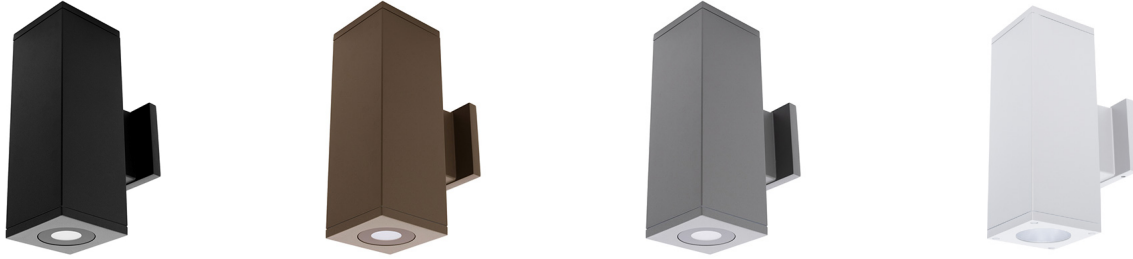

LINE DRAWING

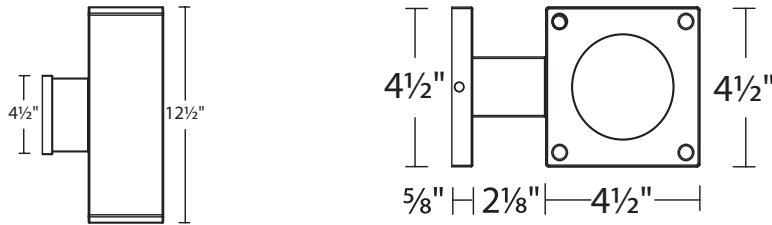

PRODUCT DESCRIPTION

Precise engineering using the latest energy efficient LED technology with a built-in ultra narrow beam precision optics. An appealing cubical profile perfect for accent lighting.

BEAM ANGLES



SPECIFICATIONS

Construction:	Durable die-cast aluminum construction
Mounting:	Wall mounted
Light Source:	High output 3-step Mac Adam Ellipse COB Rated life of 80,000 hours at L70
Input:	Universal 120-277V AC 50/60 Hz
Dimming:	Electronic low voltage (ELV) : 100 - 10% 0-10V: 100 - 20%
Maximum Delivered Intensity:	Up to 1462x2 cd (Ultra Narrow 6°, 4000K, CRI 85)
Maximum Delivered Output:	Up to 155x2 lm (Ultra Narrow 6°, 4000K, CRI 85)
Operating Temperature:	-40°F to 104°F (-40°C to 40°C)

FINISHES



Beam	Beam Angle	Color Temp	CRI	Reference Lumens	Output x2 ¹ CBCP	Light Direction
U Ultra Narrow	6°	827	2700K	85	125	1182
		830	3000K	85	145	1363
		835	3500K	85	150	1411
		840	4000K	85	155	1462
						B Towards

Standards: IP65 rated, ETL & cETL wet location listed
Warranty: 5 year WAC Lighting guaranteed warranty

CUBE

5" Ultra Narrow Double Wall Mount

DC-WD05-U

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____

ORDERING INFORMATION

CONFIGURATION TABLE				
Model & Size	Beam	Color Temperature & CRI	Light Direction	Housing Finish
DC-WD05 (22W)	U - 6°	827 - 2700K - 85	B - Towards	BK - BLACK
		830 - 3000K - 85		BZ - BRONZE
		835 - 3500K - 85		GH - GRAPHITE
		840 - 4000K - 85		WT - WHITE

DC-WD05-U ___ - ___

Example: DC-WD05-U27B-BK