

## CUBE


### 6" Pendant

DC-PD06 | DC-PD0622

Fixture Type: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Catalog#: \_\_\_\_\_  
 Location: \_\_\_\_\_



#### LINE DRAWING

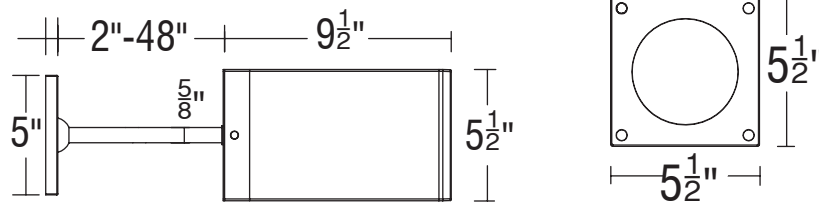

#### PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cubical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

#### SPECIFICATIONS

**Construction:** Durable die-cast aluminum construction  
**Mounting:** Ceiling mounted pendant with 45° swivel canopy

**Light Source:** High output 3-step Mac Adam Ellipse COB  
 Rated life of 60,000 hours at L70

**Input:** Universal 120-277V AC 50/60 Hz

**Dimming:** Electronic low voltage (ELV) : 100 - 5%  
 0-10V: 100 - 1%

**Maximum Delivered Intensity:** Up to 24490 cd (Spot 16°, 4000K, CRI 85)

**Maximum Delivered Output:** Up to 3675 lm (Flood 38°, 4000K, CRI 85)

**Operating Temperature:** -13°F to 122°F (-25°C to 50°C)

**Standards:** IP65 rated, ETL & cETL wet location listed  
 Energy Star® 2.2 rated, Title 24 JA8-2016 Compliant

**Warranty:** 5 year WAC Lighting guaranteed warranty

#### BEAM ANGLES



S - 16°



N - 28°



F - 38°

#### FINISHES



Black  
BK



Bronze  
BZ



Graphite  
GH



White  
WT

Beam Angle	Color Temp	CRI	Reference Lumens	Output <sup>1</sup> CBCP	Efficacy (Lm/W)	
S Spot 16°	<b>927</b>	2700K	90	2820	18842	81
	<b>827</b>	2700K	85	3385	22608	97
	<b>930</b>	3000K	90	2925	19543	84
	<b>830</b>	3000K	85	3535	23632	101
	<b>835</b>	3500K	85	3630	24255	104
	<b>840</b>	4000K	85	3665	24490	105
N Narrow 28°	<b>927</b>	2700K	90	2800	7992	80
	<b>827</b>	2700K	85	3360	9589	96
	<b>930</b>	3000K	90	2900	8290	83
	<b>830</b>	3000K	85	3510	10024	100
	<b>835</b>	3500K	85	3600	10288	103
	<b>840</b>	4000K	85	3635	10388	104
F Flood 38°	<b>927</b>	2700K	90	2825	5451	81
	<b>827</b>	2700K	85	3390	6540	97
	<b>930</b>	3000K	90	2930	5654	84
	<b>830</b>	3000K	85	3545	6836	101
	<b>835</b>	3500K	85	3640	7017	104
	<b>840</b>	4000K	85	3675	7085	105

Reference output shows 35W output aimed straight up or down. Multiply by 0.7 to determine output for 22W combinations.



## CUBE

### 6" Pendant

DC-PD06 | DC-PD0622

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Catalog#: \_\_\_\_\_

Location: \_\_\_\_\_

### ORDERING INFORMATION

CONFIGURATION TABLE			
Model & Power	Beam	Color Temperature & CRI	Housing Finish
<b>DC-PD06</b> (35W) <b>DC-PD0622</b> (22W)	<b>S</b> - 16°	<b>827</b> - 2700K - 85	<b>BK</b> - BLACK
	<b>N</b> - 28°	<b>830</b> - 3000K - 85	<b>BZ</b> - BRONZE
	<b>F</b> - 38°	<b>835</b> - 3500K - 85	<b>GH</b> - GRAPHITE
		<b>840</b> - 4000K - 85	<b>WT</b> - WHITE
		<b>927</b> - 2700K - 90	
		<b>930</b> - 3000K - 90	
Accessories			
<b>DS-PDX24</b> - 24" Extension Rod			

**DC-PD06-\_\_\_\_-\_\_**

Example: DC-PD06-N927-BK

## CUBE 6" Pendant

DC-PD06 | DC-PD0622


Fixture Type: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Catalog#: \_\_\_\_\_  
 Location: \_\_\_\_\_

### PERFORMANCE DATA


#### Polar Candela Distribution Charts

Samples shown with a 35W fixture set to 3000K and 90 CRI.


##### Spot Beam: 16° Beam

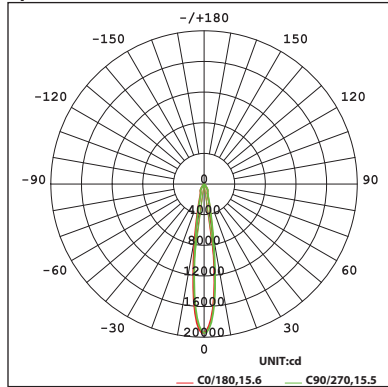

##### Narrow Flood Beam: 28° Beam

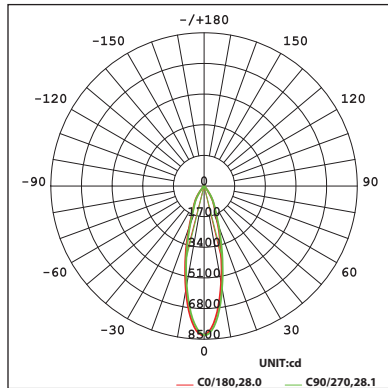

##### Flood Beam: 38° Beam

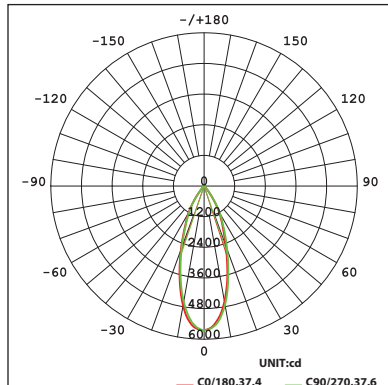

#### Unified Glare Rating (UGR) Table

UGR values shown are calculated for the Spot Beam (16°) optic at 3000K and 90 CRI. General performance of other beam angles shown below.

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	5.1	5.8	5.3	6.0	6.2	4.7	5.4	4.9	5.6	5.8	
3H	5.4	6.1	5.6	6.3	6.5	5.1	5.7	5.3	5.9	6.1	
4H	5.6	6.2	5.9	6.5	6.7	5.3	5.9	5.6	6.2	6.4	
6H	5.8	6.4	6.1	6.7	6.9	5.5	6.1	5.8	6.4	6.6	
8H	5.9	6.5	6.2	6.7	7.0	5.5	6.1	5.8	6.4	6.7	
12H	6.0	6.5	6.3	6.8	7.1	5.6	6.1	5.9	6.4	6.7	
4H	2H	5.1	5.7	5.4	6.0	6.2	4.7	5.4	5.0	5.6	5.8
	3H	5.5	6.1	5.8	6.4	6.7	5.2	5.8	5.5	6.1	6.4
	4H	5.8	6.4	6.2	6.7	7.0	5.6	6.1	5.9	6.4	6.7
	6H	6.2	6.7	6.6	7.0	7.3	5.9	6.4	6.3	6.7	7.1
	8H	6.3	6.8	6.7	7.1	7.5	6.0	6.5	6.4	6.8	7.2
	12H	6.5	6.9	6.9	7.3	7.7	6.1	6.5	6.5	6.9	7.3
8H	4H	5.9	6.4	6.3	6.7	7.1	5.7	6.1	6.1	6.5	6.9
	6H	6.4	6.8	6.8	7.2	7.6	6.2	6.5	6.6	6.9	7.4
	8H	6.6	7.0	7.1	7.4	7.8	6.4	6.7	6.8	7.1	7.6
	12H	6.9	7.2	7.4	7.6	8.1	6.5	6.8	7.0	7.3	7.7
12H	4H	5.9	6.3	6.3	6.7	7.1	5.7	6.1	6.1	6.5	6.9
	6H	6.4	6.7	6.9	7.2	7.6	6.2	6.5	6.7	7.0	7.4
	8H	6.7	7.0	7.2	7.4	7.9	6.5	6.7	6.9	7.2	7.7

Beam	Angle	UGR Range
Spot	16°	≤ 8
Narrow Flood	28°	≤ 8
Flood	38°	≤ 9