


Mere High Power COB

WTK-38 | WHK-38 | MO-N38 | MO-R38

Fixture Type: _____
 Project: _____
 Catalog#: _____
 Location: _____



LINE DRAWING

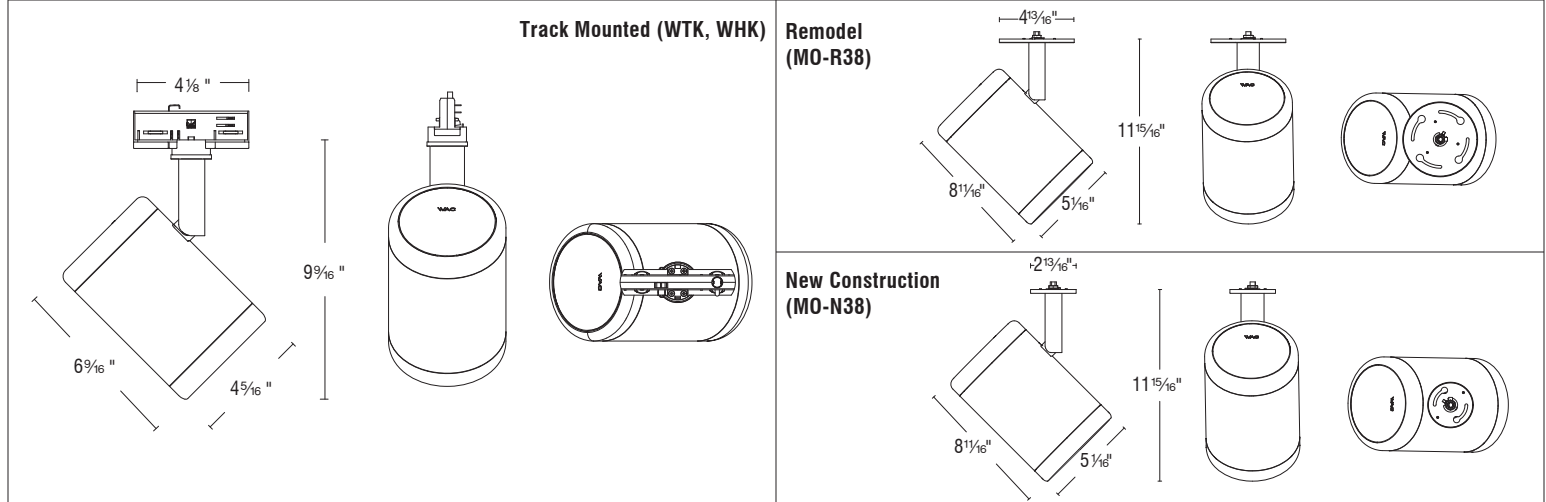

PRODUCT DESCRIPTION

Smarter, more flexible, and more versatile MERE track lighting. MERE offers a wide range of optical configurations, color temperatures, accessories, and even a DIY intelligent control module. The innovative 0-10V and knob dimming design makes on-site system commissioning and individual adjustment more flexible and convenient.

SPECIFICATIONS

Construction:	Injection molded polycarbonate low glare trim
Mounting:	Track mounted (WTK, WHK); ceiling mounted (MO) Ceiling cut out: $\varnothing 4\frac{1}{2}"$ Accommodates 1/2" - 2" ceiling thickness
Light Source:	High output 3-step Mac Adam Ellipse COB Rated life of 50,000 hours at L70
Input:	Universal 120-277V AC, 50/60 Hz
Power:	54W
Dimming:	ELV, TRIAC, and 0-10V: 100 - 1%
Operating Temperature:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL & cETL
Warranty:	5 year WAC Lighting guaranteed warranty

BEAM ANGLES



FINISHES



Model	Beam	Lumens Ref Output*	CBCP	Color Temp	CRI
WTK-38 WHK-38 $\varnothing 4.33"$ MO-N38 $\varnothing 110\text{mm}$ MO-R38	V 8°	945	2960	927 - 2700K 930 - 3000K 935 - 3500K 940 - 4000K	90
	S 12°	960	2470		
	N 24°	815	785		
	M 36°	960	2470		
	W 50°	815	785		

Lumens and CBCP are reference values for fixtures set to 3000K Color Temperature. Refer to Multiplier Table in Performance Data to determine other outputs.



Mere High Power COB

WTK-38 | WHK-38 | MO-N38 | MO-R38

Fixture Type: _____
 Project: _____
 Catalog#: _____
 Location: _____

ORDERING INFORMATION

CONFIGURATION TABLE			
Model & Power	Beam Angle	Color Temperature & CRI	Housing Finish
WTK-38 (120V)	V - Very Narrow 8°	927 - 2700K - 90	BK - BLACK
WHK-38 (277V)	S - Spot 12°	930 - 3000K - 90	WT - WHITE
MO-N38 (120-277V)	N - Narrow Flood 24°	935 - 3500K - 90	
MO-R38 (120-277V)	M - Medium Flood 36°	940 - 4000K - 90	
	W - Wide Flood 50°		

W_K-38S-_____

Example: WTK-38S-S930WT

MO- 38S-_____

Example: MO-N38S-M930BK

ACCESSORIES	
LENS-38S-WWWT	TL38 WALL - WASHING LENS
LENS-38S-EEWT	TL38 STRECHTED LENS
LENS-38S-SSWT	TL38 SMALL DIFFUSION LENS
LENS-38S-MMWT	TL38 MEDIUM DIFFUSION LENS
LENS-38S-LLWT	TL38 HEAVY DIFFUSION LENS
LENS-38S-SQWT	TL38 SQUARE DIFFUSION LENS
LENS-38S-CSBK	TL38 12D DIFFUSION LENS MODULE BLACK
LENS-38S-CNBK	TL38 24D DIFFUSION LENS MODULE BLACK
LENS-38S-CMBK	TL38 36D DIFFUSION LENS MODULE BLACK
LENS-38S-CWBK	TL38 50D DIFFUSION LENS MODULE BLACK
LENS-38S-SNOOT-B	TL38 CONDENSER BLACK
LENS-38S-SNOOT-W	TL38 CONDENSER WHITE
LENS-38S-HCM	TL38 HONEYCOMB MESH
LENS-38S-BD-BK	TL38 LIGHT SHIELDING PLATE BLACK
LENS-38S-BD-WT	TL38 LIGHT SHIELDING PLATE WHITE
LENS-38S-HSBK	TL38 HISTORICAL SENSE FILTER
LENS-38S-RGBK	TL38 RECOGNITION FILTER
LENS-38S-PFBK	TL38 PREFERENCE FILTER

ORDERING NOTES

- The WTK-38 fixture is 120V and the WHK-38 fixture is 277V. Both fixtures are track mounted.
- The MO-N38 fixture is a ceiling mounted monopoint fixture for New Construction installations. The MO-R38 fixture is a ceiling mounted monopoint fixture for Remodel installations.

Mere High Power COB

WTK-38 | WHK-38 | MO-N38 | MO-R38


Fixture Type: _____
 Project: _____
 Catalog#: _____
 Location: _____

PERFORMANCE DATA


Polar Candela Distribution Charts

Samples shown with a 54W fixture with a White finish set to 3000K.


Very Narrow Beam: 8° Beam

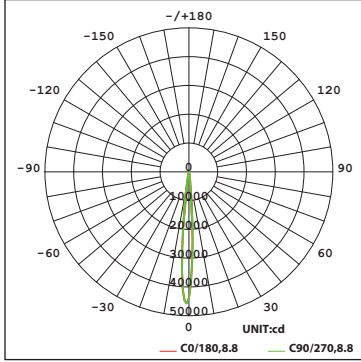


Medium Flood Beam: 36° Beam

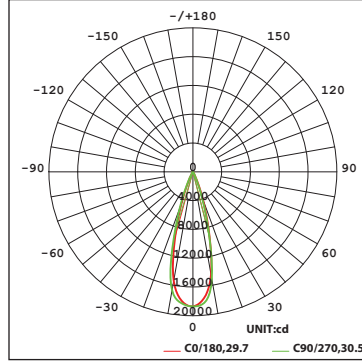


Spot Beam: 12° Beam

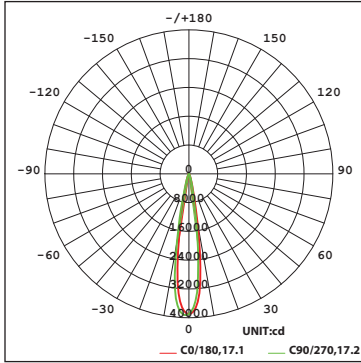

Wide Flood Beam: 50° Beam

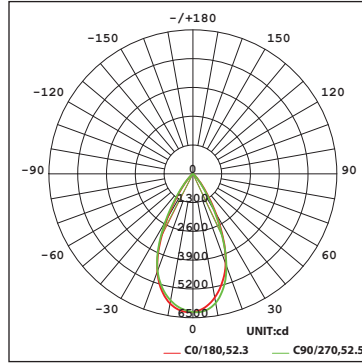

Narrow Flood Beam: 24° Beam

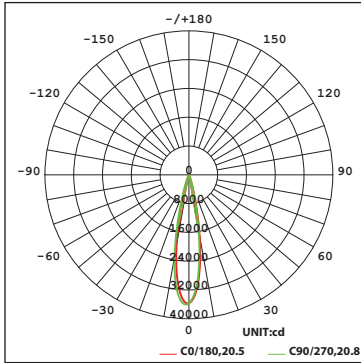

Mere High Power COB

WTK-38 | WHK-38 | MO-N38 | MO-R38

Fixture Type: _____
 Project: _____
 Catalog#: _____
 Location: _____

PERFORMANCE DATA

Unified Glare Rating (UGR) Table

UGR values shown are calculated for a fixture with a Very Narrow Beam (8°) optic at 3000K and 90 CRI. General performance of other beam angles shown below.

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	5.9	6.4	6.1	6.5	6.6	5.8	6.3	6.0	6.4	6.5	
3H	5.7	6.2	6.0	6.4	6.6	5.7	6.1	5.9	6.3	6.5	
4H	5.7	6.1	5.9	6.3	6.5	5.6	6.0	5.8	6.2	6.4	
6H	5.6	6.0	5.9	6.3	6.5	5.5	5.9	5.8	6.2	6.4	
8H	5.6	6.0	5.8	6.2	6.5	5.5	5.9	5.8	6.1	6.4	
12H	5.5	5.9	5.8	6.2	6.4	5.4	5.8	5.7	6.1	6.4	
4H	2H	5.7	6.1	5.9	6.3	6.5	5.6	6.0	5.8	6.2	6.4
3H	5.5	5.9	5.8	6.2	6.4	5.4	5.8	5.7	6.1	6.4	
4H	5.4	5.8	5.8	6.1	6.4	5.4	5.7	5.7	6.0	6.3	
6H	5.3	5.7	5.7	6.0	6.3	5.3	5.6	5.6	5.9	6.3	
8H	5.3	5.6	5.7	6.0	6.3	5.2	5.5	5.6	5.9	6.2	
12H	5.3	5.5	5.7	5.9	6.3	5.2	5.5	5.6	5.8	6.2	
8H	4H	5.3	5.6	5.7	5.9	6.3	5.2	5.5	5.6	5.9	6.2
6H	5.2	5.4	5.6	5.8	6.2	5.1	5.4	5.5	5.8	6.2	
8H	5.1	5.4	5.6	5.8	6.2	5.1	5.3	5.5	5.7	6.1	
12H	5.1	5.3	5.6	5.7	6.2	5.0	5.2	5.5	5.7	6.1	
12H	4H	5.2	5.5	5.6	5.9	6.3	5.1	5.4	5.5	5.8	6.2
6H	5.1	5.4	5.6	5.8	6.2	5.0	5.3	5.5	5.7	6.1	
8H	5.1	5.3	5.5	5.7	6.2	5.0	5.2	5.5	5.6	6.1	

Round Fixture	Angle	UGR Range
Very Narrow	8°	≤7
Spot	12°	≤13
Narrow Flood	24°	≤7
Medium Flood	36°	≤10
Wide Flood	50°	≤21

Lumens and CBCP Multiplier Table

Use the below table to determine lumens and CBCP values for the combinations of power, color temperature, and CRI values.

Color Temperature			
2700K	3000K	3500K	4000K
0.93	1.00	1.07	1.14