


Panther Static White PAL2 (2.2W)

Fixture Type: _____
 Project: _____
 Catalog#: _____
 Location: _____



LINE DRAWING

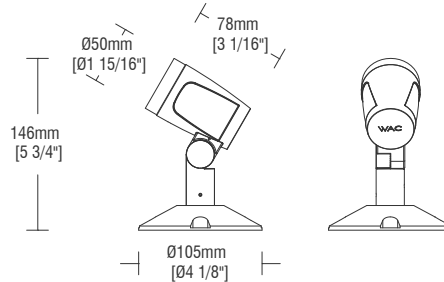

PRODUCT DESCRIPTION

Utilizing the latest LED technology, the PANTHER series of luminaire features a low-profile design and high optical performance, available in a variety of sizes. The series supports vertical or horizontal mounting with precise adjustments in the direction of rotation. Recommended for architectural façade lighting or landscape spot lighting.

SPECIFICATIONS

Construction:	Durable die-cast aluminum construction
Mounting:	Outdoor installation
Light Source:	High output 3-step Mac Adam Ellipse Rated life of 50,000 hours at L70
Input:	Universal 120-277V AC, 50/60 Hz
Power:	2.2W
Controls:	0-10V, DMX512-A with RDM
Maximum Delivered Intensity:	Up to 5,194 (Very Narrow 7°, 4000K)
Maximum Delivered Output:	Up to 178 lm (Spot 13°, 4000K)
Operating Temperature:	-4°F to 122°F (-20°C to 50°C)
Standards:	ETL & cETL Wet location listed
Warranty:	5 year WAC Lighting guaranteed warranty

BEAM ANGLES



FINISHES



Model	Beam	Lumens	CBCP	Efficacy	Color Temp
		Ref Output*	Ref Output*	(lm/W)	
PAL2 Ø50mm Ø2"	V 7°	157	4854	51	927-2700K
	S 13°	166	2113	51	930-3000K
	M 30°	159	521	51	935-3500K
	F 40°	144	297	46	940-4000K

*Lumens and CBCP are reference values for 3000K Color Temperature. Refer to Multiplier Table in Performance Data to determine other outputs.

Panther

Static White

PAL2 (2.2W)

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____

ORDERING INFORMATION

CONFIGURATION TABLE				
Model & Power	Dimming	Beam Angle	Color Temperature & CRI	Housing Finish
PAL2 (2.2W)	L - 0-10V D - DMX512-A	V - Very Narrow 7°	927 - 2700K - 90	BK - BLACK
		S - Spot 13°	930 - 3000K - 90	
		M - Medium Flood 30°	940 - 4000K - 90	
		F - Flood 40°		

PAL2-03 - ____ -BK

Example: PAL2-03D-M930-BK

ACCESSORIES	
PAL2-SHR-BK	<i>Panther 2" Shroud - Black</i>
PAL2-SNOOT-BK	<i>Panther 2" Snoot - Black</i>
AL-TMS-BK	<i>Tree Mount Bracket - Small</i>
AL-TML-BK	<i>Tree Mount Bracket - Large</i>
AL-TRM-BK	<i>Tree Ring Mount</i>
M6000-STAKE	<i>Ground Stake</i>
AL-PM-BK	<i>Pole Mount Bracket</i>
AL-PS-3-BK	<i>3" Pole Sleeve</i>
AL-PCM-S-BK	<i>Pole Clamp - Single</i>
AL-PCM-AD-BK	<i>Pole Clamp Adjustable - Double</i>


Fixture Type: _____
 Project: _____
 Catalog#: _____
 Location: _____

PERFORMANCE DATA


Polar Candela Distribution Charts

Samples shown from a fixture set to 4000K.


V - Very Narrow Beam 7°

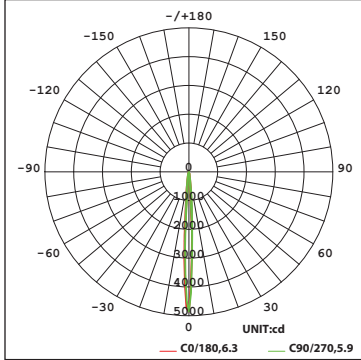


F - Flood Beam 40°

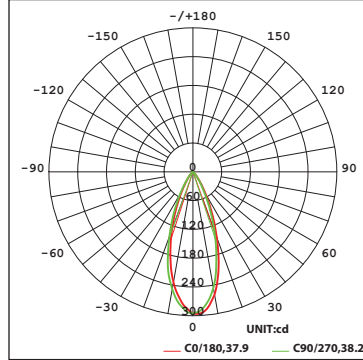

S - Spot Beam 13°

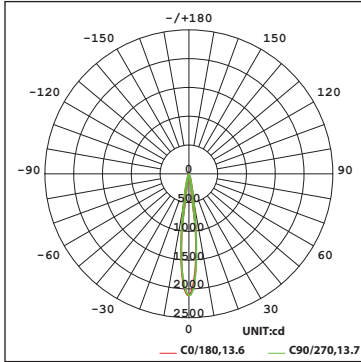

M - Medium Flood Beam 30°

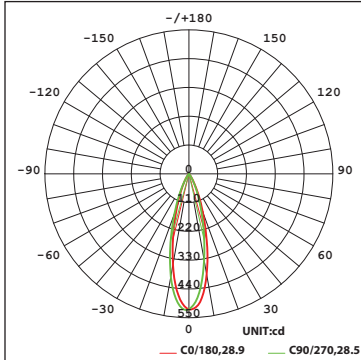

Panther Static White PAL2 (2.2W)

Fixture Type: _____
 Project: _____
 Catalog#: _____
 Location: _____

PERFORMANCE DATA

Unified Glare Rating (UGR) Table

Samples shown from a fixture with a Very Narrow 7° beam set to 3000K. General performance of other beam angles shown below.

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	-10.7	-10.2	-10.5	-10.0	-9.9	-10.8	-10.3	-10.6	-10.1	-10.0	
3H	-10.8	-10.3	-10.6	-10.1	-10.0	-10.9	-10.4	-10.7	-10.2	-10.0	
4H	-10.9	-10.4	-10.6	-10.2	-10.0	-11.0	-10.5	-10.7	-10.3	-10.1	
6H	-11.0	-10.5	-10.7	-10.3	-10.1	-11.1	-10.6	-10.8	-10.4	-10.1	
8H	-11.0	-10.6	-10.7	-10.3	-10.1	-11.1	-10.7	-10.8	-10.4	-10.2	
12H	-11.1	-10.6	-10.8	-10.4	-10.1	-11.1	-10.7	-10.8	-10.5	-10.2	
4H	2H	-10.9	-10.4	-10.6	-10.2	-10.0	-11.0	-10.5	-10.7	-10.3	-10.1
3H	-11.0	-10.6	-10.7	-10.3	-10.1	-11.1	-10.7	-10.8	-10.4	-10.2	
4H	-11.1	-10.7	-10.8	-10.4	-10.1	-11.2	-10.8	-10.9	-10.5	-10.2	
6H	-11.2	-10.9	-10.8	-10.5	-10.2	-11.3	-10.9	-10.9	-10.6	-10.3	
8H	-11.3	-10.9	-10.9	-10.6	-10.2	-11.4	-11.0	-11.0	-10.7	-10.3	
12H	-11.3	-11.0	-10.9	-10.6	-10.3	-11.4	-11.1	-11.0	-10.7	-10.4	
8H	4H	-11.3	-10.9	-10.9	-10.6	-10.2	-11.3	-11.0	-11.0	-10.7	-10.3
6H	-11.4	-11.1	-11.0	-10.7	-10.3	-11.5	-11.2	-11.0	-10.8	-10.4	
8H	-11.4	-11.2	-11.0	-10.8	-10.3	-11.5	-11.3	-11.1	-10.9	-10.4	
12H	-11.5	-11.3	-11.0	-10.9	-10.4	-11.6	-11.4	-11.1	-10.9	-10.5	
12H	4H	-11.3	-11.0	-10.9	-10.6	-10.3	-11.4	-11.1	-11.0	-10.7	-10.4
6H	-11.4	-11.2	-11.0	-10.8	-10.3	-11.5	-11.3	-11.1	-10.9	-10.4	
8H	-11.5	-11.3	-11.0	-10.9	-10.4	-11.6	-11.4	-11.1	-10.9	-10.5	

Fixture	Angle	UGR Range
Very Narrow	7°	≤ 0
Spot	13°	≤ 0
Medium Flood	30°	≤ 0
Flood	40°	≤ 4

Lumens and CBCP Multiplier Table

Use the below table to determine lumens and CBCP values for the combinations of power, color temperature, and CRI values.

Color Temperature				
2700K	3000K	3500K	4000K	5000K
0.96	1.00	1.04	1.07	1.12