

Multi Stealth

Wall Wash

R1GWT | R1GWL

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____



PRODUCT DESCRIPTION

Multi Stealth Recessed features a quiet aperture for a nearly glare-free environment. Its linear multi-cell form factor features a 1.5" aperture, with availability in up to 5 lengths. This series offers a downlight with 40° visual cutoff, an adjustable option with 35° bidirectional tilt, and a wall washer with specialized optics for even wall illumination. Trimmed and trimless options allow flexibility when integrating into building architecture.

SPECIFICATIONS

Construction: Extruded aluminum construction with die-cast end caps

Mounting: Heavy gauge retention clips support trim firmly. Trimless body is supported by tool-less push mechanism. Safety cabling standard from housing. Ceiling cutout information found in Performance Data. Accommodates ½" - 1½" ceiling thickness.

Light Source: High output 3-step Mac Adam Ellipse SMD LED
Rated life of 50,000 hours at L70

Input: Universal 120-277V AC, 50/60 Hz

Dimming: 0-10V: 100-1%
Electronic Low Voltage (ELV), TRIAC: 100-5%

Maximum Delivered Output: Up to 2,290 lm (12 Cell, Asym, 4000K, CRI 90)

Standards: ETL & cETL Damp location listed, Energy Star® 2.1
Title 24 JA8 Compliant

Warranty: 5 year WAC Lighting guaranteed warranty

BEAM ANGLES



FINISHES



Black Black
BKBK



Black White
BKWT



White Black
WTBK



White White
WTWT

Model	Size	Beam	*Lumens	*CBCP
R1GWT Trim R1GWL Trimless	04 4 Cell	A Asym	670	N/A
	08 8 Cell	A Asym	1390	N/A
	12 12 Cell	A Asym	2140	N/A

*Lumens and CBCP are reference values for 3000K Color Temperature and 90 CRI. Refer to Multiplier Table in Performance Data to determine other outputs. Line drawings and measurements for each size and trim are available in Performance Data.

Multi Stealth

Wall Wash

R1GWT | R1GWL

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____

ORDERING INFORMATION

CONFIGURATION TABLE					
Model & Power	Size	Beam	Color Temperature & CRI	Reflector Finish	Trim Finish
R1GWL (Trimless)	04 - 4 CELL	A: Asym	927 - 2700K - 90	BK - BLACK WT - WHITE	BK - BLACK WT - WHITE
R1GWT (Trim)	08 - 8 CELL		930 - 3000K - 90		
	12 - 12 CELL		935 - 3500K - 90		
			940 - 4000K - 90		

R1GW ___ - ___ - ___ Example: R1GWL08-N940-BK
R1GWT08-N940-BKBK

HOUSINGS (Required)					
Model	Trim	Size	Wattage	Rating	
New Construction Airtight	R1GN	T <i>Trim</i>	04 4 CELL	14W	IC
		L <i>Trimless</i>	08 8 CELL	27W	IC
			12 12 CELL	38W	Non-IC
Remodel Trim Fixtures Only	R1GR	T <i>Trim</i>	04 4 CELL	14W	Non-IC
			08 8 CELL	27W	Non-IC
			12 12 CELL	38W	Non-IC

ORDERING NOTES

- Trim fixtures (R1GWT) must be ordered with a trim finish.
- Remodel housings (R1GRT) are only compatible with trim fixtures (R1GWT).

Multi Stealth

Wall Wash

R1GWT | R1GWL

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____

PERFORMANCE DATA

Size	Trim
04 4 Cells	R1GWT
08 8 Cells	
12 12 Cells	

Multi Stealth

Wall Wash

R1GWT | R1GWL

Fixture Type: _____

Project: _____

Catalog#: _____


Location: _____

PERFORMANCE DATA


Polar Candela Distribution Charts

Samples shown with a Black finished fixture set to 3000K and 90 CRI.


4 Cells: Asymmetric Beam (Asym)

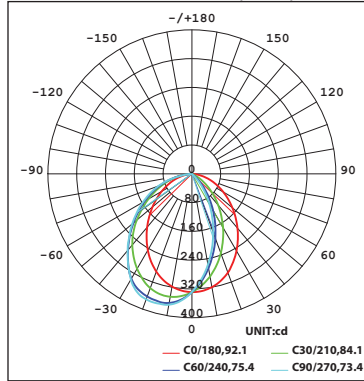

8 Cells: Asymmetric Beam (Asym)

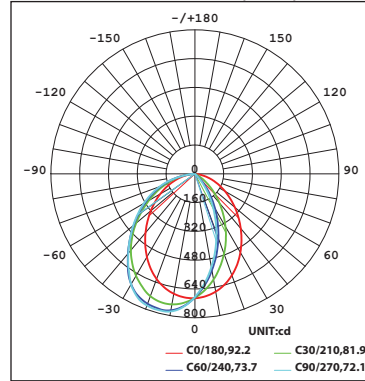

12 Cells: Asymmetric Beam (Asym)

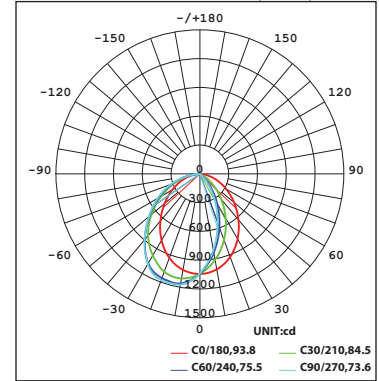

Lumens and CBCP Multiplier Table

Use the below table to determine lumens and CBCP values for the combinations of power, color temperature, and CRI values.

Color Temperature			
927	930	935	940
0.95	1.00	1.05	1.07

Multi Stealth

Wall Wash

R1GWT | R1GWL

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____

PERFORMANCE DATA

Unified Glare Rating (UGR) Table

UGR values shown are calculated for a 4 cell sized (R1GWL04) Black finished fixture set to 3000K and 90 CRI. General performance of other beam angles shown below.

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.2	18.6	17.5	18.8	19.0	18.5	19.9	18.7	20.1	20.3
3H	18.5	19.7	18.8	20.0	20.2	20.0	21.3	20.3	21.5	21.7
4H	18.9	20.1	19.2	20.4	20.6	20.6	21.8	20.9	22.1	22.3
6H	19.2	20.3	19.5	20.6	20.9	20.9	22.1	21.2	22.3	22.6
8H	19.2	20.3	19.6	20.6	20.9	20.9	22.0	21.3	22.3	22.6
12H	19.2	20.3	19.6	20.6	20.9	20.9	22.0	21.2	22.2	22.5
4H	18.0	19.2	18.3	19.5	19.7	19.0	20.2	19.3	20.4	20.7
3H	19.5	20.5	19.8	20.8	21.1	20.7	21.8	21.0	22.1	22.4
4H	20.1	21.1	20.5	21.4	21.7	21.4	22.4	21.8	22.7	23.0
6H	20.5	21.4	20.9	21.7	22.1	21.8	22.7	22.2	23.0	23.4
8H	20.6	21.4	21.0	21.8	22.1	21.9	22.7	22.3	23.1	23.4
12H	20.6	21.3	21.0	21.7	22.1	21.9	22.6	22.3	23.0	23.4
8H	20.4	21.2	20.9	21.6	22.0	21.6	22.4	22.0	22.8	23.2
6H	21.0	21.7	21.5	22.1	22.5	22.2	22.8	22.6	23.2	23.6
8H	21.2	21.8	21.7	22.2	22.7	22.3	22.8	22.7	23.3	23.7
12H	21.3	21.8	21.8	22.2	22.7	22.3	22.8	22.7	23.2	23.7
12H	20.5	21.2	20.9	21.6	22.0	21.6	22.4	22.0	22.7	23.1
6H	21.1	21.7	21.5	22.1	22.5	22.2	22.8	22.6	23.2	23.6
8H	21.3	21.8	21.8	22.3	22.7	22.3	22.8	22.8	23.3	23.7

Beam	Size	UGR Range
A - Asym	04 4 CELL	≤24
	08 8 CELL	≤27
	12 12 CELL	≤28