

Volta


Static White - 2" Wall Wash

R2RWT | R2SWT

Fixture Type: _____
 Project: _____
 Catalog#: _____
 Location: _____



LINE DRAWING

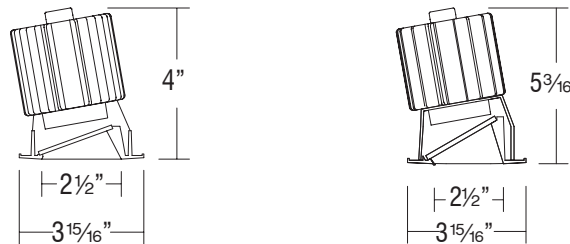

PRODUCT DESCRIPTION

Volta LED downlight series represents an innovation in design and technology for architectural lighting. This high lumen and adaptable family of fixtures with a comprehensive set of round and square fittings, affords a sustainable solution for commercial, corporate, and upscale residential applications. Wall Wash Volta fixtures are equipped with an innovative bidirectional spread lens.

SPECIFICATIONS

Construction: Durable die-cast self flanged aluminum construction
Mounting: Heavy gauge retention clips support trim firmly
 Ceiling cut out (Round): Trim \varnothing 3 ⁹/₁₆"
 Trimless \varnothing 4 ¹/₄"
 Ceiling cut out (Square): Trim 3 ⁹/₁₆" x 3 ⁹/₁₆"
 Trimless 4 ¹/₄" x 4 ¹/₄"
 Accommodates 1/2" - 1" ceiling thickness

Light Source: High output 3-step Mac Adam Ellipse COB
 Rated life of 50,000 hours at L70
Input: Universal 120-277V AC, 50/60 Hz
Dimming: 0-10V: 100-0%
 Electronic Low Voltage (ELV): 100-5%
 Lutron Hi-Lume 1% Ecosystem Fade-to-Black option

Maximum Delivered Intensity: Up to 717 cd (Round Asymmetric, 4000K, CRI 85)
Maximum Delivered Output: Up to 1,091 lm (Round Asymmetric, 4000K, CRI 85)

Standards: ETL & cETL Wet location listed
Warranty: 5 year WAC Lighting guaranteed warranty

BEAM ANGLES



FINISHES



Model	Beam		Lumens Ref Output*	CBCP	Color Temp	CRI	
R2RWT R2SWT	Round Square	A Asym	Round Square	1020 940	670 655	827 - 2700K	85
						830 - 3000K	85
						835 - 3500K	85
						840 - 4000K	85
						927 - 2700K	90
						930 - 3000K	90

Lumens and CBCP are reference values for 3000K Color Temperature and 85 CRI with 22 housing. Refer to Multiplier Table in Performance Data to determine other outputs.

wacarchitectural.com | WAC Architectural, a WAC Group brand.

WAC Group Headquarters
 44 Harbor Park Drive
 Port Washington, NY 11050

WAC Lighting
 Phone (800) 526.2588
 Fax (800) 526.2585



APR 2026 | P. 1 of 4

WAC GROUP

Volta

Static White - 2" Wall Wash

R2RWT | R2SWT

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____

ORDERING INFORMATION

CONFIGURATION TABLE				
Model & Power	Beam	Color Temperature & CRI	Reflector Finish	Trim Finish
R2RWT	A - Asym	827 - 2700K - 85	BK - BLACK	WT - WHITE
R2SWT		830 - 3000K - 85	CB - COPPER	
		835 - 3500K - 85	HZ - HAZE	
		840 - 4000K - 85	WT - WHITE	
		927 - 2700K - 90		
		930 - 3000K - 90		

R2RWT-____-__ Example: R2RWT-N840-WT

HOUSINGS (Required)										
Model	Trim	Power	S	N,F,W	Rating	Driver	Emergency Backup			
New Construction Airtight	R2RN (Round)	T <i>Trim</i>	15	<i>10W</i>	<i>15W</i>	<i>IC</i>	DEFAULT	<i>ELV, 0-10V</i>		EM <i>Optional</i>
	R2SN (Square)	L <i>Trimless</i>	22	<i>15W</i>	<i>22W</i>	<i>IC</i>	L1	<i>Lutron Hi-Lume 1%</i>		
New Construction Airtight Chicago Plenum	R2RC (Round)	T <i>Trim</i>	15	<i>10W</i>	<i>15W</i>	<i>IC</i>	DEFAULT	<i>ELV, 0-10V</i>		EM <i>Optional</i>
	R2SC (Square)	L <i>Trimless</i>	22	<i>15W</i>	<i>22W</i>	<i>IC</i>	L1	<i>Lutron Hi-Lume 1%</i>		
Remodel Round or Square	R2BR	T <i>Trim</i>	15	<i>10W</i>	<i>15W</i>	<i>Non-IC</i>	DEFAULT	<i>ELV, 0-10V</i>		N/A
			22	<i>15W</i>	<i>22W</i>	<i>Non-IC</i>				
Remodel	R2RR (Round) R2SR (Square)	L <i>Trimless</i>	15	<i>15W</i>	<i>15W</i>	<i>Non-IC</i>	DEFAULT	<i>ELV, 0-10V</i>		N/A
			22	<i>22W</i>	<i>22W</i>	<i>Non-IC</i>				

CEILING ADAPTERS

R2R-ADP1 *Round - ½" to 1" ceiling thickness*

R2S-ADP1 *Square - ½" to 1" ceiling thickness*

ORDERING NOTES

- The "White" trim finish is only available with the reflector finishes "Black" and "Haze".
- The "A - Asym" beam angle is available in 15W and 22W.

Volta

Static White - 2" Wall Wash

R2RWT | R2SWT

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____


PERFORMANCE DATA

Polar Candela Distribution Charts

Samples shown with a 22W fixture set to 3000K and 90 CRI.


ROUND

Asymmetric Beam

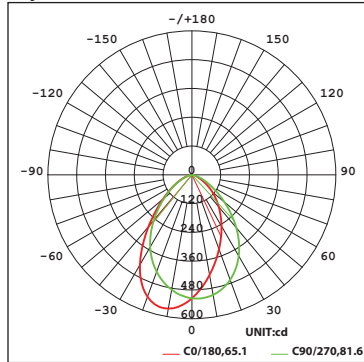

SQUARE

Asymmetric Beam

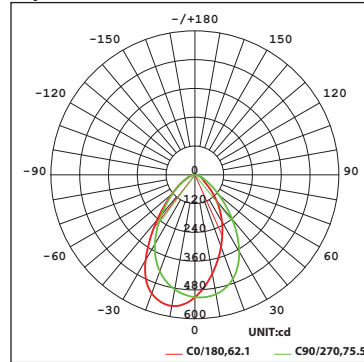

Volta

Static White - 2" Wall Wash

R2RWT | R2SWT

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____

PERFORMANCE DATA

Unified Glare Rating (UGR) Table

UGR values shown are calculated for a Round Trim fixture with a 22W Asymmetric Beam (Asym) optic at 3000K and 90 CRI. General performance of other beam angles shown below.

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	19.5	20.8	19.7	20.9	21.1	19.3	20.6	19.6	20.8	21.0	
3H	19.9	21.1	20.2	21.3	21.6	19.7	20.9	20.0	21.1	21.4	
4H	20.0	21.1	20.3	21.4	21.6	19.8	20.9	20.1	21.1	21.4	
6H	20.0	21.1	20.3	21.3	21.6	19.8	20.8	20.1	21.1	21.3	
8H	20.0	21.0	20.3	21.2	21.5	19.7	20.7	20.1	21.0	21.3	
12H	19.9	20.9	20.3	21.2	21.5	19.7	20.7	20.0	20.9	21.2	
4H	2H	19.7	20.8	20.0	21.0	21.3	19.6	20.7	19.9	20.9	21.1
3H	20.3	21.2	20.6	21.5	21.8	20.1	21.0	20.4	21.3	21.6	
4H	20.4	21.3	20.8	21.6	21.9	20.2	21.0	20.5	21.4	21.7	
6H	20.4	21.2	20.8	21.5	21.9	20.2	20.9	20.6	21.3	21.7	
8H	20.4	21.1	20.8	21.5	21.8	20.2	20.9	20.6	21.2	21.6	
12H	20.3	21.0	20.8	21.4	21.8	20.1	20.8	20.5	21.2	21.6	
8H	4H	20.4	21.1	20.8	21.5	21.8	20.2	20.9	20.6	21.2	21.6
6H	20.4	21.0	20.8	21.4	21.8	20.2	20.8	20.6	21.2	21.6	
8H	20.4	20.9	20.8	21.3	21.8	20.2	20.7	20.6	21.1	21.6	
12H	20.4	20.8	20.8	21.2	21.7	20.2	20.6	20.6	21.0	21.5	
12H	4H	20.3	21.0	20.8	21.4	21.8	20.1	20.8	20.5	21.1	21.5
6H	20.4	20.9	20.8	21.3	21.8	20.2	20.7	20.6	21.1	21.5	
8H	20.4	20.8	20.8	21.2	21.7	20.2	20.6	20.6	21.0	21.5	

Round Fixture	Angle	UGR Range
Asym	-	≤22

Square Fixture	Angle	UGR Range
Asym	-	≤22

Lumens and CBCP Multiplier Table

Use the below table to determine lumens and CBCP values for the combinations of power, color temperature, and CRI values.

Multiplier		TRIM					
		827	927	830	930	835	840
HOUSING	22	0.95	0.81	1.00	0.86	1.05	1.07
	15	0.66	0.56	0.69	0.59	0.72	0.74