

FQ Color Changing


4" Wall Wash

R4FRWT | R4FRWL | R4FSWT | R4FSWL

Fixture Type: _____
 Project: _____
 Catalog#: _____
 Location: _____



LINE DRAWING

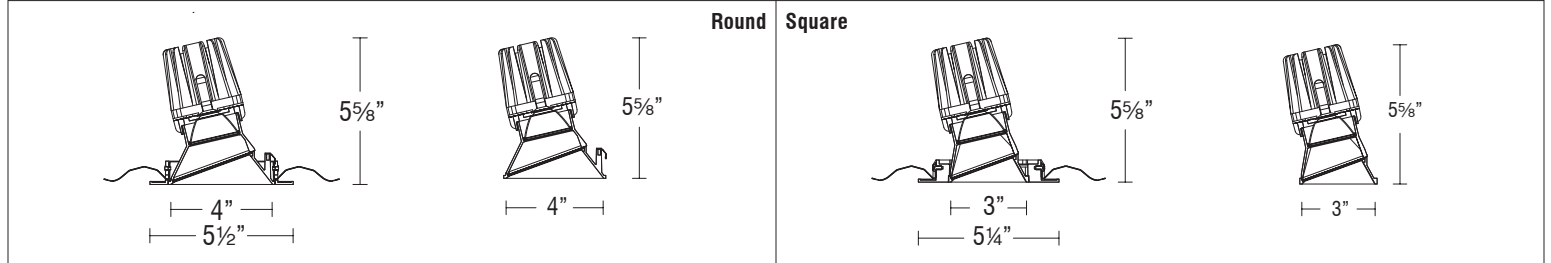

PRODUCT DESCRIPTION

Full Visible Spectrum color-tuning LEDs feature improved efficacy and lumens, as well as refined optical technology that offers human-centric recessed downlighting, catering to the needs of the modern technologist and integrator. Choose any color you can imagine, including the crispest white light or the softest pastel, with the ability to control gradients of saturated colors and a Tunable White CCT range from 1800-6500K.


SPECIFICATIONS

Construction:	Durable die-cast self flanged aluminum construction
Mounting:	Heavy gauge retention clips support trim firmly Ceiling cut out (Round): Trim $\varnothing 4\frac{3}{4}"$ Trimless $\varnothing 4\frac{3}{4}"$ Ceiling cut out (Square): Trim $4\frac{3}{4}" \times 4\frac{3}{4}"$ Trimless $4\frac{3}{4}" \times 4\frac{3}{4}"$ Accommodates 1/2" - 1" ceiling thickness
Light Source:	High output 3-step Mac Adam Ellipse COB Rated life of 50,000 hours at L70
Input:	Universal 120-277V AC, 50/60 Hz
Dimming:	DMX512-A RDM
Maximum Delivered Output:	Up to 1,355 lm (Round Asymmetric, 5000K)
Operating Temperature:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL & cETL Wet location listed
Warranty:	5 year WAC Lighting guaranteed warranty

BEAM ANGLES



FINISHES

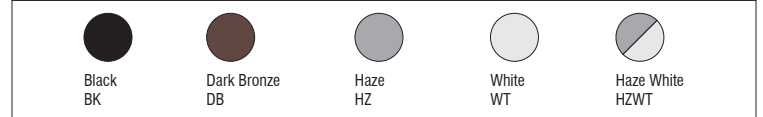

Model	Beam	Lumens	CBCP	Color Temp	CRI
		Ref Output*			
R4FRWT Round Trim	A Asym	Round	1210	N/A	CCX Color Changing 90+
R4FRWL Round Trimless					
R4FSWT Square Trim		Square	1080	N/A	
R4FSWL Square Trimless					

Lumens and CBCP are reference values for a trim fixture set to 3000K Color Temperature. Refer to Multiplier Table in Performance Data to determine other outputs.

FQ Color Changing

4" Wall Wash

R4FRWT | R4FRWL | R4FSWT | R4FSWL

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____

ORDERING INFORMATION

CONFIGURATION TABLE		
Model	Color Temperature & CRI	Reflector Finish
R4FRWT	CCX - Color Changing	BK - BLACK
R4FRWL		DB - DARK BRONZE
R4FSWT		HZ - HAZE
R4FSWL		HZWT - HAZE/WHITE
		WT - WHITE

R4FRWT-CCX-__

Example: R4FRWT-CCX-WT

ACCESSORIES	
LENS-16-HCM	<i>Honeycomb Louver</i>
LENS-16P-CRL-BK	<i>Cross Louver</i>
LENS-16AMB	<i>Amber Lens</i>
LENS-16RED	<i>Red Lens</i>
LENS-16BLU	<i>Blue Lens</i>
LENS-16GRN	<i>Green Lens</i>
LENS-16SPR	<i>Spread Lens</i>
LENS-16BEL	<i>Beam Elongating Lens</i>

ORDERING NOTES

1. The "Haze/White" finish is only available on trimmed fixtures (R4FRWT, R4FSWT).
2. The "Haze" finish is only available on trimless fixtures (R4FRWL, R4FSWL)

FQ Color Changing

4" Wall Wash

R4FRWT | R4FRWL | R4FSWT | R4FSWL

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____

ORDERING INFORMATION

Housings	Model	Power	Rating
New Construction Airtight Trimmed Round & Square	R4FBNT-CCX	15W	IC
New Construction Airtight Trimless Round	R4FRNL-CCX	15W	IC
New Construction Airtight Trimless Square	R4FSNL-CCX	15W	IC
New Construction Frame-In Trimmed Round & Square	R4FBFT-CCX	15W	Non-IC
New Construction Frame-In Trimless Round	R4FRFL-CCX	15W	Non-IC
New Construction Frame-In Trimless Square	R4FSFL-CCX	15W	Non-IC
New Construction Frame-In Trimmed Round & Square	R4FBFT-CCX	15W	Non-IC
New Construction Frame-In Trimless Round	R4FRFL-CCX	15W	Non-IC
New Construction Frame-In Trimless Square	R4FSFL-CC	15W	Non-IC

R4F__-CCX
Example: R4FBNT-CCX

FQ Color Changing

4" Wall Wash

R4FRWT | R4FRWL | R4FSWT | R4FSWL

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____

FEATURES

<p>Optics:</p> <ul style="list-style-type: none"> • High lumen output across the full RGB color gamut and CCT range of 1800K - 6500K • Powerful glare control due to the fixtures 30° shielding angle, 45° vertical tilting, and 360° horizontal rotation 	<p>Construction:</p> <ul style="list-style-type: none"> • Two piece die-cast aluminum constructed body and trim
<p>LED:</p> <ul style="list-style-type: none"> • High output COB LED with a 3-step Mac Adam ellipse • Rated operational life of 50,000 hours at L70 (LED maintains 70% of its initial delivered lumens when brand new for 50,000 hours of use.) 	<p>Trim and Reflector:</p> <ul style="list-style-type: none"> • Available in a wall wash (asymmetric) beam angle for even wall illumination both vertically and horizontally
<p>Electrical:</p> <ul style="list-style-type: none"> • Input power is universal 120-277VAC and 50/60 Hz • Available in 14W and 18W power levels 	<p>Installation:</p> <ul style="list-style-type: none"> • Light engine is mounted onto the trim using springs that allow for easy replacement • Heavy gauge retention clips firmly support the trim within the housing
<p>Dimming:</p> <ul style="list-style-type: none"> • DMX512-A with RDM control is built-in for full control of the RGB color gamut and Tunable White CCT range of 1800K - 6500K 	<p>Warranty:</p> <ul style="list-style-type: none"> • WAC Architectural limited warranty up to 5 years • Full warranty found at: wacighting.com/warranty
<p>Notes:</p> <ul style="list-style-type: none"> • The White, Black, and Dark Bronze finishes are all electrostatically powder coated • The Haze finish is enamel coated 	

FQ Color Changing

4" Wall Wash

R4FRWT | R4FRWL | R4FSWT | R4FSWL

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____


PERFORMANCE DATA

Polar Candela Distribution Charts

Samples shown from a trimmed fixture set to 3000K.


ROUND

Asymmetric Beam

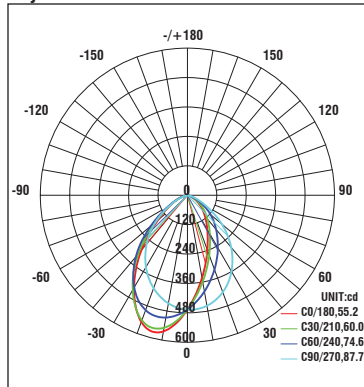

SQUARE

Asymmetric Beam

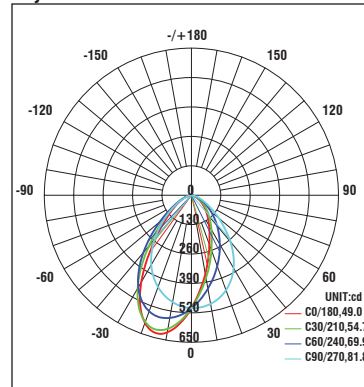

FQ Color Changing

4" Wall Wash

R4FRWT | R4FRWL | R4FSWT | R4FSWL

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____

PERFORMANCE DATA

Unified Glare Rating (UGR) Table

UGR values shown are calculated using trimmed fixtures set to 3000K.

Round Fixture	Angle	UGR Range
Asymmetric	-	≤26

Square Fixture	Angle	UGR Range
Asymmetric	-	≤26

Lumens and CBCP Multiplier Table

Use the below table to determine lumens and CBCP values for the combinations of power, color temperature, and CRI values.

LUMENS AND CBCP MULTIPLIER								
Housing Wattage	Color Temperature							
	1800K	2200K	2700K	3000K	3500K	4000K	5000K	6500K
15W	0.70	0.86	0.97	1.00	1.04	1.08	1.12	1.10

FQ Color Changing

4" Wall Wash

R4FRWT | R4FRWL | R4FSWT | R4FSWL

Fixture Type: _____


Project: _____

Catalog#: _____


Location: _____

DIMENSIONAL DIAGRAMS


Round Trim (R4FRWT)

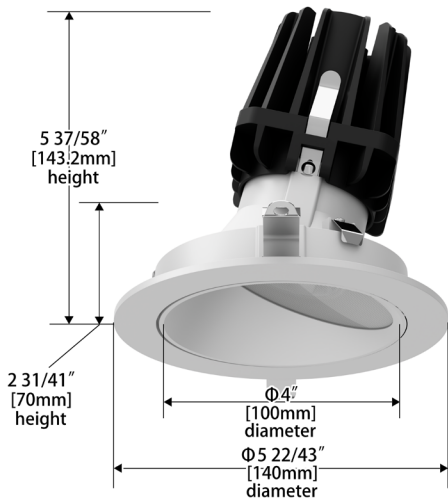

Round Trimless (R4FRWL)

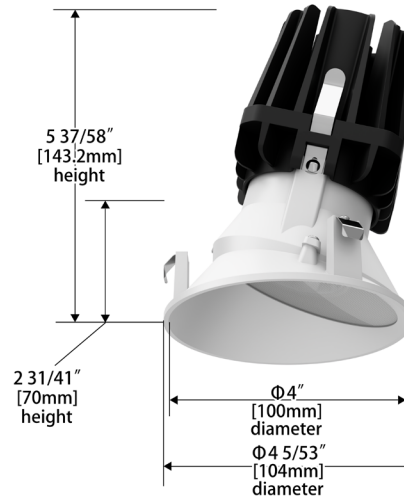

Square Trim (R4FSWT)

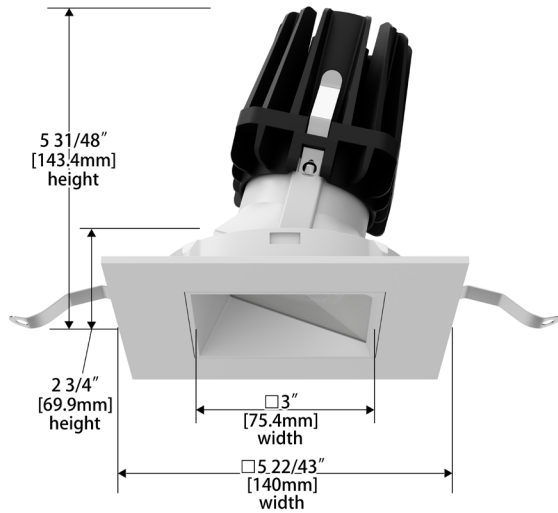

Square Trimless (R4FSWL)



FQ Color Changing

4" Wall Wash

R4FRWT | R4FRWL | R4FSWT | R4FSWL

Fixture Type: _____


Project: _____

Catalog#: _____


Location: _____

DIMENSIONAL DIAGRAMS


New Construction - Round Trim

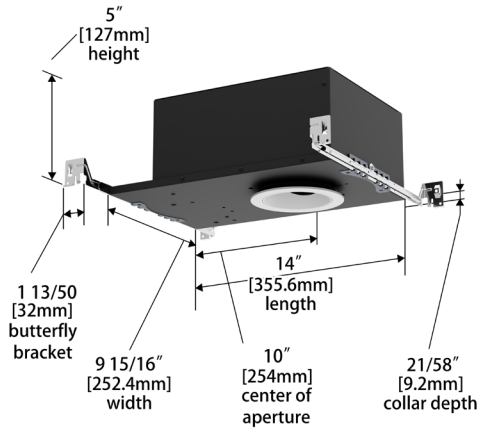


New Construction - Round Trimless

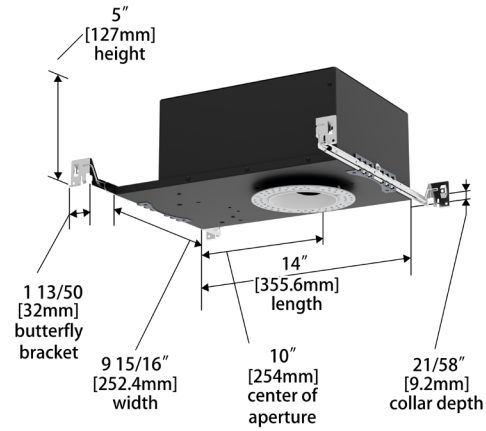

New Construction - Square Trim

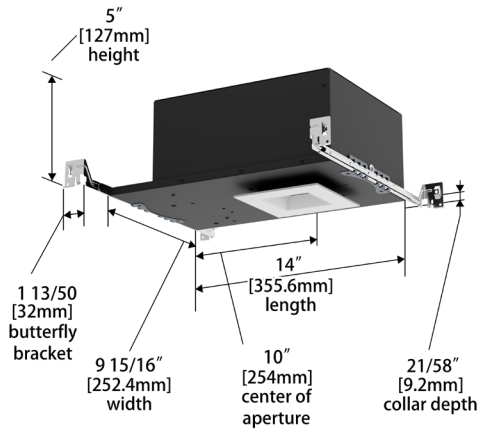

New Construction - Square Trimless

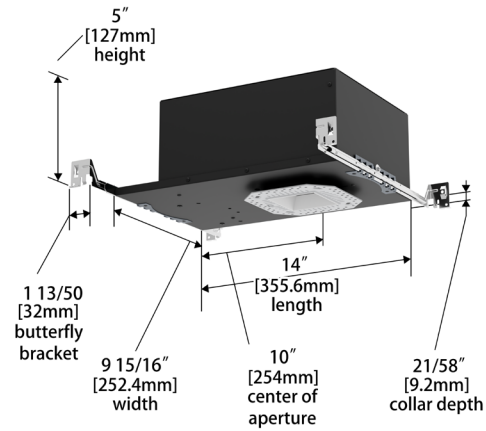

FQ Color Changing

4" Wall Wash

R4FRWT | R4FRWL | R4FSWT | R4FSWL


Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____

EXPLODED VIEW DIAGRAM

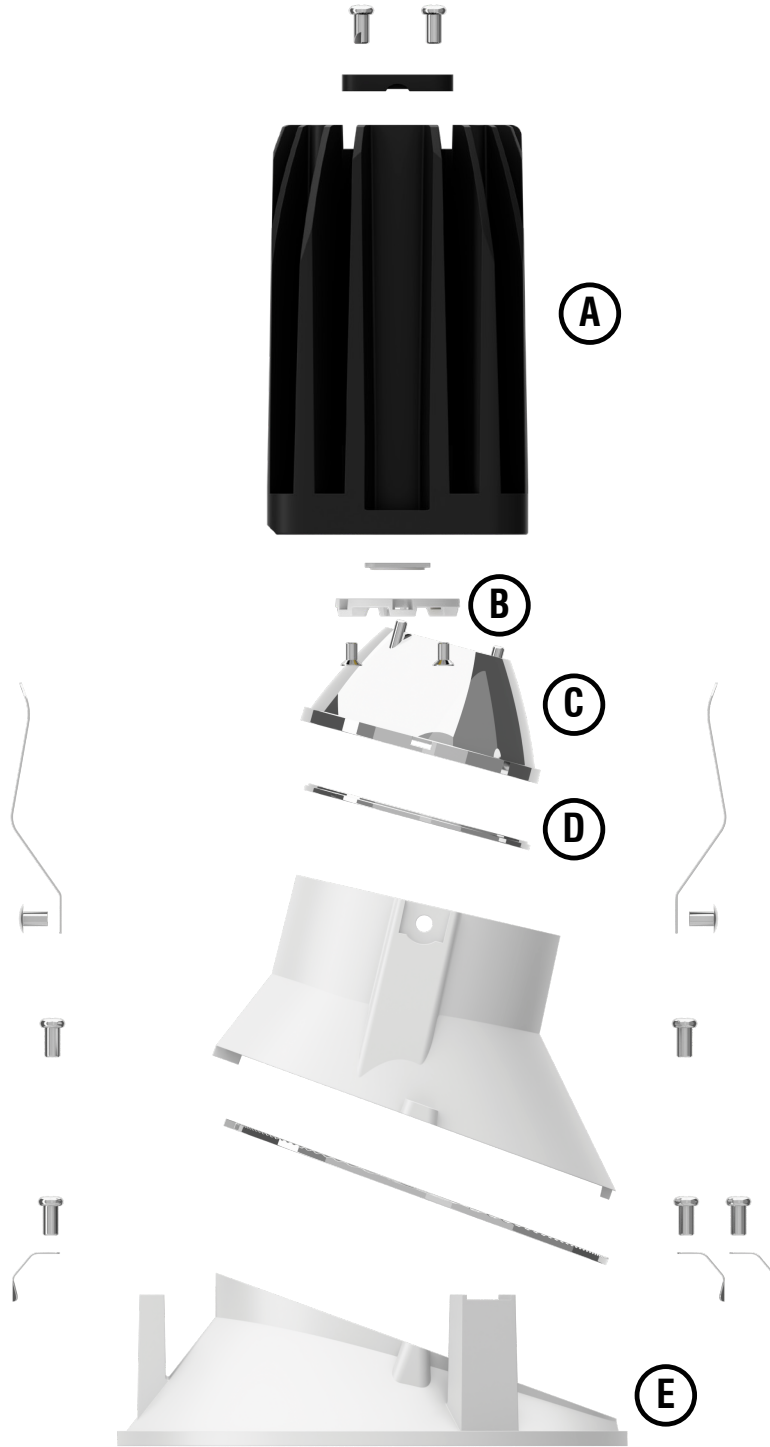

Exploded View	
A	Heat Sink
B	LED
C	Reflector
D	Lens
E	Trim