

## Volta

### Tunable White - 4.5" Wall Wash


R4RWT | R4RWL | R4SWT | R4SWL

Fixture Type: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Catalog#: \_\_\_\_\_  
 Location: \_\_\_\_\_




#### LINE DRAWING

##### TRIM



##### TRIMLESS



#### PRODUCT DESCRIPTION

Volta 4.5" Tunable White recessed series represents an innovation in design and technology for architectural lighting. This high lumen and adaptable family of fixtures with a comprehensive set of round and square fittings, affords a sustainable solution for commercial, corporate, and upscale residential applications. Wall Wash Volta fixtures are equipped with an innovative bidirectional spread lens.

#### SPECIFICATIONS

<b>Construction:</b>	Durable die-cast self flanged aluminum construction
<b>Mounting:</b>	Heavy gauge retention clips support trim firmly Ceiling cut out (Round): Trim $\varnothing$ 5 <sup>1</sup> / <sub>8</sub> " $\bigcirc$ Trimless $\varnothing$ 5 <sup>1</sup> / <sub>8</sub> " $\bigcirc$ Ceiling cut out (Square): Trim 5 <sup>1</sup> / <sub>8</sub> " x 5 <sup>1</sup> / <sub>8</sub> " $\square$ Trimless 5 <sup>1</sup> / <sub>8</sub> " x 5 <sup>1</sup> / <sub>8</sub> " $\square$ Accommodates ceiling thickness of 1/2" - 1"
<b>Light Source:</b>	High output 3-step Mac Adam Ellipse COB Rated life of 50,000 hours at L70
<b>Input:</b>	Universal 120-277V AC, 50/60 Hz
<b>Dimming:</b>	2 Channel 0-10V: 100-0.1% 2 Channel DMX512-A with RDM: 100-0.1% linear dimming. Channels for intensity and CCT tuning.
<b>Maximum Delivered Output:</b>	Up to 2,184 lm (Square Asymmetric, TWB 5000K, CRI 98)
<b>Standards:</b>	ETL & cETL Wet location listed, Title 24 JA8 Compliant
<b>Warranty:</b>	5 year WAC Lighting guaranteed warranty

#### BEAM ANGLES



#### FINISHES



#### TRIM STYLES



Model	Beam	Lumens Ref Output*	CBCP	Color Temp	CRI
R4RWT Round Trim	Round	1610	N/A	<b>TWA</b> 1800K-4000K	98
	Square	1940	N/A		
R4RWL Round Trimless	Round	1620	N/A	<b>TWB</b> 2700K-6500K	98
	Square	1950	N/A		

Lumens and CBCP are reference values for **TWA/TWB** trim tuned to 3000K Color Temperature with **36** housing. Refer to Multiplier Table in Performance Data to determine other outputs.

## Volta

### Tunable White - 4.5" Wall Wash

R4RWT | R4RWL | R4SWT | R4SWL

Fixture Type: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Catalog#: \_\_\_\_\_  
 Location: \_\_\_\_\_

### ORDERING INFORMATION

CONFIGURATION TABLE				
Model & Power	Beam	Color Temperature & CRI	Reflector Finish	Trim Finish
R4RWT	A - Asym	TWA - 1800K-4000K	BK - BLACK	WT - WHITE
R4SWT		TWB - 2700K-6500K	CB - COPPER	
R4RWL			HZ - HAZE	
R4SWL			WT - WHITE	

**R4RWT-**\_\_\_\_-\_\_\_\_ Example: R4RWT-ATWA-WT

HOUSINGS (Required)						
	Model	Trim	Power	Rating	Driver	
New Construction Airtight	<b>R4RN</b> (Round) <b>R4SN</b> (Square)	T <i>Trim</i> L <i>Trimless</i>	15	20W	IC	T-X <i>DMX512-A</i> T-Z <i>2CH 0-10V</i>
			25	29W	IC	
			36	44W	Non-IC	
New Construction Airtight Chicago Plenum	<b>R4RC</b> (Round) <b>R4SC</b> (Square)	T <i>Trim</i> L <i>Trimless</i>	15	20W	IC	T-X <i>DMX512-A</i> T-Z <i>2CH 0-10V</i>
			25	29W	IC	
			36	44W	Non-IC	
Remodel Round or Square	<b>R4BR</b>	T <i>Trim</i>	15	20W	Non-IC	T-X <i>DMX512-A</i> T-Z <i>2CH 0-10V</i>
			25	29W	Non-IC	
			36	44W	Non-IC	
Remodel	<b>R4RR</b> (Round) <b>R4SR</b> (Square)	L <i>Trimless</i>	15	20W	Non-IC	T-X <i>DMX512-A</i> T-Z <i>2CH 0-10V</i>
			25	29W	Non-IC	
			36	44W	Non-IC	

FIELD REPLACEABLE DRIVER (New Construction)
D-R4N-15T-X <i>DMX512-A Driver for 20W</i>
D-R4N-25T-X <i>DMX512-A Driver for 29W</i>
D-R4N-36T-X <i>DMX512-A Driver for 44W</i>
D-R4N-15T-Z <i>2CH 0-10V Driver for 20W</i>
D-R4N-25T-Z <i>2CH 0-10V Driver for 29W</i>
D-R4N-36T-Z <i>2CH 0-10V Driver for 44W</i>

### ORDERING NOTES

- The "White" trim finish is only available with the housing finishes "Black" and "Haze".
- Trimless fixtures cannot be ordered with a trim finish.
- The "Asym" beam angle is available in 20W, 29W, and 44W.

wacarchitectural.com | WAC Architectural, a WAC Group brand.

WAC Group Headquarters  
 44 Harbor Park Drive  
 Port Washington, NY 11050

WAC Lighting  
 Phone (800) 526.2588  
 Fax (800) 526.2585

APR 2026 | P. 2 of 5

WAC GROUP

# Volta

## Tunable White - 4.5" Wall Wash

R4RWT | R4RWL | R4SWT | R4SWL

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Catalog#: \_\_\_\_\_

Location: \_\_\_\_\_


### PERFORMANCE DATA

#### Polar Candela Distribution Charts

Samples shown with a 44W fixture set to 4000K and 98 CRI.


#### ROUND

##### Asymmetric Beam

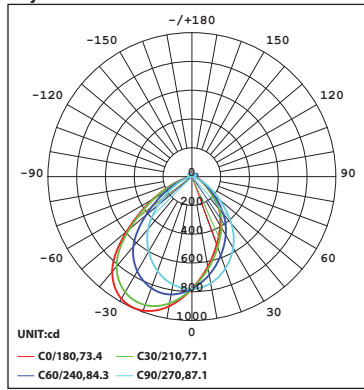

#### SQUARE

##### Asymmetric Beam

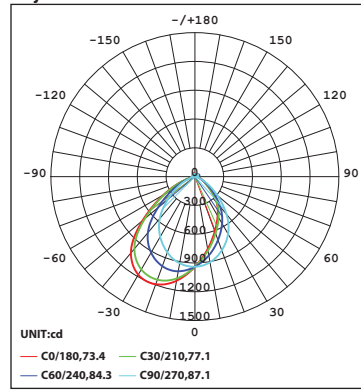

## Volta

### Tunable White - 4.5" Wall Wash

R4RWT | R4RWL | R4SWT | R4SWL

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Catalog#: \_\_\_\_\_

Location: \_\_\_\_\_

### PERFORMANCE DATA

#### Unified Glare Rating (UGR) Table

UGR values shown are calculated for a Round Trim fixture with a 44W Asymmetric Beam (Asym) optic at 4000K and 98 CRI. General performance of other beam angles shown below.

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
<b>x = 2H y = 2H</b>	20.9	22.2	21.2	22.5	22.8	18.0	19.3	18.4	19.6	19.9	
3H	21.4	22.6	21.8	22.9	23.2	18.3	19.5	18.7	19.8	20.2	
4H	21.4	22.5	21.8	22.9	23.3	18.4	19.4	18.8	19.8	20.2	
6H	21.3	22.4	21.8	22.7	23.1	18.4	19.4	18.8	19.8	20.2	
8H	21.3	22.3	21.7	22.7	23.1	18.4	19.3	18.8	19.7	20.2	
12H	21.2	22.2	21.7	22.6	23.0	18.4	19.3	18.8	19.7	20.1	
<b>4H</b>	2H	20.9	22.0	21.3	22.4	22.8	18.5	19.6	18.9	20.0	20.4
3H	21.5	22.5	22.0	22.9	23.3	18.9	19.8	19.3	20.2	20.7	
4H	21.6	22.4	22.1	22.9	23.3	18.9	19.8	19.4	20.2	20.7	
6H	21.5	22.3	22.0	22.7	23.2	19.0	19.7	19.5	20.2	20.7	
8H	21.5	22.2	22.0	22.6	23.2	19.0	19.7	19.5	20.1	20.7	
12H	21.4	22.0	21.9	22.5	23.1	19.0	19.6	19.5	20.1	20.7	
<b>8H</b>	4H	21.5	22.2	22.0	22.6	23.2	18.9	19.6	19.4	20.1	20.6
6H	21.4	22.0	21.9	22.5	23.0	18.9	19.5	19.5	20.0	20.6	
8H	21.4	21.9	21.9	22.4	23.0	19.0	19.5	19.5	20.0	20.6	
12H	21.3	21.7	21.9	22.3	22.9	19.0	19.5	19.6	20.0	20.6	
<b>12H</b>	4H	21.4	22.0	21.9	22.5	23.1	18.8	19.5	19.4	20.0	20.5
6H	21.3	21.8	21.9	22.4	23.0	18.9	19.4	19.5	19.9	20.5	
8H	21.3	21.7	21.9	22.3	22.9	18.9	19.4	19.5	19.9	20.5	

Round Fixture	Angle	UGR Range
Asymmetric	-	≤23

Square Fixture	Angle	UGR Range
Asymmetric	-	≤24

#### Lumens and CBCP Multiplier Table

Use the below table to determine lumens and CBCP values for the combinations of power, color temperature, and CRI values.

Lumens & CBCP Multiplier		Color Temperature					
TWA (1800K - 4000K)	Housing Power Level	1800K	2200K	2700K	3000K	3500K	4000K
	36 (44W)	0.68	0.82	0.94	1.00	1.07	1.11
	25 (29W)	0.48	0.57	0.66	0.70	0.75	0.78
	15 (20W)	0.33	0.39	0.45	0.48	0.51	0.53
TWB (2700K - 6500K)	Housing Power Level	2700K	3000K	3500K	4000K	5000K	6500K
	36 (44W)	0.96	1.00	1.06	1.09	1.12	1.11
	25 (29W)	0.67	0.70	0.74	0.76	0.78	0.78
	15 (20W)	0.46	0.48	0.51	0.52	0.54	0.53

# Volta

## Tunable White - 4.5" Wall Wash

R4RWT | R4RWL | R4SWT | R4SWL

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Catalog#: \_\_\_\_\_

Location: \_\_\_\_\_

### PERFORMANCE DATA

#### NATURAL TUNABLE WHITE CCT TUNING:

The CCT of the Volta Tunable White fixture may be adjusted.

Using the DMX byte values in the adjacent table mapped to CH1 and CH2 of the desired output, the Volta Tunable White fixture may be tuned to increments of 100K (Kelvin) from 1800K to 4000K for TWA and 2700K to 6500K for TWB, at full intensity.

**Note:** Through compatible RDM tool, fixture channels can be reassigned to desired consecutive channels. Factory default is DMX channel 1 and 2.

#### VOLTA 4.5" TUNABLE WHITE DMX BYTE VALUE VS CCT

##### TWA DMX BYTE VALUES AT FULL INTENSITY

CCT (K)	CH 1: INTENSITY	CH 2: CCT
4000	255	255
3900	255	250
3800	255	240
3700	255	230
3600	255	219
3500	255	207
3400	255	196
3300	255	186
3200	255	176
3100	255	163
3000	255	153
2900	255	140
2800	255	130
2700	255	117
2600	255	105
2500	255	92
2400	255	79
2300	255	66
2200	255	51
2100	255	38
2000	255	23
1900	255	10
1800	255	0

##### TWB DMX BYTE VALUES AT FULL INTENSITY

CCT (K)	CH 1: INTENSITY	CH 2: CCT
6500	255	252
6400	255	249
6300	255	245
6200	255	243
6100	255	241
6000	255	237
5900	255	234
5800	255	230
5700	255	226
5600	255	222
5500	255	218
5400	255	214
5300	255	210
5200	255	205
5100	255	200
5000	255	195
4900	255	190
4800	255	185
4700	255	180
4600	255	175
4500	255	170
4400	255	164
4300	255	158
4200	255	151
4100	255	143
4000	255	134
3900	255	125
3800	255	119
3700	255	110
3600	255	101
3500	255	92
3400	255	83
3300	255	74
3200	255	64
3100	255	53
3000	255	41
2900	255	29
2800	255	15
2700	255	0