

## Tube Architectural


### 5" Ultra Narrow Single Wall Mount

DS-WS05-U

Fixture Type: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Catalog#: \_\_\_\_\_  
 Location: \_\_\_\_\_



#### LINE DRAWING



#### PRODUCT DESCRIPTION

Precise engineering using the latest energy efficient LED technology with a built-in ultra narrow beam precision optics. An appealing cylindrical profile perfect for accent lighting.

#### SPECIFICATIONS

**Construction:** Durable die-cast aluminum construction  
**Mounting:** Wall mounted  
**Light Source:** High output 3-step Mac Adam Ellipse COB  
 Rated life of 80,000 hours at L70  
**Input:** Universal 120-277V AC 50/60 Hz  
**Dimming:** Electronic low voltage (ELV) : 100 - 10%  
 0-10V: 100 - 20%  
**Maximum Delivered Intensity:** Up to 1462 cd (Ultra Narrow 6°, 4000K, CRI 85)  
**Maximum Delivered Output:** Up to 155 lm (Ultra Narrow 6°, 4000K, CRI 85)  
**Operating Temperature:** -40°F to 104°F (-40°C to 40°C)

**Standards:** IP65 rated, ETL & cETL Wet location listed  
**Warranty:** 5 year WAC Lighting guaranteed warranty

#### BEAM ANGLES



#### FINISHES



Beam	Beam Angle	Color Temp	CRI	Reference Output <sup>1</sup> Lumens	CBCP	Light Direction
U Ultra Narrow	6°	827	2700K	85	125	1182 1363 1411 1462
		830	3000K	85	145	
		835	3500K	85	150	
		840	4000K	85	155	
						B Towards 

Tube Architectural  
5" Ultra Narrow Single Wall Mount  
DS-WS05-U

Fixture Type: \_\_\_\_\_  
Project: \_\_\_\_\_  
Catalog#: \_\_\_\_\_  
Location: \_\_\_\_\_

**ORDERING INFORMATION**

CONFIGURATION TABLE				
Model & Size	Beam	Color Temperature & CRI	Light Direction	Housing Finish
DS-WS05 (11W)	U - 6°	827 - 2700K - 85	B - Towards	BK - BLACK
		830 - 3000K - 85		BZ - BRONZE
		835 - 3500K - 85		GH - GRAPHITE
		840 - 4000K - 85		WT - WHITE

**DS-WS05-U** \_\_\_ - \_\_\_

Example: DS-WS05-U827B-BK

Tube Architectural  
5" Ultra Narrow Single Wall Mount  
DS-WS05-U


Fixture Type: \_\_\_\_\_  
Project: \_\_\_\_\_  
Catalog#: \_\_\_\_\_  
Location: \_\_\_\_\_

**PERFORMANCE DATA**

**Polar Candela Distribution Charts**

Samples shown with a fixture set to 3000K and 90 CRI.

Ultra Narrow Beam: 6° Beam

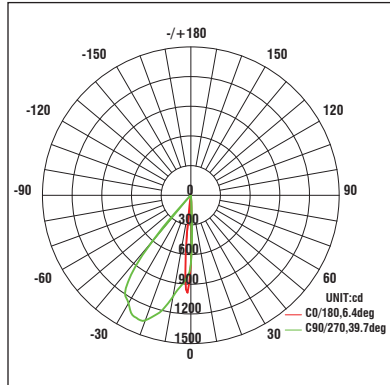

**Unified Glare Rating (UGR) Table**

UGR values shown are calculated for the Ultra Narrow Beam (6°) optic at 3000K and 90 CRI.

Beam	Angle	UGR Range
Ultra Narrow	6°	≤ 0