


## Tube Architectural


### 6" Ultra Narrow Double Wall Mount

DS-WD06-U

Fixture Type: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Catalog#: \_\_\_\_\_  
 Location: \_\_\_\_\_

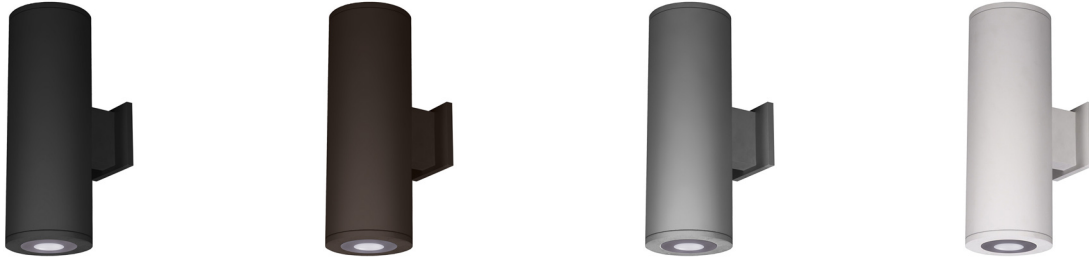

#### LINE DRAWING



#### PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cylindrical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

#### SPECIFICATIONS

**Construction:** Durable die-cast aluminum construction  
**Mounting:** Wall mounted

**Light Source:** High output 3-step Mac Adam Ellipse COB  
 Rated life of 80,000 hours at L70

**Input:** Universal 120-277V AC 50/60 Hz

**Dimming:** Electronic low voltage (ELV) : 100 - 10%  
 0-10V: 100 - 20%

**Maximum Delivered Intensity:** Up to 1462x2 cd (Ultra Narrow 6°, 4000K, CRI 85)  
**Maximum Delivered Output:** Up to 155x2 lm (Ultra Narrow 6°, 4000K, CRI 85)  
**Operating Temperature:** -40°F to 104°F (-40°C to 40°C)

**Standards:** IP65 rated, ETL & cETL Wet location listed  
**Warranty:** 5 year WAC Lighting guaranteed warranty

#### BEAM ANGLES



#### FINISHES



Beam	Beam Angle	Color Temp	CRI	Reference Lumens	Output x2 <sup>1</sup> CBCP	Light Direction
U Ultra Narrow	6°	827	2700K	85	125	1182
		830	3000K	85	145	1363
		835	3500K	85	150	1411
		840	4000K	85	155	1462
						B Towards

Tube Architectural  
6" Ultra Narrow Double Wall Mount  
DS-WD06-U

Fixture Type: \_\_\_\_\_  
Project: \_\_\_\_\_  
Catalog#: \_\_\_\_\_  
Location: \_\_\_\_\_

**ORDERING INFORMATION**

CONFIGURATION TABLE				
Model & Size	Beam	Light Direction	Color Temperature & CRI	Housing Finish
DS-WD06 (22W)	U - 6°	B - Towards	827 - 2700K - 85	BK - BLACK
			830 - 3000K - 85	BZ - BRONZE
			835 - 3500K - 85	GH - GRAPHITE
			840 - 4000K - 85	WT - WHITE

**DS-WD06-U** \_\_\_ - \_\_\_

Example: DS-WD05-U827-BK

Tube Architectural  
6" Ultra Narrow Double Wall Mount  
DS-WD06-U


Fixture Type: \_\_\_\_\_  
Project: \_\_\_\_\_  
Catalog#: \_\_\_\_\_  
Location: \_\_\_\_\_

**PERFORMANCE DATA**

**Polar Candela Distribution Charts**

Samples shown with a 25W fixture set to 3000K and 90 CRI.

Ultra Narrow Beam: 6° Beam

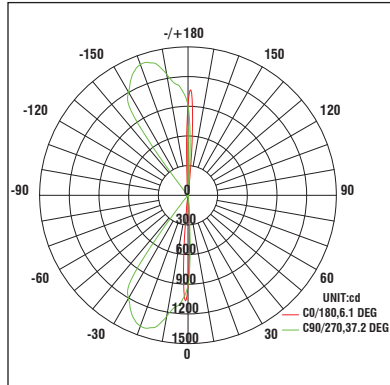

**Unified Glare Rating (UGR) Table**

UGR values shown are calculated for an optic at 3000K and 90 CRI.

Beam	Angle	UGR Range
Ultra Narrow	6°	≤ 20