

## Tube Architectural

### 6" Ultra Narrow Single Wall Mount

DS-WS06-U

Fixture Type: \_\_\_\_\_


Project: \_\_\_\_\_

Catalog#: \_\_\_\_\_

Location: \_\_\_\_\_



#### LINE DRAWING



#### PRODUCT DESCRIPTION

Precise engineering using the latest energy efficient LED technology with a built-in ultra narrow beam precision optics. An appealing cylindrical profile perfect for accent lighting.

#### SPECIFICATIONS

**Construction:** Durable die-cast aluminum construction

**Mounting:** Wall mounted

**Light Source:** High output 3-step Mac Adam Ellipse COB  
Rated life of 80,000 hours at L70

**Input:** Universal 120-277V AC 50/60 Hz

**Dimming:** Electronic low voltage (ELV) : 100 - 10%  
0-10V: 100 - 20%

**Maximum Delivered Intensity:** Up to 1532 cd (Ultra Narrow 6°, 4000K, CRI 85)

**Maximum Delivered Output:** Up to 135 lm (Ultra Narrow 6°, 4000K, CRI 85)

**Operating Temperature:** -40°F to 104°F (-40°C to 40°C)

**Standards:** IP65 rated, ETL & cETL Wet location listed

**Warranty:** 5 year WAC Lighting guaranteed warranty

#### BEAM ANGLES



#### FINISHES



| Beam                 | Beam Angle | Color Temp | CRI   | Reference Output <sup>1</sup><br>Lumens | CBCP | Light Direction         |
|----------------------|------------|------------|-------|---|------|-------------------------|
| U<br>Ultra<br>Narrow | 6°         | <b>827</b> | 2700K | 85                                      | 110  | 1239                    |
|                      |            | <b>830</b> | 3000K | 85                                      | 130  | 1428                    |
|                      |            | <b>835</b> | 3500K | 85                                      | 130  | 1478                    |
|                      |            | <b>840</b> | 4000K | 85                                      | 135  | 1532                    |
|                      |            |            |       |   |      | <b>B</b><br>Towards<br> |

# Tube Architectural

## 6" Ultra Narrow Single Wall Mount

DS-WS06-U

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Catalog#: \_\_\_\_\_

Location: \_\_\_\_\_

### ORDERING INFORMATION

| CONFIGURATION TABLE |        |                         |                 |                |
|---------------------|--------|-------------------------|-----------------|----------------|
| Model & Size        | Beam   | Color Temperature & CRI | Light Direction | Housing Finish |
| DS-WS06 (11W)       | U - 6° | 827 - 2700K - 85        | B - Towards     | BK - BLACK     |
|                     |        | 830 - 3000K - 85        |                 | BZ - BRONZE    |
|                     |        | 835 - 3500K - 85        |                 | GH - GRAPHITE  |
|                     |        | 840 - 4000K - 85        |                 | WT - WHITE     |

**DS-WS06-U** \_\_\_ - \_\_\_

Example: DS-WS06-U827B-BK

Tube Architectural  
6" Ultra Narrow Single Wall Mount  
DS-WS06-U


Fixture Type: \_\_\_\_\_  
Project: \_\_\_\_\_  
Catalog#: \_\_\_\_\_  
Location: \_\_\_\_\_

**PERFORMANCE DATA**

**Polar Candela Distribution Charts**

Samples shown with a 25W fixture set to 3000K and 90 CRI.

Ultra Narrow Beam: 6° Beam

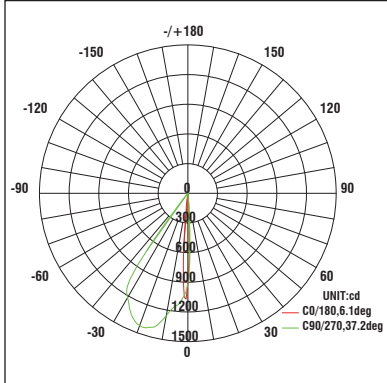

**Unified Glare Rating (UGR) Table**

UGR values shown are calculated for an optic at 3000K and 90 CRI.

| Beam         | Angle | UGR Range |
|--------------|-------|-----------|
| Ultra Narrow | 6°    | ≤ 0       |