

Zoron

Square - 4" Wall Mount


W4S | W4S-P

Fixture Type: _____



Project: _____

Catalog#: _____

Location: _____



LINE DRAWING

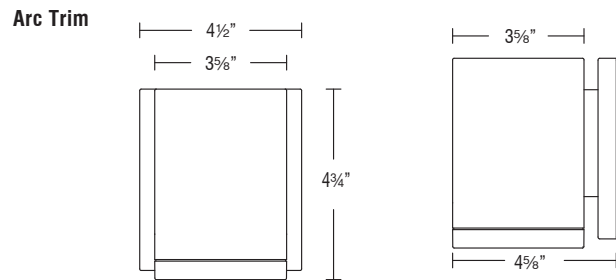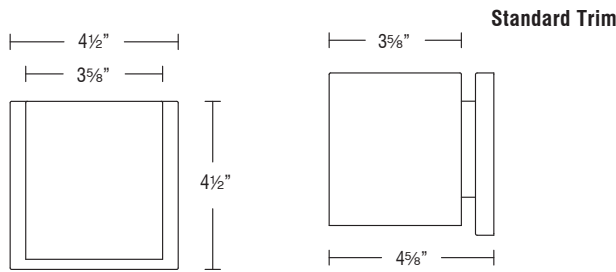

PRODUCT DESCRIPTION

The Zoron series combines sleek aesthetics with exceptional performance. Compact and stylish enough for residential applications, yet powerful enough to be used commercially. With built-in color temperature selection and the option to be used either indoors or out, Zoron adapts to any setting. Regressed trims and specialized TIR optics provide both aesthetic appeal and glare control, making Zoron the perfect blend of form and function.

SPECIFICATIONS

Construction:	Durable die-cast aluminum construction
Mounting:	Ceiling mounted
Light Source:	High output 3-step Mac Adam Ellipse COB Rated life of 50,000 hours at L70
Input:	Universal 120-277V AC 50/60 Hz
Power:	15W
Dimming:	ELV, 0-10V, TRIAC : 100 - 5%
Maximum Delivered Intensity:	Up to 3585 cd (Arc Trim, Narrow Flood 25°, 5000K)
Maximum Delivered Output:	Up to 1325 lm (Standard, Flood 45°, 5000K)
Operating Temperature:	-13°F to 122°F (-25°C to 50°C)
Standards:	IP65 rated, ETL & cETL Wet location listed Title 24 JA8 Compliant
Warranty:	5 year WAC Lighting guaranteed warranty

FINISHES



Model	Beam	Color Temp	CRI	Lumens	CBCP	Efficacy (lm/W)
				Ref Output*		
W4S Standard Trim	N 25°	2700K	90	1015	2985	68
		3000K		1060	3310	71
		3500K		1100	3235	73
	F 45°	4000K	90	1130	3330	75
		5000K		1185	3485	79
		2700K		1135	1945	76
W4S Arc Trim	N 25°	3000K	90	1180	2025	79
		3500K		1230	2105	82
		4000K		1265	2165	84
	F 45°	5000K	90	1325	2265	88
		2700K		910	3075	61
		3000K		945	3200	63
W4S Arc Trim	N 25°	3500K	90	985	3330	66
		4000K		1010	3425	67
		5000K		1060	3585	71
	F 45°	2700K	90	1065	1950	71
		3000K		1110	2035	74
		3500K		1150	2115	77
F 45°	4000K	90	1185	2175	79	
	5000K		1240	2275	83	

BEAM ANGLES



Zoron

Square - 4" Wall Mount

W4S | W4S-P

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____

ORDERING INFORMATION

CONFIGURATION TABLE				
Model & Power	Beam	Color Temperature & CRI	Housing Finish	Trim Finish
W4S	N - 25° F - 45°	CS - 5 CCT SWITCH	BK - BLACK WT - WHITE PBK - ARC BLACK PWT - ARC WHITE	CH - CHROME GL - GOLD HZ - HAZE WT - WHITE

W4S - CS - _____

Example: W4S-NCS-WTHZ

W4S-NCS-PBK

ORDERING NOTES

- Arc Trim fixtures can only be ordered with the finishes Arc Black (PBK) and Arc White (PWT). These finishes cannot be ordered with a trim finish.

Zoron

Square - 4" Wall Mount

W4S | W4S-P

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____


PERFORMANCE DATA

Polar Candela Distribution Charts

Samples shown with a 15W fixture set to 3000K and 90 CRI.


Standard Trim

Narrow Flood Beam: 25° Beam

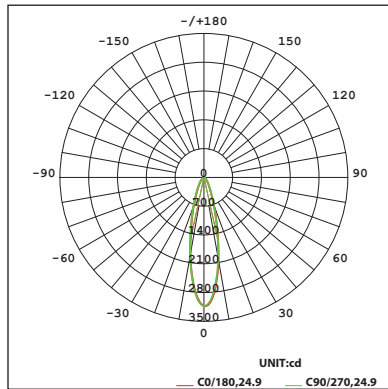


Arc Trim


Narrow Flood Beam: 25° Beam

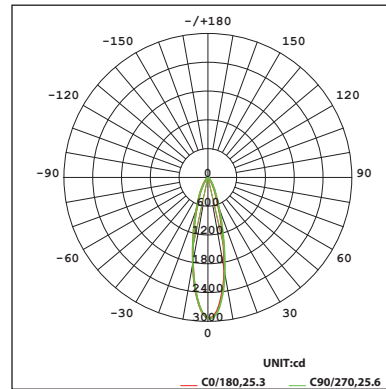

Flood Beam: 45° Beam

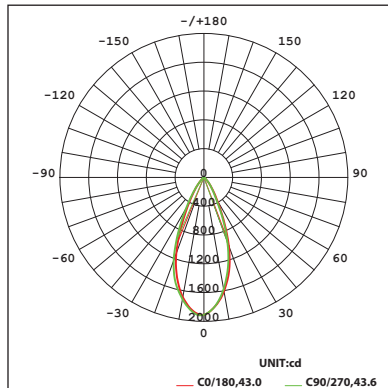

Flood Beam: 45° Beam

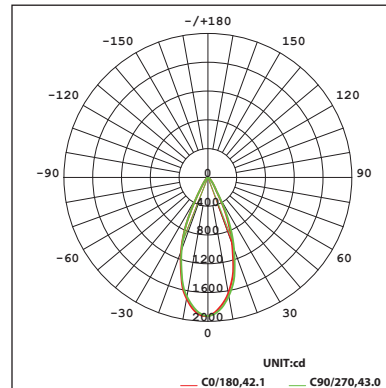

Zoron

Square - 4" Wall Mount

W4S | W4S-P

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____

PERFORMANCE DATA

Unified Glare Rating (UGR) Table

UGR values shown are calculated for a Standard Trim Narrow Flood Beam (25°) optic at 3000K and 90 CRI. General performance of other beam angles shown below.

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.1	16.9	16.3	17.1	17.3	16.1	17.0	16.3	17.1	17.3
3H	16.0	16.8	16.3	17.0	17.2	16.1	16.9	16.3	17.0	17.2
4H	16.0	16.7	16.3	17.0	17.2	16.0	16.8	16.3	17.0	17.2
6H	15.9	16.6	16.2	16.9	17.1	15.9	16.7	16.2	16.9	17.1
8H	15.9	16.6	16.2	16.8	17.1	15.9	16.6	16.2	16.8	17.1
12H	15.8	16.5	16.2	16.8	17.1	15.9	16.5	16.2	16.8	17.1
4H	16.1	16.8	16.3	17.0	17.3	16.1	16.8	16.4	17.1	17.3
3H	16.0	16.7	16.4	17.0	17.2	16.1	16.7	16.4	17.0	17.3
4H	16.0	16.6	16.4	16.9	17.2	16.0	16.6	16.4	16.9	17.2
6H	16.0	16.5	16.3	16.8	17.2	16.0	16.5	16.3	16.8	17.2
8H	15.9	16.4	16.3	16.8	17.1	15.9	16.4	16.3	16.8	17.1
12H	15.9	16.3	16.3	16.7	17.1	15.9	16.4	16.3	16.7	17.1
8H	15.9	16.4	16.3	16.7	17.1	15.9	16.4	16.3	16.8	17.1
6H	15.9	16.3	16.3	16.7	17.1	15.9	16.3	16.3	16.7	17.1
8H	15.8	16.2	16.3	16.6	17.0	15.8	16.2	16.3	16.6	17.1
12H	15.8	16.1	16.3	16.6	17.0	15.8	16.1	16.3	16.6	17.0
12H	15.8	16.3	16.3	16.7	17.1	15.9	16.3	16.3	16.7	17.1
6H	15.8	16.2	16.3	16.6	17.0	15.8	16.2	16.3	16.6	17.0
8H	15.8	16.1	16.3	16.5	17.0	15.8	16.1	16.3	16.5	17.0

Beam - Standard	Angle	UGR Range
Narrow Flood	25°	≤17
Flood	45°	≤16

Beam - Arc Trim	Angle	UGR Range
Narrow Flood	25°	≤21
Flood	45°	≤20