

## Ligne III

### Wall Grazer


LGW12 | LGW24 | LGW48

Fixture Type: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Catalog#: \_\_\_\_\_  
 Location: \_\_\_\_\_




#### LINE DRAWING



##### 12" Length



##### 24" Length



##### 48" Length



#### PRODUCT DESCRIPTION

The LIGNE III features a specialized lens or polarized optical system combined with an optimized LED arrangement, delivering uniform wall illumination with no dark spots or glare. It offers high-efficiency heat dissipation, low energy consumption, and a soft anti-glare lighting effect. With a DC 48V input, fixtures can be connected end-to-end for continuous installation. Ideal for recessed linear wall-washing applications in offices, exhibition halls, hotels, and commercial public areas.

#### SPECIFICATIONS

<b>Construction:</b>	Durable extruded aluminum construction
<b>Mounting:</b>	Surface mounted
<b>Light Source:</b>	3-step Mac Adam Ellipse Rated life of 50,000 hours at L70
<b>Input:</b>	48 VDC
<b>Maximum Delivered Intensity:</b>	Up to 7,811 cd (Asymmetric, 48in, 5000K)
<b>Maximum Delivered Output:</b>	Up to 2,929 lm (Asymmetric, 48in, 5000K)
<b>Operating Temperature:</b>	-4°F to 104°F (-20°C to 40°C)
<b>Standards:</b>	UL & cUL Damp location listed
<b>Warranty:</b>	5 year WAC Lighting guaranteed warranty

#### BEAM ANGLES



#### FINISHES



Model	Beam	Lumens/ft Ref Output*	Color Temp	CRI
LGW Wall Grazer	A Asym	552	927-2700K 930-3000K 935-3500K 940-4000K	90
	S 12°	529		
	N 20°	546		
	M 30°	512		
	F 40°	522.25		
	E Elongating 15° x 45°	511		

\*Lumens and CBCP are reference values for 3000K Color Temperature. Refer to Multiplier Table in Performance Data to determine other outputs.



## Ligne III

### Wall Grazer

LGW12 | LGW24 | LGW48

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Catalog#: \_\_\_\_\_

Location: \_\_\_\_\_

### ORDERING INFORMATION

CONFIGURATION TABLE			
Model & Power	Beam Angle	Color Temperature & CRI	Housing Finish
<b>LGW12</b>	<b>A</b> - Asymmetric	<b>927</b> - 2700K - 90	<b>BK</b> - BLACK
<b>LGW24</b>	<b>S</b> - Spot 12°	<b>930</b> - 3000K - 90	<b>WT</b> - WHITE
<b>LGW48</b>	<b>N</b> - Narrow Flood 20°	<b>935</b> - 3500K - 90	
	<b>M</b> - Medium Flood 30°	<b>940</b> - 4000K - 90	
	<b>F</b> - Flood 40°		
	<b>E</b> - Elongating 15° x 45°		

**LGW\_\_-A\_\_-\_\_**

Example: LGW12-A927-BK

ACCESSORIES	
LGW12-HCM-WT	<i>Honeycomb Louver - White, 12in</i>
LGW12-HCM-BK	<i>Honeycomb Louver - Black, 12in</i>
LGW24-HCM-WT	<i>Honeycomb Louver - White, 24in</i>
LGW24-HCM-BK	<i>Honeycomb Louver - Black, 24in</i>
LGW48-HCM-WT	<i>Honeycomb Louver - White, 48in</i>
LGW48-HCM-BK	<i>Honeycomb Louver - Black, 48in</i>
LGW12-AGV-WT	<i>Grazer Visor - White, 24in</i>
LGW12-AGV-BK	<i>Grazer Visor - Black, 24in</i>
LGW24-AGV-WT	<i>Grazer Visor - White, 48in</i>
LGW24-AGV-BK	<i>Grazer Visor - Black, 48in</i>
LGW48-AGV-WT	<i>Grazer Visor - White, 48in</i>
LGW48-AGV-BK	<i>Grazer Visor - Black, 48in</i>

### ORDERING NOTES

- Holder included with the Honeycomb Louver.
- The Honeycomb Louver holder is available in Black and White finishes. The Honeycomb Louver itself is only available in Black finish.

# Ligne III

## Wall Grazer

LGW12 | LGW24 | LGW48

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Catalog#: \_\_\_\_\_

Location: \_\_\_\_\_

### FEATURES

<p><b>Optics:</b></p> <ul style="list-style-type: none"> <li>• Fixture features asymmetric lens for optimal glare control</li> </ul>	<p><b>Construction:</b></p> <ul style="list-style-type: none"> <li>• Extruded aluminum body for effective heat dissipation</li> </ul>
<p><b>LED:</b></p> <ul style="list-style-type: none"> <li>• High output LED with a 3-step Mac Adam ellipse</li> <li>• Rated operational life of 50,000 hours at L70 (LED maintains 70% of its initial delivered lumens when brand new for 50,000 hours of use.)</li> </ul>	<p><b>Trim and Reflector:</b></p> <ul style="list-style-type: none"> <li>• Six beam angles are available: Wall Wash, Spot, Narrow Flood, Medium Flood, Flood, and an Elongating 15° x 45°</li> <li>• Optimized LED alignment produces smooth, uniform vertical illumination free from dark zones</li> </ul>
<p><b>Electrical:</b></p> <ul style="list-style-type: none"> <li>• Input power is 48 VDC</li> <li>• Available at 12W for 24" lengths and 24W for 48" lengths</li> </ul>	<p><b>Installation:</b></p> <ul style="list-style-type: none"> <li>• Fixture supports surface mounting</li> </ul>
<p><b>Dimming:</b></p> <ul style="list-style-type: none"> <li>• 0-10V dimming available</li> <li>• 0-10V dimming is capable of a range of 100 - 0% with a dimming depth of 0.1%</li> </ul>	<p><b>Warranty:</b></p> <ul style="list-style-type: none"> <li>• WAC Architectural limited warranty up to 5 years</li> <li>• Full warranty found at: <a href="http://wacighting.com/warranty">wacighting.com/warranty</a></li> </ul>
<p><b>Notes:</b></p> <ul style="list-style-type: none"> <li>• The White and Black finishes for the body are electrostatically powder coated</li> </ul>	

## Ligne III

### Wall Grazer

LGW12 | LGW24 | LGW48

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Catalog#: \_\_\_\_\_

Location: \_\_\_\_\_


## PERFORMANCE DATA

### Polar Candela Distribution Charts


Samples shown from a fixture set to 3000K.

#### LGW12


**Asymmetric Beam (Asym)**

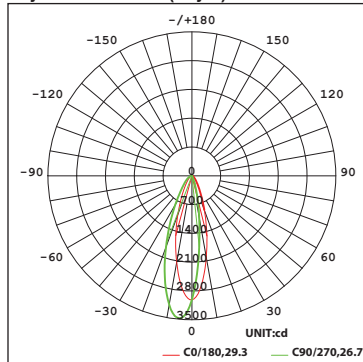


**S - Spot Beam 12°**

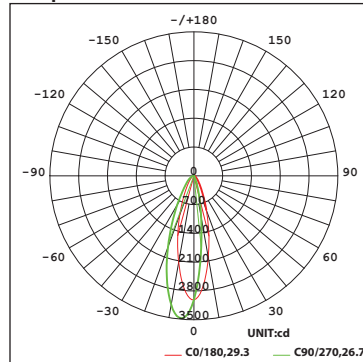


**N - Narrow Flood Beam 20°**

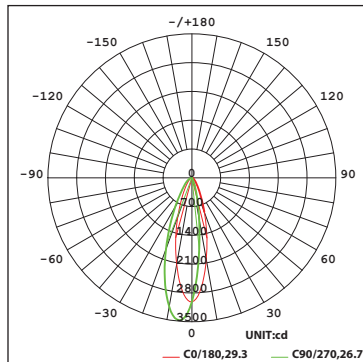


**M - Medium Flood Beam 30°**

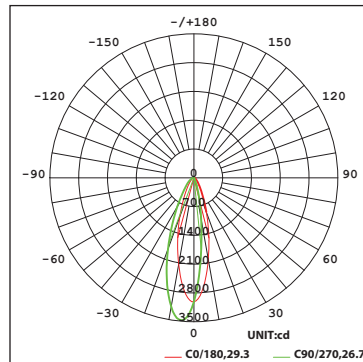

**F - Flood Beam 40°**

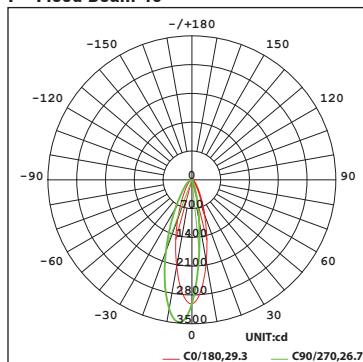

**E - Elongating Beam 15° x 45°**

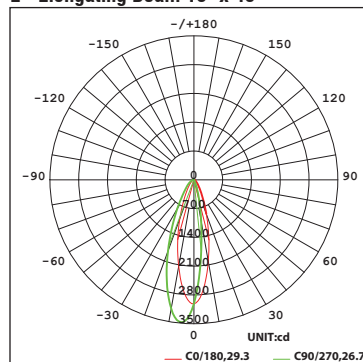

# Ligne III

## Wall Grazer

LGW12 | LGW24 | LGW48

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Catalog#: \_\_\_\_\_

Location: \_\_\_\_\_

### PERFORMANCE DATA

#### Unified Glare Rating (UGR) Table

Samples shown from a fixture set to 3000K.

24in Fixture	Angle	UGR Range
Asymmetric	-	≤26

48in Fixture	Angle	UGR Range
Asymmetric	-	≤25

#### Lumens and CBCP Multiplier Table

Use the below table to determine lumens and CBCP values for the combinations of power, color temperature, and CRI values.

Color Temperature				
2700K	3000K	3500K	4000K	5000K
0.96	1.00	1.02	1.07	1.12

# Ligne III

## Wall Grazer

LGW12 | LGW24 | LGW48


Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Catalog#: \_\_\_\_\_

Location: \_\_\_\_\_

### DIMENSIONAL DIAGRAMS

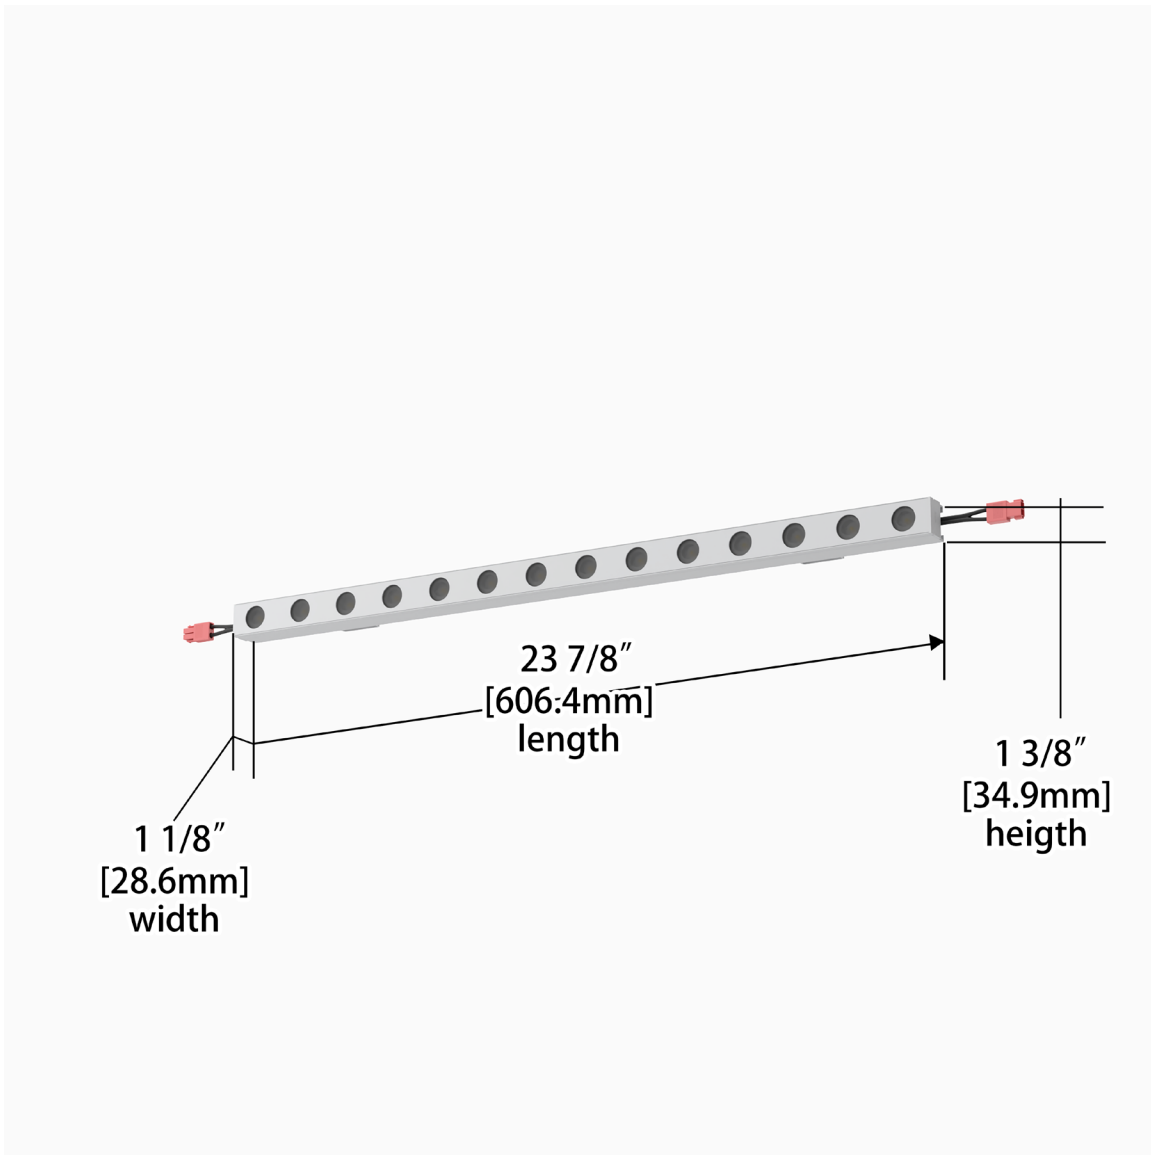


## Ligne III

### Wall Grazer


LGW12 | LGW24 | LGW48

Fixture Type: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Catalog#: \_\_\_\_\_  
 Location: \_\_\_\_\_

#### WIRING DIAGRAM

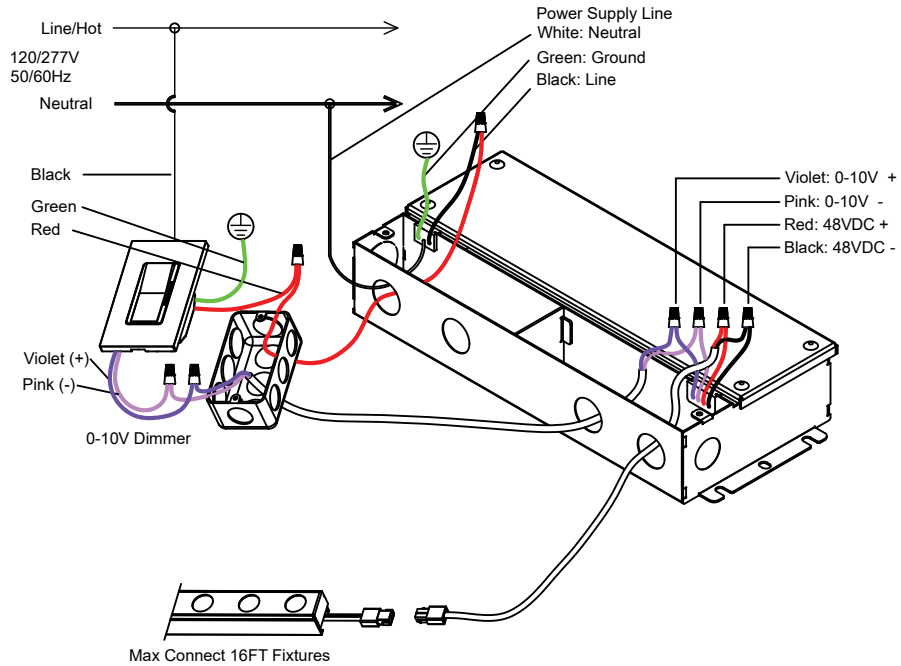

LIGNE III 0-10V Dimming Wiring Diagram  
 Up Date Version: 04102026 A

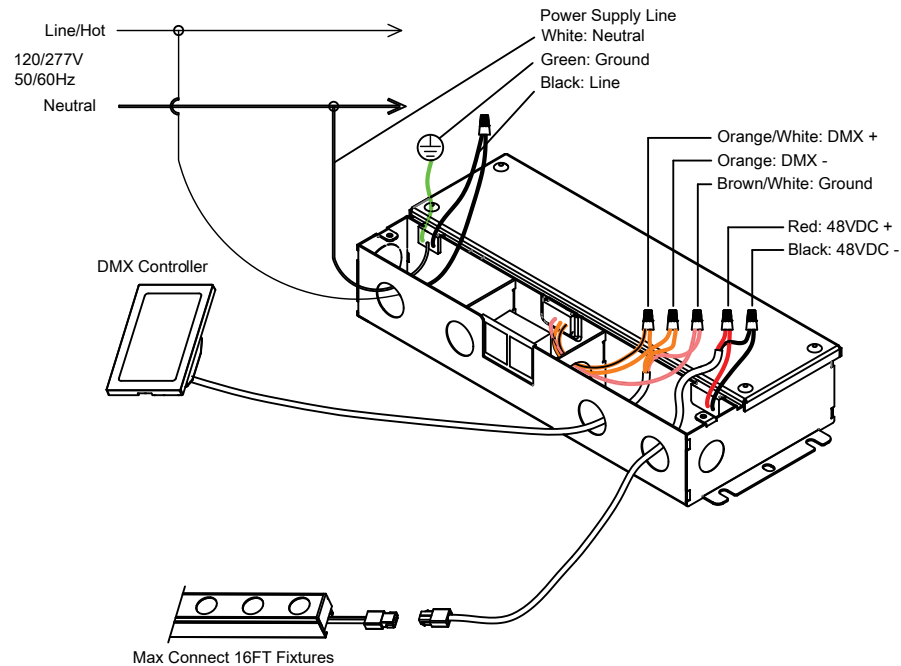

LIGNE III DMX Dimming Wiring Diagram  
 Up Date Version: 04102026 A