

## CUBE

### 6" Ultra Narrow Double Wall Mount


DC-WD06-U

Fixture Type: \_\_\_\_\_


Project: \_\_\_\_\_

Catalog#: \_\_\_\_\_

Location: \_\_\_\_\_

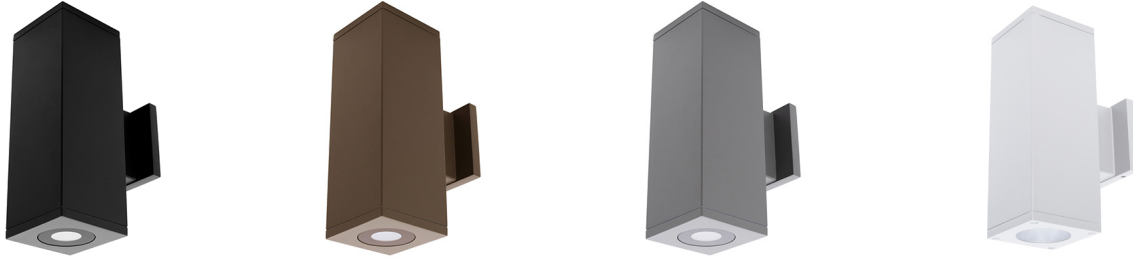

#### LINE DRAWING

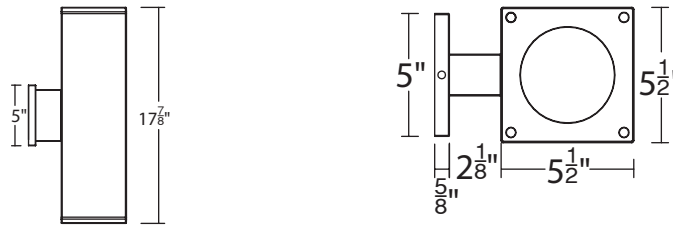

#### PRODUCT DESCRIPTION

Precise engineering using the latest energy efficient LED technology with a built-in ultra narrow beam precision optics. An appealing cubical profile perfect for accent lighting.

#### BEAM ANGLES



#### SPECIFICATIONS

<b>Construction:</b>	Durable die-cast aluminum construction
<b>Mounting:</b>	Wall mounted
<b>Light Source:</b>	High output 3-step Mac Adam Ellipse COB Rated life of 80,000 hours at L70
<b>Input:</b>	Universal 120-277V AC 50/60 Hz
<b>Dimming:</b>	Electronic low voltage (ELV) : 100 - 10% (120V only) 0-10V: 100 - 20%
<b>Maximum Delivered Intensity:</b>	Up to 1462x2 cd (Ultra Narrow 6°, 4000K, CRI 85)
<b>Maximum Delivered Output:</b>	Up to 155x2 lm (Ultra Narrow 6°, 4000K, CRI 85)
<b>Operating Temperature:</b>	-40°F to 104°F (-40°C to 40°C)

#### FINISHES



Beam	Beam Angle	Color Temp	CRI	Reference Lumens	Output x2 <sup>1</sup> CBCP	Light Direction
U Ultra Narrow	6°	<b>827</b>	2700K	85	125	1182
		<b>830</b>	3000K	85	145	1363
		<b>835</b>	3500K	85	150	1411
		<b>840</b>	4000K	85	155	1462
						<b>B</b> Towards 

**Standards:** IP65 rated, ETL & cETL wet location listed  
**Warranty:** 5 year WAC Lighting guaranteed warranty

CUBE

6" Ultra Narrow Double Wall Mount

DC-WD06-U

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Catalog#: \_\_\_\_\_

Location: \_\_\_\_\_

**ORDERING INFORMATION**

CONFIGURATION TABLE				
Model & Size	Beam	Color Temperature & CRI	Light Direction	Housing Finish
<b>DC-WD06 (22W)</b>	<b>U - 6°</b>	<b>827 - 2700K - 85</b>	<b>B - Towards</b>	<b>BK - BLACK</b>
		<b>830 - 3000K - 85</b>		<b>BZ - BRONZE</b>
		<b>835 - 3500K - 85</b>		<b>GH - GRAPHITE</b>
		<b>840 - 4000K - 85</b>		<b>WT - WHITE</b>

**DC-WD06-U** \_\_\_ - \_\_\_

Example: DC-WD05-U27B-BK

# CUBE

## 6" Ultra Narrow Double Wall Mount

DC-WD06-U

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Catalog#: \_\_\_\_\_

Location: \_\_\_\_\_

### FEATURES

<p><b>Optics:</b></p> <ul style="list-style-type: none"> <li>• High lumen output at four different CCT/CRI combinations available</li> </ul>	<p><b>Construction:</b></p> <ul style="list-style-type: none"> <li>• Solid aluminum construction</li> <li>• IP65 wet location listed</li> <li>• Driver concealed within fixture body</li> </ul>
<p><b>LED:</b></p> <ul style="list-style-type: none"> <li>• High output COB LED with a 3-step Mac Adam ellipse</li> <li>• Rated operational life of 80,000 hours at L70 (LED maintains 70% of its initial delivered lumens when brand new for 60,000 hours of use.)</li> </ul>	<p><b>Trim and Reflector:</b></p> <ul style="list-style-type: none"> <li>• Available in an ultra narrow beam angle (6°) only</li> </ul>
<p><b>Electrical:</b></p> <ul style="list-style-type: none"> <li>• Available in a 22W power level</li> </ul>	<p><b>Installation:</b></p> <ul style="list-style-type: none"> <li>• Mounting plate secures the fixture to the applicable junction box</li> <li>• Reflector can be replaced by removing one front panel assembly</li> </ul>
<p><b>Dimming:</b></p> <ul style="list-style-type: none"> <li>• Electronic Low Voltage (ELV) and 0-10V dimming are available</li> <li>• ELV dimming is capable of a 100 - 10% range at 120V only</li> <li>• 0-10V dimming is capable of a 100 - 2-% range</li> </ul>	<p><b>Warranty:</b></p> <ul style="list-style-type: none"> <li>• WAC Architectural limited warranty up to 5 years</li> <li>• Full warranty found at: <a href="http://wacighting.com/warranty">wacighting.com/warranty</a></li> </ul>
<p><b>Notes:</b></p> <ul style="list-style-type: none"> <li>• The White, Black, Bronze, and Graphite finishes are all electrostatically powder coated</li> </ul>	