


VOLO- MODEL: AOP1NS

Linear Luminaires


Project Name:

Type:

Product Image

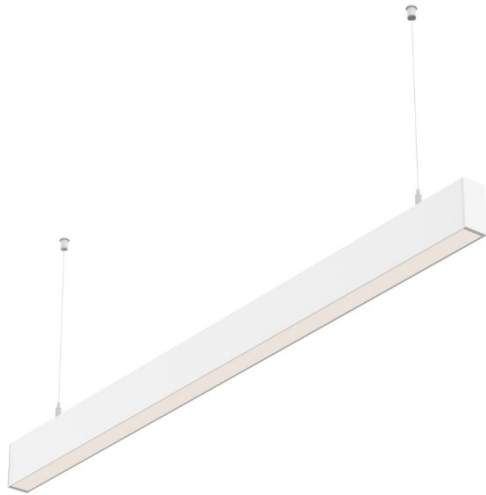

Line Drawing

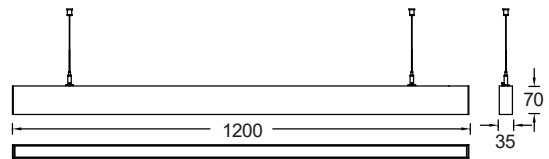

Product Description

VOLO Pendant Linear Light, with aluminum profile light body, simple and beautiful appearance, using LED light source. With good heat dissipation, energy efficient, good anti-glare. Available in customized lengths. Suitable for commercial office lighting applications.

Product Features

- **Body Materials:** Aluminum Extruded Lamp Body
- **Optical System:** Anti-glare Panel
- **Finishes:** Electrostatic Powder Coating
- **Objection Direction:** /
- **Accessory/Bracket:** /
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C~40°C

Product Specifications

- **Shading Angle:** /
 - **LED Type:** SMD LED
 - **Source Lm:** /
 - **LED Lifetime:** >50,000h-L70 /B10-Ta25 °C (LM-80/TM-21)
 - **CCT/CRI:** 3000K/ 3500K/4000K/5000K, Ra90
 - **SDCM:** 3 SDCM
 - **Input:** 220V-240V AC / 50Hz
 - **Dimming:** ON-OFF/0-10V/DALI
- Must be matched with the project site system for testing
- **Net Weight:** Approx. 1.5Kg, excluding packaging

Order Model

Model	Comment	Length(mm)	Power (W)	Driver	Beam	CCT	Finish
AOP1N	S Single Directional	12 1200	25 25W	E ON-OFF D 0-10V Dimming A DALI	P (Matte)	30 3000K	WT White
					Y (Prism)	35 3500K	BK Black
						40 4000K	
						50 5000K	

Example: AOP1NS-1225EP30WT


VOLO- MODEL: AOP1ND

Linear Luminaires


Project Name:

Type:

Product Image

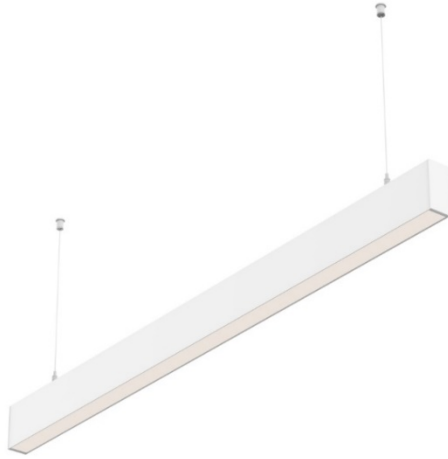

Line Drawing

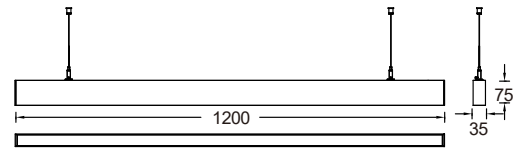

Product Description

VOLO Pendant Linear Light, with aluminum profile light body, simple and beautiful appearance, using LED light source. With good heat dissipation, energy efficient, good anti-glare. Available in customized lengths. Suitable for commercial office lighting applications.

Product Features

- **Body Materials:** Aluminum Extruded Lamp Body
- **Optical System:** Anti-glare Panel
- **Finishes:** Electrostatic Powder Coating
- **Objection Direction:** /
- **Accessory/Bracket:** /
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C~40°C

Product Specifications

- **Shading Angle:** /
 - **LED Type:** SMD LED
 - **Source Lm:** /
 - **LED Lifetime:** >50,000h-L70 /B10-Ta25 °C (LM-80/TM-21)
 - **CCT/CRI:** 3000K/ 3500K/4000K/5000K, Ra90
 - **SDCM:** 3 SDCM
 - **Input:** 220V-240V AC / 50Hz
 - **Dimming:** ON-OFF/0-10V/DALI
- Must be matched with the project site system for testing
- **Net Weight:** Approx. 1.5Kg, excluding packaging

Order Model

Model	Comment	Length(mm)	Power (W)	Driver	Beam Up	Beam Down	CCT	Finish
AOP1N	D Double Directional	12 1200	35 25W downward- illuminated +10W upward- illuminated	E ON-OFF D 0-10V Dimming A DALI	F Frosted	P (Matte) Y (Prism)	30 3000K	WT White BK Black
							35 3500K	
							40 4000K	
							50 5000K	

Example: AOP1ND-1235EFY40WT