

Ligne III
Wall Wash

LWW24 | LWW48

Fixture Type:


Project:

Catalog#:

Location:



LINE DRAWING

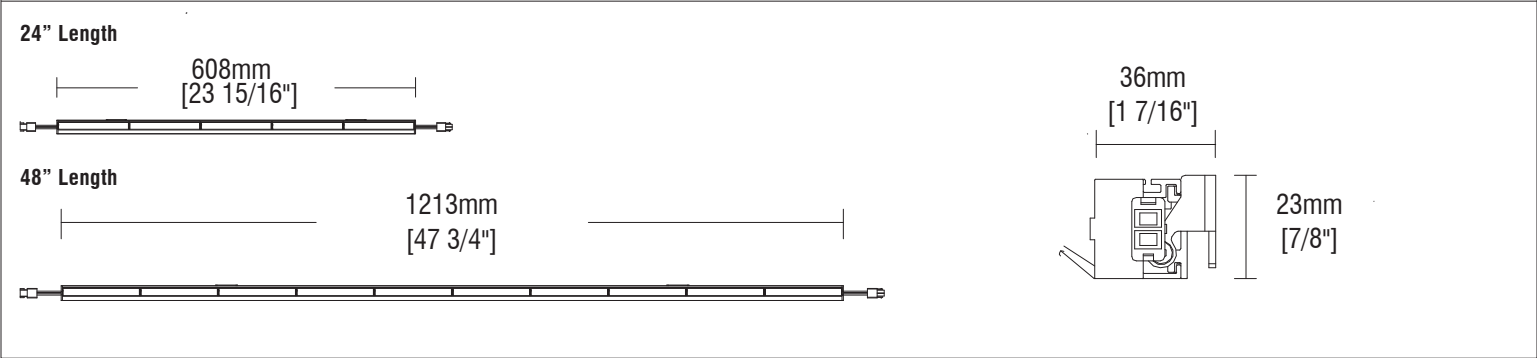

PRODUCT DESCRIPTION

The LIGNE III features a specialized lens or polarized optical system combined with an optimized LED arrangement, delivering uniform wall illumination with no dark spots or glare. It offers high-efficiency heat dissipation, low energy consumption, and a soft anti-glare lighting effect. With a DC 48V input, fixtures can be connected end-to-end for continuous installation. Ideal for recessed linear wall-washing applications in offices, exhibition halls, hotels, and commercial public areas.

BEAM ANGLES



FINISHES



SPECIFICATIONS

Construction:	Durable extruded aluminum construction
Mounting:	Surface mounted
Light Source:	3-step Mac Adam Ellipse Rated life of 50,000 hours at L70
Input:	48 VDC
Maximum Delivered Intensity:	Up to 7,811 cd (Asymmetric, 48in, 5000K)
Maximum Delivered Output:	Up to 2,929 lm (Asymmetric, 48in, 5000K)
Operating Temperature:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL & cUL Damp location listed
Warranty:	5 year WAC Lighting guaranteed warranty

Model	Length	Beam	Power	Lumens Ref Output*	CBCP	Color Temp	CRI
LWW Wall Wash	24in 48in	A Asym	12W 24W	1276 2615	3475 6974	927 - 2700K 930 - 3000K 935 - 3500K 940 - 4000K	90

Lumens and CBCP are reference values for 3000K Color Temperature. Refer to Multiplier Table in Performance Data to determine other outputs.



Ligne III

Wall Wash

LWW24 | LWW48

Fixture Type:

Project:

Catalog#:

Location:

ORDERING INFORMATION

CONFIGURATION TABLE			
Model & Power	Beam Angle	Color Temperature & CRI	Housing Finish
LWW24 LWW48	A - Asymmetric	927 - 2700K - 90	BK - BLACK WT - WHITE
		930 - 3000K - 90	
		935 - 3500K - 90	
		940 - 4000K - 90	

LWW__-A__-__

Example: LWW12-A927-BK

Power Supplies	Power	Channels
0-10V Dimming PS-48DC-U96R-L	96W	1 Channel
0-10V Dimming PS-48DC-U288R-L3	288W	3 Channels
DMX512-A Dimming PS-48DC-U96R-D	96W	1 Channel
DMX512-A Dimming PS-48DC-U288R-D3	288W	3 Channels

ACCESSORIES	
LWW24-HCM-WT	Honeycomb Louver - White,24in
LWW24-HCM-BK	Honeycomb Louver - Black,24in
LWW48-HCM-WT	Honeycomb Louver - White,48in
LWW48-HCM-BK	Honeycomb Louver - Black,48in

ORDERING NOTES	
1.	Holder included with the Honeycomb Louver.
2.	The Honeycomb Louver holder is available in Black and White finishes. The Honeycomb Louver itself is only available in Black finish.

Ligne III

Wall Wash

LWW24 | LWW48

Fixture Type:

Project:

Catalog#:

Location:


PERFORMANCE DATA

Polar Candela Distribution Charts

Samples shown from a fixture set to 3000K.


LWW24

Asymmetric Beam (Asym)

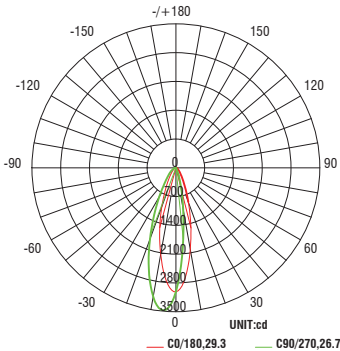

LWW48

Asymmetric Beam (Asym)

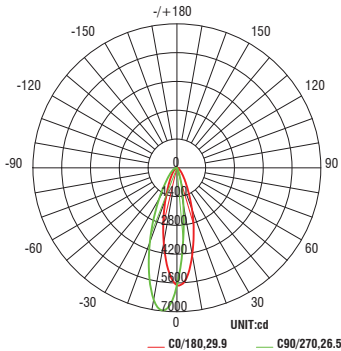

Ligne III

Wall Wash

LWW24 | LWW48

Fixture Type:

Project:

Catalog#:

Location:

PERFORMANCE DATA

Unified Glare Rating (UGR) Table

Samples shown from a fixture set to 3000K.

24in Fixture	Angle	UGR Range	48in Fixture	Angle	UGR Range
Asymmetric	-	≤26	Asymmetric	-	≤25

Lumens and CBCP Multiplier Table

Use the below table to determine lumens and CBCP values for the combinations of power, color temperature, and CRI values.

Color Temperature				
2700K	3000K	3500K	4000K	5000K
0.96	1.00	1.02	1.07	1.12