

VOLTA TUNABLE-MODEL: ADDT41

WAC ARCHITECTURAL

4" Round Narrow Tunable Recessed Downlight


PROJECT:

TYPE:

Product Image



Line Drawing

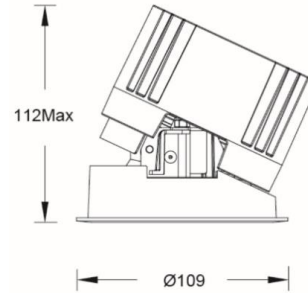

Product Description

VOLTA series LED round narrow recessed downlight, streamlined appearance, with precise lens and black mirror reflector design. It guarantees light output while still achieving the ultimate anti-glare effect, and the light source cavity is sealed to minimize the impact of humid environment on its performance. Free to remove and replace the reflector or optical accessories, greatly improving the convenience of the site. Mainly suitable for hotel and commercial indoor places.

Product Features

- **Body Material :** Aluminum alloy die-casting
- **Optical System:** Lens+ Reflector
- **Finish :** Electricity powder coating
- **Adjustable Angle:** Vertical 0-25°
- **Accessories:** As attached
- **Certification:** CCC
- **IP Rating:** IP20 (light source cavity IP44)
- **Insulation Level:** Class II
- **Operating Temperature:** -20°C~40°C

Product Specifications

- **Cut-out:** Ø100mm
- **Ceiling Thickness:** 1mm~20mm
- **Shielding Angle:** 30°
- **LED Type:** COB
- **Source Lm:** 2000lm
- **LED Lifetime:** >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 2700K~6000K Tunable, CRI≥90
- **Input:** 220V AC / 50Hz
- **Dimming:** DALI(must be matched with the project site system in advance)
- **Net Weight:** 0.6Kg without packing

Order model

Model	Size	Trim	LED	Driver	Beam	CCT	Reflector	Finish
ADDT Downlight T series	4 4"	1 Round Trim	LM18 COB 18W	N No Driver	1 18°	CC 2700K~6000K (Tunable)	B Black S Specular	WT White BK Black
				A DALI	2 28°			
					3 38°			
					5 50°			

Example: ADDT41-LM18A2CCSWT

wacarchitectural.com | WAC Architectural, a WAC GROUP brand.

WAC GROUP Headquarters
44 Harbor Park Drive
Port Washington, NY 11050

25 June 2026 | P .1 of 6

WAC GROUP

WAC Group retains the right to modify the design of our products at any time as part of the company's continuous improvement program.

VOLTA TUNABLE-MODEL: ADDT41



WAC ARCHITECTURAL

4" Round Narrow Tunable Recessed Downlight

PROJECT:


TYPE:

Accessory


ALENS-DDT41-BEL Striped glass lenses		ALENS-DDT41-HCL Borderless honeycomb grille	
--	---	---	---

Attention: At most one optical accessory can be added, and it is not included in the factory. It needs to be ordered separately.


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

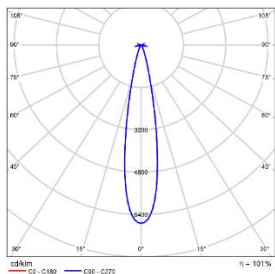


MODEL :	ADDT41-LM18A1CCSWT
ANGLE :	18°
POWER :	21W
LUMENS:	1349lm
CBCP:	9081cd
EFFICACY:	64lm/W

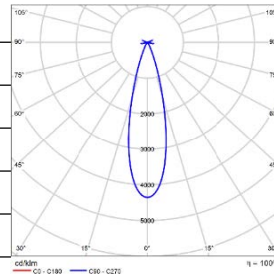

MODEL :	ADDT41-LM18A2CCSWT
ANGLE :	28°
POWER :	21W
LUMENS:	1384lm
CBCP:	6025cd
EFFICACY:	66lm/W

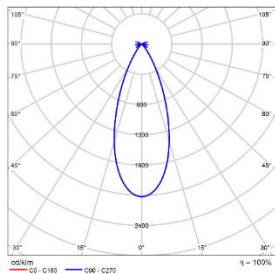

MODEL :	ADDT41-LM18A3CCSWT
ANGLE :	38°
POWER :	21W
LUMENS:	1421lm
CBCP:	2871cd
EFFICACY:	68lm/W

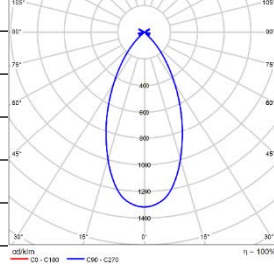

MODEL :	ADDT41-LM18A5CCSWT
ANGLE :	50°
POWER :	21W
LUMENS:	1184lm
CBCP:	1558cd
EFFICACY:	56lm/W

VOLTA TUNABLE-MODEL: ADDT51

WAC ARCHITECTURAL

5" Round Narrow Tunable Recessed Downlight


PROJECT:

TYPE:

Product Image



Line Drawing

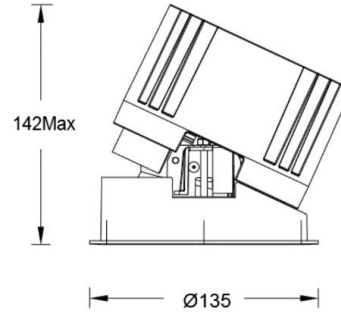

Product Description

VOLTA II series LED round narrow recessed adjustable downlight, streamlined appearance, with precise lens and black mirror reflector design. It guarantees light output while still achieving the ultimate anti-glare effect, and the light source cavity is sealed to minimize the impact of humid environment on its performance. Free to remove and replace the reflector or optical accessories, greatly improving the convenience of the site. Mainly suitable for hotel and commercial indoor places.

Product Features

- **Body Material :** Aluminum alloy die-casting
- **Optical System:** Lens+ Reflector
- **Finish :** Electricity powder coating
- **Adjustable Angle:** Vertical 0-25°
- **Accessories:** As attached
- **Certification:** CCC
- **IP Rating:** IP20 (light source cavity IP44)
- **Insulation Level:** Class II
- **Operating Temperature:** -20°C~40°C

Product Specifications

- **Cut-out:** Ø125mm
- **Ceiling Thickness:** 1mm~25mm
- **Shielding Angle:** 30°
- **LED Type:** COB
- **Source Lm:** 2500lm
- **LED Lifetime:** >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 2700K~6000K Tunable, CRI≥90
- **Input:** 220V AC / 50Hz
- **Dimming:** DALI(must be matched with the project site system in advance)
- **Net Weight:** 1.1Kg without packing

Order model

Model	Size	Trim	LED	Driver	Beam	CCT	Reflector	Finish
ADDT Downlight T series	5 5"	1 Round Trim	LM25 COB 25W	N No Driver A DALI	1 18°	CC 2700K~6000K (Tunable)	B Black S Specular	WT White BK Black
					2 28°			
					3 38°			
					4 48°			
					5 50°			

Example: ADDT51-LM25A2CCSWT

wacarchitectural.com | WAC Architectural, a WAC GROUP brand.

WAC GROUP Headquarters
44 Harbor Park Drive
Port Washington, NY 11050

25 June 2026 | P .3 of 6

WAC GROUP

WAC Group retains the right to modify the design of our products at any time as part of the company's continuous improvement program.

VOLTA TUNABLE-MODEL: ADDT51



WAC ARCHITECTURAL

5" Round Narrow Tunable Recessed Downlight

PROJECT:


TYPE:

Accessory


ALENS-DDT51-BEL Striped glass lenses		ALENS-DDT51-HCL Borderless honeycomb grille	
--	---	---	---

Attention: At most one optical accessory can be added, and it is not included in the factory. It needs to be ordered separately.


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

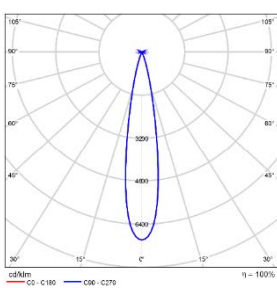


MODEL: ADDT51-LM25A1CCSWT
ANGLE: 18°
POWER: 28W
LUMENS: 2094lm
CBCP: 14632cd
EFFICACY: 75lm/W

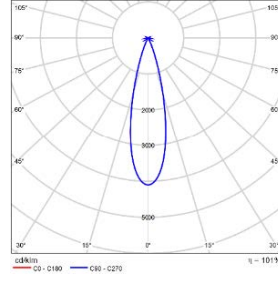

MODEL: ADDT51-LM25A2CCSWT
ANGLE: 28°
POWER: 28W
LUMENS: 1967lm
CBCP: 8073cd
EFFICACY: 70lm/W

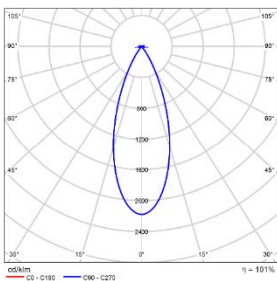

MODEL: ADDT51-LM25A3CCSWT
ANGLE: 38°
POWER: 28W
LUMENS: 2142lm
CBCP: 4668cd
EFFICACY: 77lm/W

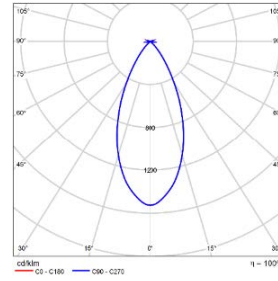

MODEL: ADDT51-LM25A5CCSWT
ANGLE: 50°
POWER: 28W
LUMENS: 1830lm
CBCP: 2794cd
EFFICACY: 65lm/W

VOLTA TUNABLE-MODEL: ADDT61

WAC ARCHITECTURAL

6" Round Narrow Tunable Recessed Downlight


PROJECT:

TYPE:

Product Image



Line Drawing

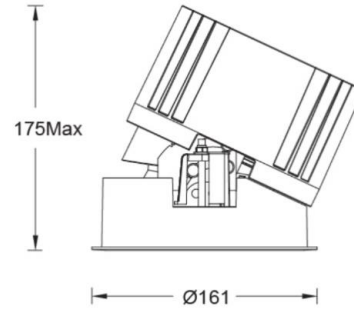

Product Description

VOLTA II series LED round narrow recessed adjustable downlight, streamlined appearance, with precise lens and black mirror reflector design. It guarantees light output while still achieving the ultimate anti-glare effect, and the light source cavity is sealed to minimize the impact of humid environment on its performance. Free to remove and replace the reflector or optical accessories, greatly improving the convenience of the site. Mainly suitable for hotel and commercial indoor places.

Product Features

- **Body Material :** Aluminum alloy die-casting
- **Optical System:** Lens+ Reflector
- **Finish :** Electricity powder coating
- **Adjustable Angle:** Vertical 0-25°
- **Accessories:** As attached
- **Certification:** CCC
- **IP Rating:** IP20 (light source cavity IP44)
- **Insulation Level:** Class II
- **Operating Temperature:** -20°C~40°C

Product Specifications

- **Cut-out:** Ø150mm
- **Ceiling Thickness:** 1mm~30mm
- **Shielding Angle:** 30°
- **LED Type:** COB
- **Source Lm:** 4500lm
- **LED Lifetime:** >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 2700K~6000K Tunable, CRI≥90
- **Input:** 220V AC / 50Hz
- **Dimming:** DALI(must be matched with the project site system in advance)
- **Net Weight:** 1.7Kg without packing

Order model

Model	Size	Trim	LED	Driver	Beam	CCT	Reflector	Finish
ADDT Downlight T series	6 6"	1 Round Trim	LM43 COB 43W	N No Driver A DALI	1 18°	CC 2700K~6000K (Tunable)	B Black S Specular	WT White BK Black
					2 28°			
					3 38°			
					4 48°			
					5 50°			

Example: ADDT61-LM43A2CCSWT

wacarchitectural.com | WAC Architectural, a WAC GROUP brand.

WAC GROUP Headquarters
44 Harbor Park Drive
Port Washington, NY 11050

25 June 2026 | P .5 of 6

WAC GROUP

WAC Group retains the right to modify the design of our products at any time as part of the company's continuous improvement program.

VOLTA TUNABLE-MODEL: ADDT61



WAC ARCHITECTURAL

6" Round Narrow Tunable Recessed Downlight

PROJECT:


TYPE:

Accessory


ALENS-DDT61-BEL Striped glass lenses		ALENS-DDT61-HCL Borderless honeycomb grille	
--	---	---	---

Attention: At most one optical accessory can be added, and it is not included in the factory. It needs to be ordered separately.


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

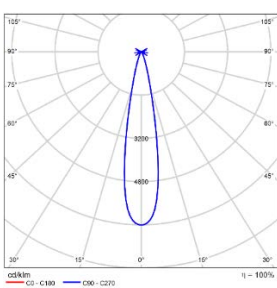


MODEL:	ADDT61-LM43A1CCSWT
ANGLE:	18°
POWER:	47W
LUMENS:	3254lm
CBCP:	20859cd
EFFICACY:	65lm/W

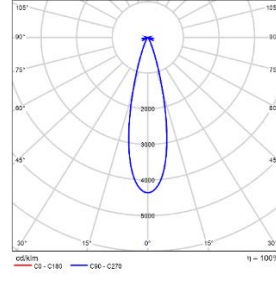

MODEL:	ADDT61-LM43A2CCSWT
ANGLE:	28°
POWER:	47W
LUMENS:	3271lm
CBCP:	14257cd
EFFICACY:	70lm/W

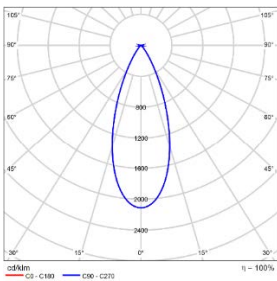

MODEL:	ADDT61-LM43A3CCSWT
ANGLE:	38°
POWER:	47W
LUMENS:	3367lm
CBCP:	7111cd
EFFICACY:	72lm/W

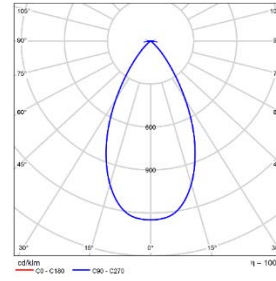

MODEL:	ADDT61-LM43A5CCSWT
ANGLE:	50°
POWER:	47W
LUMENS:	3249lm
CBCP:	4052cd
EFFICACY:	69lm/W