



CUBE
5" Double Wall Mount
DC-WD05 | DC-WD0534

Fixture Type: _____
Project: _____
Catalog#: _____
Location: _____

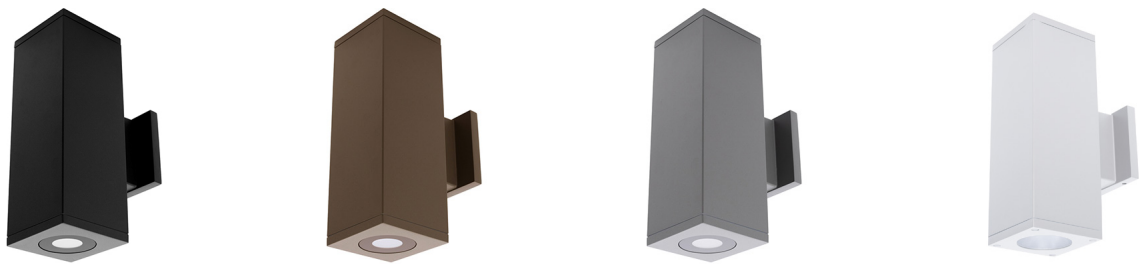

LINE DRAWING

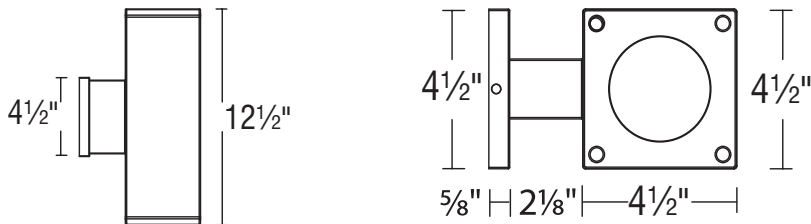

PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cubical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

SPECIFICATIONS

Construction: Durable die-cast aluminum construction
Mounting: Wall mounted

Light Source: High output 3-step Mac Adam Ellipse COB
Rated life of 60,000 hours at L70
Input: Universal 120-277V AC 50/60 Hz
Dimming: Electronic low voltage (ELV) : 100 - 5%
0-10V: 100 - 1%
Maximum Delivered Intensity: Up to 13062 cd (Spot 16°, 4000K, CRI 85)
Maximum Delivered Output: Up to 2470 lm (Flood 33°, 4000K, CRI 85)
Operating Temperature: -13°F to 122°F (-25°C to 50°C)

Standards: IP65 rated, ETL & cETL wet location listed
Title 24 JA8-2016 Compliant
Warranty: 5 year WAC Lighting guaranteed warranty

BEAM ANGLES



S - 16°



N - 25°



F - 33°

FINISHES



Black
BK



Bronze
BZ



Graphite
GH



White
WT

Beam	Beam Angle	Color Temp	CRI	Reference Output ¹ (x2) Lumens	Efficacy (lm/W)	Light Direction
S Spot	16°	927 2700K	90	1825	10050	S Straight
		827 2700K	85	2190	12057	
		930 3000K	90	1895	10427	
		830 3000K	85	2300	12644	
		835 3500K	85	2350	12937	
N Narrow	25°	840 4000K	85	2375	13062	A Away
		927 2700K	90	1810	5280	
		827 2700K	85	2170	6335	
		930 3000K	90	1880	5478	
		830 3000K	85	2275	6643	
F Flood	33°	835 3500K	85	2330	6797	B Towards
		840 4000K	85	2350	6863	
		927 2700K	90	1900	4515	C One each
		827 2700K	85	2280	5417	
		930 3000K	90	1970	4685	
		830 3000K	85	2390	5681	
		835 3500K	85	2445	5812	
		840 4000K	85	2470	5870	

Reference output shows 25W output. Multiply by 0.7 to determine output for 17W combinations.



CUBE
5" Double Wall Mount
DC-WD05 | DC-WD0534

Fixture Type:

Project:

Catalog#:

Location:

ORDERING INFORMATION

CONFIGURATION TABLE				
Model & Size	Beam	Color Temperature & CRI	Light Direction	Housing Finish
DC-WD05 (25W x2) DC-WD0534 (17W x2)	S - 16°	827 - 2700K - 85	S - Straight	BK - BLACK
	N - 25°	830 - 3000K - 85	A - Away	BZ - BRONZE
	F - 33°	835 - 3500K - 85	B - Towards	GH - GRAPHITE
		840 - 4000K - 85	C - One each	WT - WHITE
		927 - 2700K - 90		
		930 - 3000K - 90		

DC-WD05-____-__
Example: DC-WD05-N927A-BK

ORDERING NOTES	
1.	16° and 25° can only be ordered with the Light Direction "S-Straight".
2.	33° beam fixtures can be ordered with the Light Directions "S-Straight", "A-Away", "B-Towards", and "C-One each".

CUBE
5" Double Wall Mount
DC-WD05 | DC-WD0534

Fixture Type:




Project:

Catalog#:

Location:

PERFORMANCE DATA

Polar Candela Distribution Charts
Samples shown with a 25W fixture at 3000K and 90 CRI.

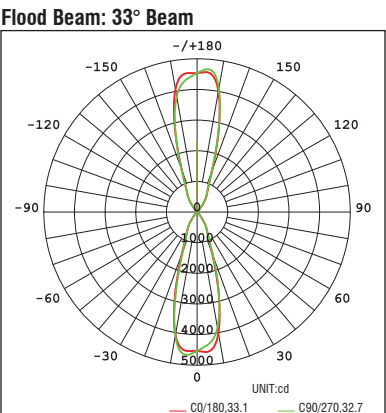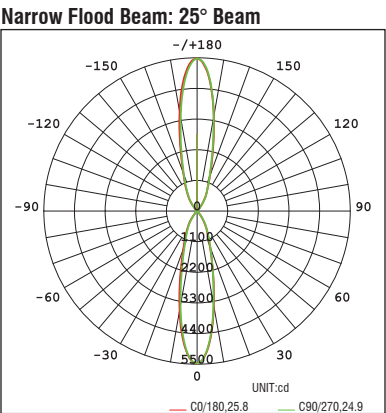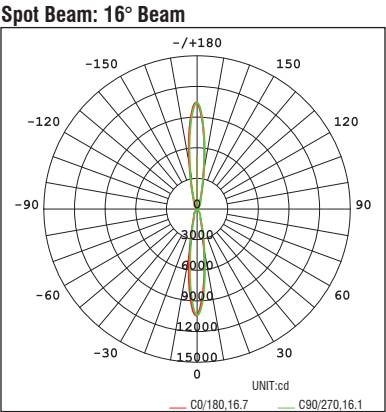

Unified Glare Rating (UGR) Table
General performance of fixtures at 3000K and 90 CRI.

Beam	Angle	UGR Range
Spot	16°	≤ 8
Narrow Flood	25°	≤ 9
Flood	33°	≤ 8