


FQ Color Changing 4" Downlight

R4FRDT | R4FRDL | R4FSDT | R4FSDL

Fixture Type: _____
 Project: _____
 Catalog#: _____
 Location: _____



LINE DRAWING

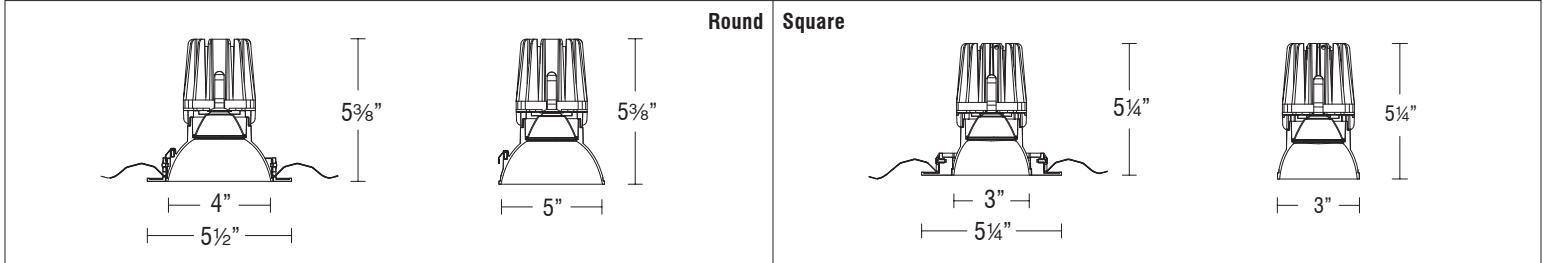

PRODUCT DESCRIPTION

Full Visible Spectrum color-tuning LEDs feature improved efficacy and lumens, as well as refined optical technology that offers human-centric recessed downlighting, catering to the needs of the modern technologist and integrator. Choose any color you can imagine, including the crispest white light or the softest pastel, with the ability to control gradients of saturated colors and a Tunable White CCT range from 1800-6500K.

SPECIFICATIONS

Construction:	Durable die-cast self flanged aluminum construction
Mounting:	Heavy gauge retention clips support trim firmly Ceiling cut out (Round): Trim \varnothing 4 3/4" Trimless \varnothing 4 3/4" Ceiling cut out (Square): Trim 4 3/4" x 4 3/4" Trimless 4 3/4" x 4 3/4" Accommodates 1/2" - 1" ceiling thickness
Light Source:	High output 3-step Mac Adam Ellipse COB Rated life of 50,000 hours at L70
Input:	Universal 120-277V AC, 50/60 Hz
Dimming:	DMX512-A RDM
Maximum Delivered Intensity:	Up to 3,276 cd (Round Narrow Flood 27°, 5000K)
Maximum Delivered Output:	Up to 1,238 lm (Round Narrow Flood 27°, 5000K)
Operating Temperature:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL & cETL Wet location listed
Warranty:	5 year WAC Lighting guaranteed warranty

BEAM ANGLES



FINISHES



Model	Beam	Lumens Ref Output*	CBCP Ref Output*	Color Temp	CRI
R4FRDT Round Trim	N 27°	Round 1105	2925	CC Color Changing	90+
R4FRDL Round Trimless		Square 1085	2820		
R4FSDT Square Trim	F 42°	Round 1030	1620		
R4FSDL Square Trimless		Square 1015	1615		
	W 55°	Round 1080	1490		
		Square 1055	1430		

Lumens and CBCP are reference values for a trim fixture set to 3000K Color Temperature. Refer to Multiplier Table in Performance Data to determine other outputs.



FQ Color Changing

4" Downlight

R4FRDT | R4FRDL | R4FSDT | R4FSDL

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____

ORDERING INFORMATION

CONFIGURATION TABLE		
Model	Color Temperature & CRI	Reflector Finish
R4FRDT	CCX - Color Changing	BK - BLACK
R4FRDL		DB - DARK BRONZE
R4FSDT		HZ - HAZE
R4FSDL		HZWT - HAZE/WHITE
		WT - WHITE

R4FRDT-CCX-__

Example: R4FRDT-CCX-WT

ACCESSORIES	
LENS-16-HCM	<i>Honeycomb Louver</i>
LENS-16P-CRL-BK	<i>Cross Louver</i>
LENS-16AMB	<i>Amber Lens</i>
LENS-16RED	<i>Red Lens</i>
LENS-16BLU	<i>Blue Lens</i>
LENS-16GRN	<i>Green Lens</i>
LENS-16SPR	<i>Spread Lens</i>
LENS-16BEL	<i>Beam Elongating Lens</i>

ORDERING NOTES

1. The "Haze/White" finish is only available on trimmed fixtures (R4FRDT, R4FSDT).
2. The "Haze" finish is only available on trimless fixtures (R4FRDL, R4FSDL).
3. Flood beam (F - 42°) reflector comes pre-installed. All three reflector options (N-27°, F-42°, and W-55°) are included.

FQ Color Changing 4" Downlight

R4FRDT | R4FRDL | R4FSDT | R4FSDL

Fixture Type: _____
 Project: _____
 Catalog#: _____
 Location: _____

ORDERING INFORMATION

Housings	Model	Power	Rating
New Construction Airtight Trimmed Round & Square	R4FBNT-CCX	15W	IC
New Construction Airtight Trimless Round	R4FRNL-CCX	15W	IC
New Construction Airtight Trimless Square	R4FSNL-CCX	15W	IC
New Construction Frame-In Trimmed Round & Square	R4FBFT-CCX	15W	Non-IC
New Construction Frame-In Trimless Round	R4FRFL-CCX	15W	Non-IC
New Construction Frame-In Trimless Square	R4FSFL-CCX	15W	Non-IC
New Construction Frame-In Trimmed Round & Square	R4FBFT-CCX	15W	Non-IC
New Construction Frame-In Trimless Round	R4FRFL-CCX	15W	Non-IC
New Construction Frame-In Trimless Square	R4FSFL-CCX	15W	Non-IC

R4F__-CCX
 Example: R4FBNT-CCX

FQ Color Changing 4" Downlight

R4FRDT | R4FRDL | R4FSDT | R4FSDL

Fixture Type: _____
 Project: _____
 Catalog#: _____
 Location: _____


PERFORMANCE DATA

Polar Candela Distribution Charts

Samples shown from a trimmed fixture set to 3000K.


ROUND

Narrow Flood Beam: 27° Beam

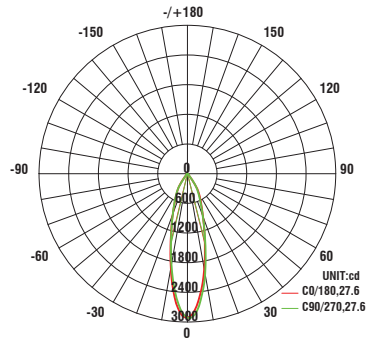


SQUARE


Narrow Flood Beam: 27° Beam

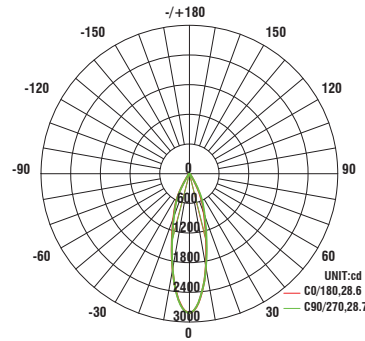


Flood Beam: 42° Beam

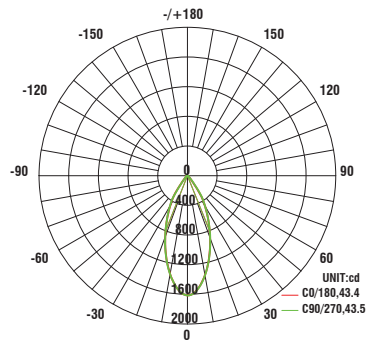


Flood Beam: 42° Beam

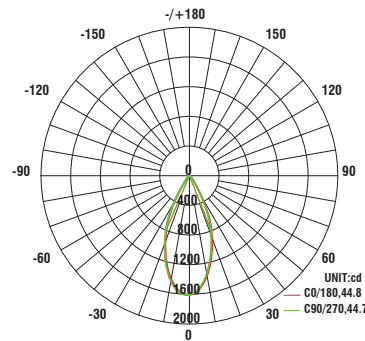

Wide Flood Beam: 55° Beam

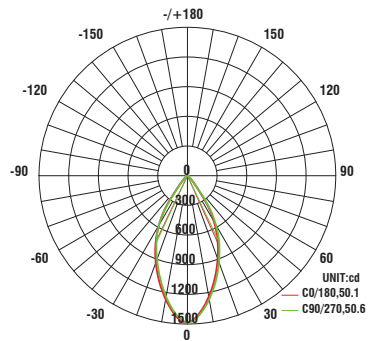

Wide Flood Beam: 55° Beam

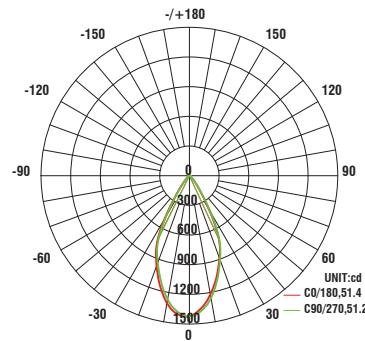

FQ Color Changing

4" Downlight

R4FRDT | R4FRDL | R4FSDT | R4FSDL

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____

PERFORMANCE DATA

Unified Glare Rating (UGR) Table

UGR values shown are calculated using trimmed fixtures set to 3000K.

Round Fixture	Angle	UGR Range
Narrow Flood	27°	≤17
Flood	42°	≤19
Wide Flood	55°	≤19

Square Fixture	Angle	UGR Range
Narrow Flood	27°	≤18
Flood	42°	≤19
Wide Flood	55°	≤19

Lumens and CBCP Multiplier Table

Use the below table to determine lumens and CBCP values for the combinations of power, color temperature, and CRI values.

LUMENS AND CBCP MULTIPLIER								
Housing Wattage	Color Temperature							
	1800K	2200K	2700K	3000K	3500K	4000K	5000K	6500K
15W	0.70	0.86	0.97	1.00	1.04	1.08	1.12	1.10