

Volta

Static White - 2" Shallow Regressed Downlight


R2RD1T | R2SD1T

Fixture Type: _____


Project: _____

Catalog#: _____

Location: _____

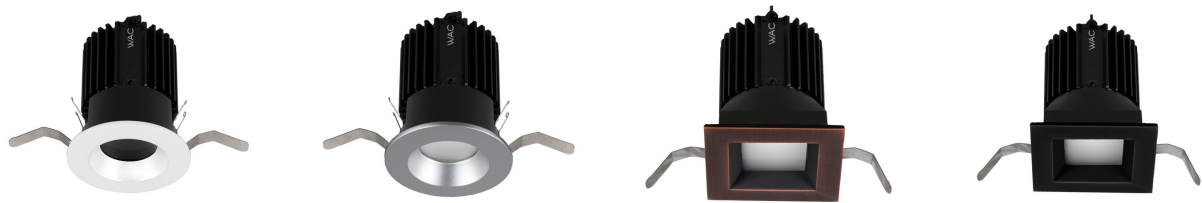

LINE DRAWING



PRODUCT DESCRIPTION

Volta LED downlight series represents an innovation in design and technology for architectural lighting. This high lumen and adaptable family of fixtures with a comprehensive set of round and square fittings, affords a sustainable solution for commercial, corporate, and upscale residential applications.

SPECIFICATIONS

Construction:	Durable die-cast self flanged aluminum construction
Mounting:	Heavy gauge retention clips support trim firmly Ceiling cut out (Round): Trim $\varnothing$ 3 ⁹ / ₁₆ " $\bigcirc$ Trimless $\varnothing$ 4 ¹ / ₄ " $\bigcirc$ Ceiling cut out (Square): Trim 3 ⁹ / ₁₆ " x 3 ⁹ / ₁₆ " $\square$ Trimless 4 ¹ / ₄ " x 4 ¹ / ₄ " $\square$ Accommodates 1/2" - 1 1/2" ceiling thickness
Light Source:	High output 3-step Mac Adam Ellipse COB Rated life of 50,000 hours at L70
Input:	Universal 120-277V AC, 50/60 Hz
Dimming:	0-10V: 100-0% Electronic Low Voltage (ELV): 100-5%
Maximum Delivered Intensity:	Up to 6,575 cd (Round Narrow Flood 25°, 4000K, CRI 85)
Maximum Delivered Output:	Up to 1,584 lm (Square Flood 40°, 4000K, CRI 85)
Standards:	ETL & cETL Wet location listed, Title 24 JA8 Compliant
Warranty:	5 year WAC Lighting guaranteed warranty

BEAM ANGLES



S - 12°



N - 25°



F - 40°



W - 60°

FINISHES



Black
BK



Copper Bronze
CB



Haze
HZ



White
WT



Black White
BKWT



Haze White
HZWT

Model	Beam	Lumens Ref Output*	CBCP	Color Temp	CRI
R2RD1T Round R2SD1T Square	S 12°	Round	395	827 - 2700K	85
		Square	420		
	N 25°	Round	1255	830 - 3000K	85
		Square	1460		
	F 40°	Round	1270	835 - 3500K	85
		Square	1480		
	W 60°	Round	905	840 - 4000K	85
		Square	1020		
			1075	927 - 2700K	90
			1035	930 - 3000K	90

Lumens and CBCP are reference values for 3000K Color Temperature and 85 CRI with 22 housing. Refer to Multiplier Table in Performance Data to determine other outputs.

Volta

Static White - 2" Shallow Regressed Downlight

R2RD1T | R2SD1T

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____

ORDERING INFORMATION

CONFIGURATION TABLE				
Model & Power	Beam	Color Temperature & CRI	Reflector Finish	Trim Finish
R2RD1T R2SD1T	S: Spot - 12°	827 - 2700K - 85	BK - BLACK	WT - WHITE
	N: Narrow Flood - 25°	830 - 3000K - 85	CB - COPPER	
	F: Flood - 40°	835 - 3500K - 85	HZ - HAZE	
	W: Wide Flood - 60°	840 - 4000K - 85	WT - WHITE	
		927 - 2700K - 90		
		930 - 3000K - 90		

R2RD1T-____-__ Example: R2RD1T-N840-WT

HOUSINGS (Required)									
Model		Trim	Power	S	N,F,W	Rating	Driver		Emergency Backup
New Construction Airtight	R2RN (Round)	T <i>Trim</i>	15	<i>10W</i>	<i>15W</i>	<i>IC</i>	DEFAULT	<i>ELV, 0-10V</i>	EM <i>Optional</i>
	R2SN (Square)	L <i>Trimless</i>	22	<i>15W</i>	<i>22W</i>	<i>IC</i>			
New Construction Airtight Chicago Plenum	R2RC (Round)	T <i>Trim</i>	15	<i>10W</i>	<i>15W</i>	<i>IC</i>	DEFAULT	<i>ELV, 0-10V</i>	EM <i>Optional</i>
	R2SC (Square)	L <i>Trimless</i>	22	<i>15W</i>	<i>22W</i>	<i>IC</i>			
Remodel Round or Square	R2BR	T <i>Trim</i>	15	<i>10W</i>	<i>15W</i>	<i>Non-IC</i>	DEFAULT	<i>ELV, 0-10V</i>	N/A
			22	<i>15W</i>	<i>22W</i>	<i>Non-IC</i>			
Remodel	R2RR (Round)	L <i>Trimless</i>	15	<i>15W</i>	<i>15W</i>	<i>Non-IC</i>	DEFAULT	<i>ELV, 0-10V</i>	N/A
	R2SR (Square)		22	<i>22W</i>	<i>22W</i>	<i>Non-IC</i>			

ACCESSORIES			
LENS-16-HLD	<i>Accessory Holder</i>	LENS-16RED	<i>Red Lens</i>
LENS-16HCM	<i>Honeycomb Louver</i>	LENS-16FR	<i>Frosted Lens</i>
LENS-16CRL	<i>Cross Louver</i>	LENS-16SPR	<i>Spread Lens</i>
LENS-16AMB	<i>Amber Lens</i>	LENS-16BEL	<i>Beam Elongating Lens</i>
LENS-16BLU	<i>Blue Lens</i>		
LENS-16GRN	<i>Green Lens</i>		

CEILING ADAPTERS	
R2R-ADP1	<i>Round - ½" to 1" ceiling thickness</i>
R2R-ADP2	<i>Round - 1" to 1½" ceiling thickness</i>
R2S-ADP1	<i>Square - ½" to 1" ceiling thickness</i>
R2S-ADP2	<i>Square - 1" to 1½" ceiling thickness</i>

INTERCHANGEABLE REFLECTORS	
REF-R2-N	<i>Narrow Flood Beam</i>
REF-R2-F	<i>Flood Beam</i>
REF-R2-W	<i>Wide Beam</i>

ORDERING NOTES	
1.	The "White" trim finish is only available with the reflector finishes "Black" and "Haze".
2.	The "Spot - 12°" beam angle is available in 10W and 15W.
3.	The "Narrow Flood - 25°", "Flood - 40°", and "Wide Flood - 60°" beam angles are available in 15W and 22W.

Volta

Static White - 2" Shallow Regressed Downlight

R2RD1T | R2SD1T

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____


PERFORMANCE DATA

Polar Candela Distribution Charts


Samples shown with a 22W fixture set to 3000K and 90 CRI.

ROUND

Spot Beam: 12° Beam

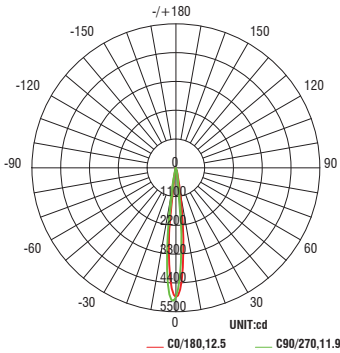


Wide Flood Beam: 60° Beam

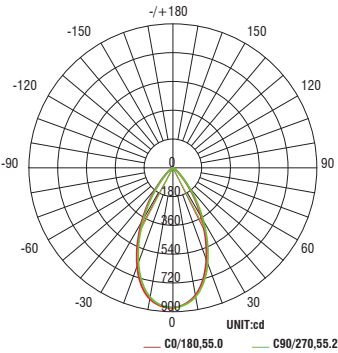


SQUARE


Spot Beam: 12° Beam

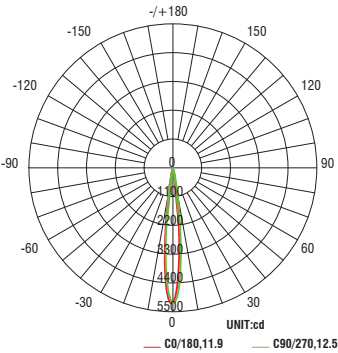


Wide Flood Beam: 60° Beam

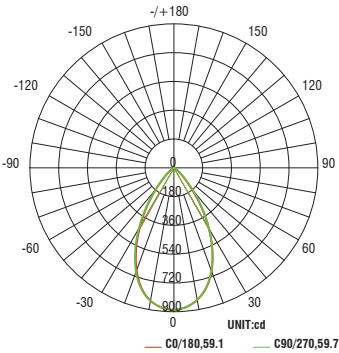


Narrow Flood Beam: 25° Beam

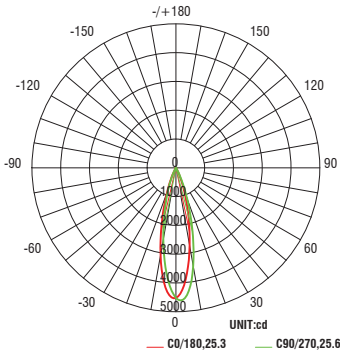


Narrow Flood Beam: 25° Beam

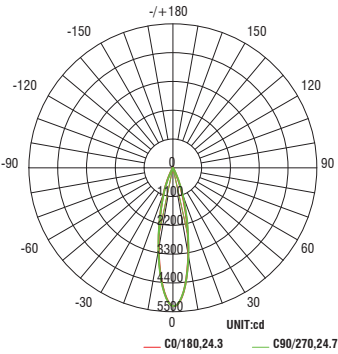

Flood Beam: 40° Beam

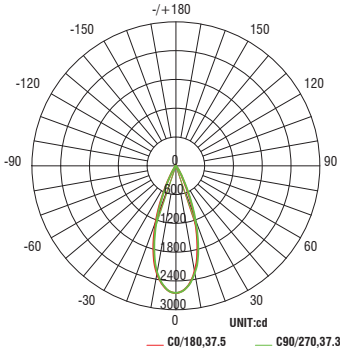

Flood Beam: 40° Beam

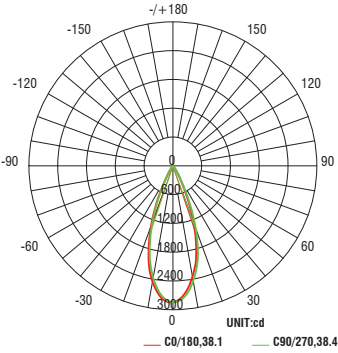

Volta

Static White - 2" Shallow Regressed Downlight

R2RD1T | R2SD1T

Fixture Type:

Project:

Catalog#:

Location:

PERFORMANCE DATA

Unified Glare Rating (UGR) Table

UGR values shown are calculated at 3000K and 90 CRI. General performance of beam angles shown below.

Round Fixture	Angle	UGR Range	Square Fixture	Angle	UGR Range
Spot	12°	≤5	Spot	12°	≤5
Narrow Flood	25°	≤3	Narrow Flood	25°	≤3
Flood	40°	≤6	Flood	40°	≤6
Wide Flood	60°	≤15	Wide Flood	60°	≤16

Lumens and CBCP Multiplier Table

Use the below table to determine lumens and CBCP values for the combinations of power, color temperature, and CRI values.

Multiplier		TRIM					
		827	927	830	930	835	840
HOUSING	22	0.95	0.81	1.00	0.86	1.05	1.07
	15	0.66	0.56	0.69	0.59	0.72	0.74