

Aether 2"

Extreme Shallow IC LED Housing



HR-2LED-H13A | HR-2LED-H13AC

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Catalog#: \_\_\_\_\_

Location: \_\_\_\_\_

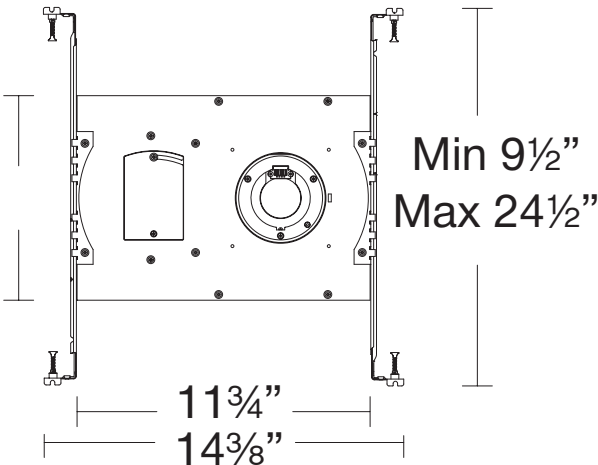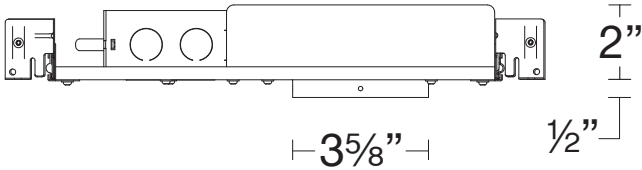

PRODUCT DESCRIPTION

Aether is a next-level downlight, with an extreme-low profile that is designed to fit in tight plenum spaces without compromising lumen output or glare control. Choose from round or square in an array of finishes. With features such as vertical and horizontal adjustment. Aether is suitable for a wide range of applications including residential, commercial, hospitality and architectural.

SPECIFICATIONS

- Construction:** Powder coated die-cast aluminum housing
- Dimming:** ELV, TRIAC, and 0-10V: 100 - 5%
- Input:** 120V - 277V AC
- Power:** 15W, power factor 0.9
- Mounting:** Retention clips firmly hold trim to housing  
Accommodates ceiling thickness of 1/2" - 1"
- Cutout:** Trim: Ø3 3/4"; Trimless: Ø4 1/8"
- Standards:** UL & cUL Listed, IC rated Airtight, Title 24 JA8 Compliant
- Warranty:** 5 year WAC Lighting guaranteed warranty



Aether 2”

Extreme Shallow IC LED Housing

HR-2LED-H13A | HR-2LED-H13AC

Fixture Type:

Project:

Catalog#:

Location:

ORDERING INFORMATION

| HOUSINGS                                         | Model         | Power | Rating |
|--------------------------------------------------|---------------|-------|--------|
| New Construction,<br>Airtight                    | HR-2LED-H13A  | 15W   | IC     |
| New Construction,<br>Airtight,<br>Chicago Plenum | HR-2LED-H13AC | 15W   | IC     |

**HR-2LED-H13\_\_**  
Example: HR-2LED-H13A