



CUBE  
6" Ultra Narrow Double Wall Mount  
DC-WD06-U

Fixture Type: \_\_\_\_\_  
Project: \_\_\_\_\_  
Catalog#: \_\_\_\_\_  
Location: \_\_\_\_\_

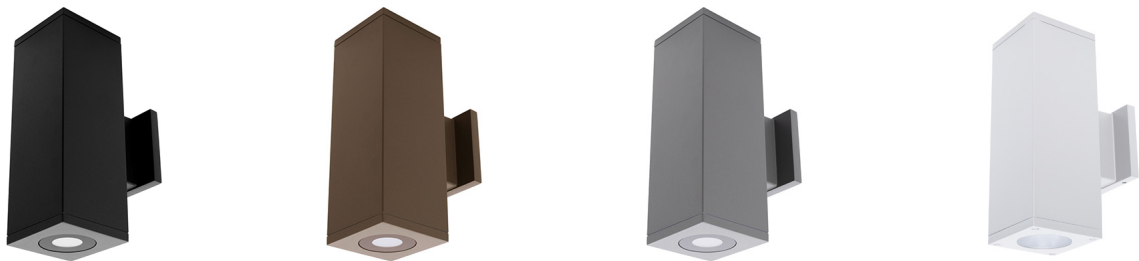

LINE DRAWING

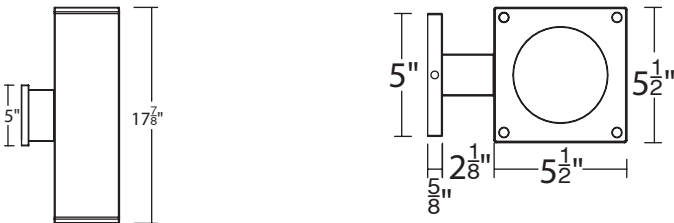

PRODUCT DESCRIPTION

Precise engineering using the latest energy efficient LED technology with a built-in ultra narrow beam precision optics. An appealing cubical profile perfect for accent lighting.

SPECIFICATIONS

|                              |                                                                              |
|------------------------------|------------------------------------------------------------------------------|
| Construction:                | Durable die-cast aluminum construction                                       |
| Mounting:                    | Wall mounted                                                                 |
| Light Source:                | High output 3-step Mac Adam Ellipse COB<br>Rated life of 80,000 hours at L70 |
| Input:                       | Universal 120-277V AC 50/60 Hz                                               |
| Dimming:                     | Electronic low voltage (ELV) : 100 - 10% (120V only)<br>0-10V: 100 - 20%     |
| Maximum Delivered Intensity: | Up to 1462x2 cd (Ultra Narrow 6°, 4000K, CRI 85)                             |
| Maximum Delivered Output:    | Up to 155x2 lm (Ultra Narrow 6°, 4000K, CRI 85)                              |
| Operating Temperature:       | -40°F to 104°F (-40°C to 40°C)                                               |
| Standards:                   | IP65 rated, ETL & cETL wet location listed                                   |
| Warranty:                    | 5 year WAC Lighting guaranteed warranty                                      |

BEAM ANGLES



FINISHES



| Beam              | Beam Angle | Color Temp | CRI   | Reference Lumens | Output x2 <sup>1</sup> CBCP | Light Direction  |
|-------------------|------------|------------|-------|------------------|-----------------------------|------------------|
| U<br>Ultra Narrow | 6°         | 827        | 2700K | 85               | 125                         | B<br>Towards<br> |
|                   |            | 830        | 3000K | 85               | 145                         |                  |
|                   |            | 835        | 3500K | 85               | 150                         |                  |
|                   |            | 840        | 4000K | 85               | 155                         |                  |

CUBE  
6" Ultra Narrow Double Wall Mount  
DC-WD06-U

Fixture Type:

Project:

Catalog#:

Location:

ORDERING INFORMATION

| CONFIGURATION TABLE |        |                         |                 |                |
|---------------------|--------|-------------------------|-----------------|----------------|
| Model & Size        | Beam   | Color Temperature & CRI | Light Direction | Housing Finish |
| DC-WD06 (22W)       | U - 6° | 827 - 2700K - 85        | B - Towards     | BK - BLACK     |
|                     |        | 830 - 3000K - 85        |                 | BZ - BRONZE    |
|                     |        | 835 - 3500K - 85        |                 | GH - GRAPHITE  |
|                     |        | 840 - 4000K - 85        |                 | WT - WHITE     |

DC-WD06-U\_\_ - \_\_  
Example: DC-WD05-U27B-BK

CUBE

6” Ultra Narrow Double Wall Mount

DC-WD06-U

Fixture Type:

Project:

Catalog#:

Location:

FEATURES

|                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Optics:</b> <ul style="list-style-type: none"><li>High lumen output at four different CCT/CRI combinations available</li></ul>                                                                                                                                | <b>Construction:</b> <ul style="list-style-type: none"><li>Solid aluminum construction</li><li>IP65 wet location listed</li><li>Driver concealed within fixture body</li></ul>                                           |
| <b>LED:</b> <ul style="list-style-type: none"><li>High output COB LED with a 3-step Mac Adam ellipse</li><li>Rated operational life of 80,000 hours at L70 (LED maintains 70% of its initial delivered lumens when brand new for 60,000 hours of use.)</li></ul> | <b>Trim and Reflector:</b> <ul style="list-style-type: none"><li>Available in an ultra narrow beam angle (6°) only</li></ul>                                                                                             |
| <b>Electrical:</b> <ul style="list-style-type: none"><li>Available in a 22W power level</li></ul>                                                                                                                                                                | <b>Installation:</b> <ul style="list-style-type: none"><li>Mounting plate secures the fixture to the applicable junction box</li><li>Reflector can be replaced by removing one front panel assembly</li></ul>            |
| <b>Dimming:</b> <ul style="list-style-type: none"><li>Electronic Low Voltage (ELV) and 0-10V dimming are available</li><li>ELV dimming is capable of a 100 - 10% range at 120V only</li><li>0-10V dimming is capable of a 100 - 2-% range</li></ul>              | <b>Warranty:</b> <ul style="list-style-type: none"><li>WAC Architectural limited warranty up to 5 years</li><li>Full warranty found at: <a href="http://waclighting.com/warranty">waclighting.com/warranty</a></li></ul> |
| <b>Notes:</b> <ul style="list-style-type: none"><li>The White, Black, Bronze, and Graphite finishes are all electrostatically powder coated</li></ul>                                                                                                            |                                                                                                                                                                                                                          |

CUBE

6" Ultra Narrow Double Wall Mount

DC-WD06-U

Fixture Type: \_\_\_\_\_  
Project: \_\_\_\_\_  
Catalog#: \_\_\_\_\_  
Location: \_\_\_\_\_

WIRING DIAGRAMS

