



FQ  
4" New Construction Housing and Frame-In Kit

R4FBNT | R4FRNL | R4FSNL | R4FBFT | R4FRFL | R4FSFL

Fixture Type: \_\_\_\_\_  
Project: \_\_\_\_\_  
Catalog#: \_\_\_\_\_  
Location: \_\_\_\_\_

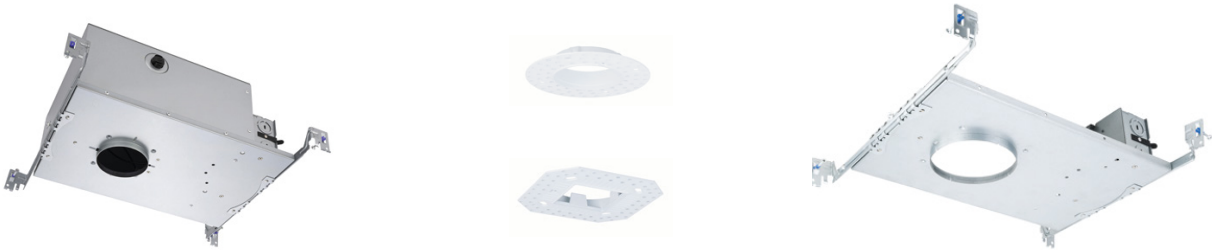

LINE DRAWING

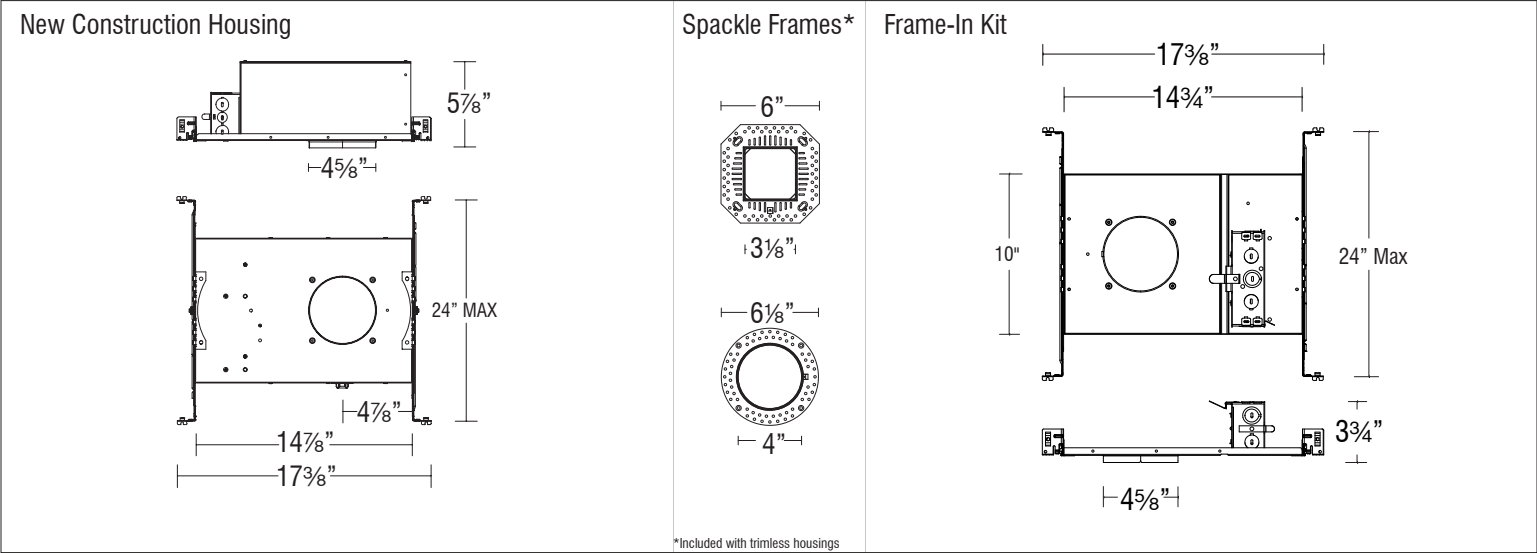

PRODUCT DESCRIPTION

The FQ Recessed series offers a complete line of high performance LED luminaires that provide outstanding functionality and quality. The FQ series features superlative glare control with 30° shielding, 45° vertical tilting, and uniform floor-to-ceiling wall washing. Multiple power level options and a full line of round and square, trimmed and trimless luminaires offer versatile solutions for various lighting applications. Easy to order, install, and service.

SPECIFICATIONS

|            |                                                                                                                                                                                                                 |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mounting:  | New construction housings include universal mounting brackets and hanger bars<br>Ceiling cut out (Round): Ø 4 3/4" ○<br>Ceiling cut out (Square): 4 3/4" x 4 3/4" □<br>Accommodates 1/2" - 1" ceiling thickness |
| Input:     | Universal 120-277V AC, 50/60 Hz                                                                                                                                                                                 |
| Dimming:   | ELV, TRIAC, 0-10V: 100 - 1%                                                                                                                                                                                     |
| Emergency: | EM fixtures provided with integral emergency battery backup with 24" lead wire remote test switch. Provides a minimum of 90 minutes of 6W illumination during emergency operation.                              |
| Standards: | ETL & cETL, IC-rated, Airtight, SPCL (Spray Foam Compatible Luminaire), up to R6.8 per inch, as per UL 1598                                                                                                     |
| Warranty:  | 5 year WAC Lighting guaranteed warranty                                                                                                                                                                         |



Fixture Type:

Project:

Catalog#:

Location:

ORDERING INFORMATION

| HOUSINGS                                               |        |       |         |                   |
|--------------------------------------------------------|--------|-------|---------|-------------------|
|                                                        | Model  | Power | Rating  | Emergency Backup* |
| New Construction<br>Airtight Trimmed<br>Round & Square | R4FBNT | 1 13W | IC,SPCL | EM Optional       |
|                                                        |        | 2 19W | IC,SPCL |                   |
|                                                        |        | 3 25W | IC,SPCL |                   |
|                                                        |        | 4 28W | Non-IC  |                   |
| New Construction<br>Airtight Trimless<br>Round         | R4FRNL | 1 13W | IC,SPCL | EM Optional       |
|                                                        |        | 2 19W | IC,SPCL |                   |
|                                                        |        | 3 25W | IC,SPCL |                   |
|                                                        |        | 4 28W | Non-IC  |                   |
| New Construction<br>Airtight Trimless<br>Square        | R4FSNL | 1 13W | IC,SPCL | EM Optional       |
|                                                        |        | 2 19W | IC,SPCL |                   |
|                                                        |        | 3 25W | IC,SPCL |                   |
|                                                        |        | 4 28W | Non-IC  |                   |
| New Construction<br>Frame-In Trimmed<br>Round & Square | R4FBFT | 1 13W | Non-IC  | N/A               |
|                                                        |        | 2 19W | Non-IC  |                   |
|                                                        |        | 3 25W | Non-IC  |                   |
|                                                        |        | 4 28W | Non-IC  |                   |
| New Construction<br>Frame-In Trimless<br>Round         | R4FRFL | 1 13W | Non-IC  | N/A               |
|                                                        |        | 2 19W | Non-IC  |                   |
|                                                        |        | 3 25W | Non-IC  |                   |
|                                                        |        | 4 28W | Non-IC  |                   |
| New Construction<br>Frame-In Trimless<br>Square        | R4FSFL | 1 13W | Non-IC  | N/A               |
|                                                        |        | 2 19W | Non-IC  |                   |
|                                                        |        | 3 25W | Non-IC  |                   |
|                                                        |        | 4 28W | Non-IC  |                   |

R4F \_ \_ - \_ \_

Example: R4FBNT-1 or R4FBNT-1-EM (with Emergency backup battery)

\*EM option is not SPCL rated

| Housing Model | Power | Emergency Backup | Replacement Driver Model |
|---------------|-------|------------------|--------------------------|
| R4FBNT        | 1 13W | None             | D-R4FN-1                 |
| R4FRNL        | 2 19W |                  | D-R4FN-2                 |
| R4FSNL        | 3 25W |                  | D-R4FN-3                 |
|               | 4 28W |                  | D-R4FN-4                 |
| R4FBFT        | 1 13W | None             | D-R4FF-1                 |
| R4FRFL        | 2 19W |                  | D-R4FF-2                 |
| R4FSFL        | 3 25W |                  | D-R4FF-3                 |
|               | 4 28W |                  | D-R4FF-4                 |
| R4FBNT        | 1 13W | EM               | D-R4FN-1-EM              |
| R4FBNT        | 2 19W |                  | D-R4FN-2-EM              |
| R4FBFT        | 3 25W |                  | D-R4FN-3-EM              |
|               | 4 28W |                  | D-R4FN-4-EM              |