


FQ Tunable White


4" New Construction Housing

R4FBNT-TW | R4FRNL-TW | R4FSNL-TW

Fixture Type: _____
 Project: _____
 Catalog#: _____
 Location: _____

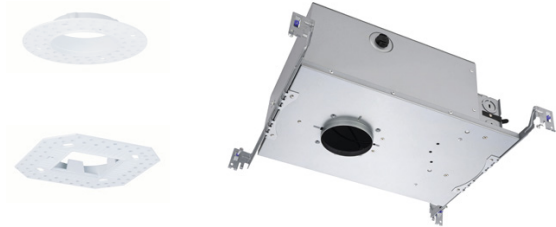

LINE DRAWING

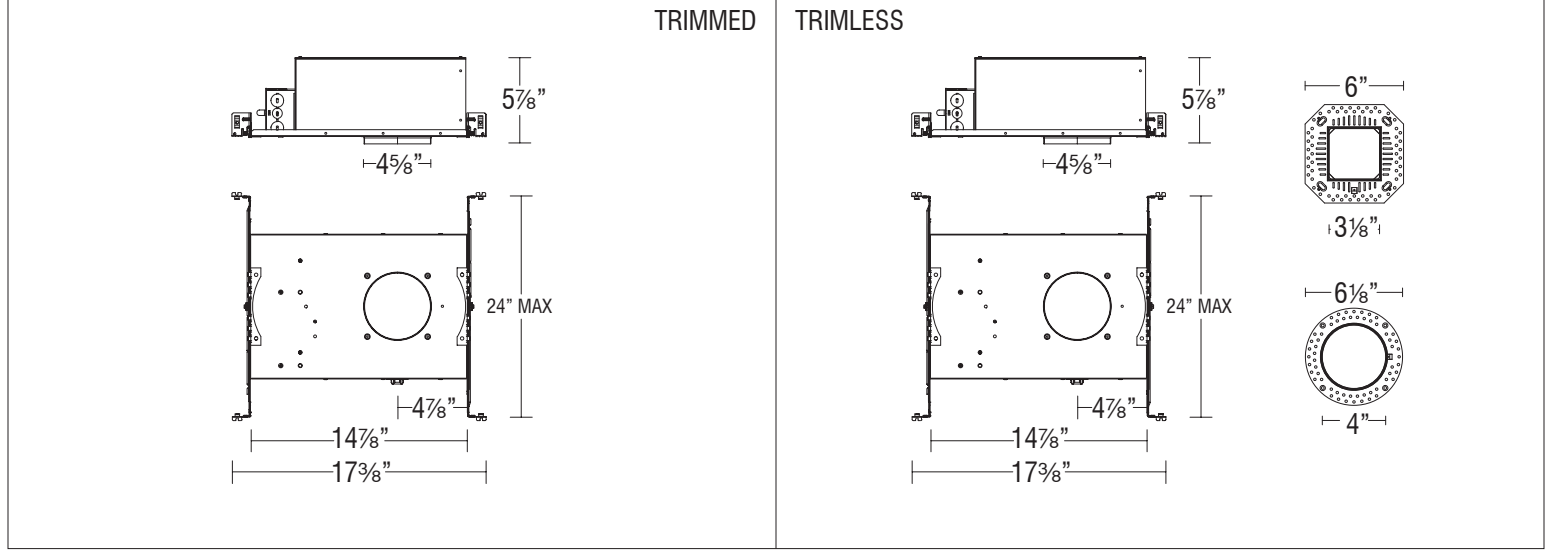

PRODUCT DESCRIPTION
 FQ (Function + Quality) Experience simplicity and versatility with FQ 2" recessed luminaires. The fixtures merge modern design with world-class performance to achieve the ultimate in function and flexibility. Enjoy the benefits of two fixtures in one with Tunable White 1800-4000K and Dim-to-Warm 3000K-1800K features built into each luminaire, allowing you to customize the best light to illuminate dining areas, great rooms, primary bedrooms, kitchens, and baths on the fly. Deep regressed light sources deliver a glare-free, quiet ceiling aesthetic for a clean architectural look while providing a robust output from a diminutive source.

SPECIFICATIONS

Mounting: Universal mounting brackets and hanger bars
 Ceiling cut out (Round): $\varnothing 4\frac{3}{4}"$
 Ceiling cut out (Square): $4\frac{3}{4}" \times 4\frac{3}{4}"$
 Accommodates $\frac{1}{2}" - 1\frac{1}{4}"$ ceiling thickness

Input: Universal 120-277V AC, 50/60 Hz

Dimming: 2 Channel 0-10V: 100-0.1%
 2 Channel DMX512-A with RDM: 100-0.1%

Standards: ETL & cETL, Chicago Plenum, IC-rated, Airtight (see list)

Warranty: 5 year WAC Lighting guaranteed warranty



FQ Tunable White
4" New Construction Housing
R4FBNT-TW | R4FRNL-TW | R4FSNL-TW

Fixture Type: _____
Project: _____
Catalog#: _____
Location: _____

ORDERING INFORMATION

HOUSINGS				
	Model	Power	Rating	
New Construction Trim - Airtight	R4FBNT-TW (Round & Square)	1 14W	IC	
		2 19W	IC	
		3 26W	IC	
New Construction Trimless - Airtight	R4FRNL-TW (Round) R4FSNL-TW (Square) Spackle frame included	1 14W	IC	
		2 19W	IC	
		3 26W	IC	

Housing Model	Power	Replacement Driver Model
R4FBNT-TW	1 14W	D-R4FN-TW-1
R4FRNL-TW	2 19W	D-R4FN-TW-2
R4FSNL-TW	3 26W	D-R4FN-TW-3