

Volta

Static White - 2" Pinhole

R2RPT | R2SPT

Fixture Type: _____


Project: _____

Catalog#: _____

Location: _____



LINE DRAWING



PRODUCT DESCRIPTION

Volta LED downlight series represents an innovation in design and technology for architectural lighting. This high lumen and adaptable family of fixtures with a comprehensive set of round and square fittings, affords a sustainable solution for commercial, corporate, and upscale residential applications. The Pinhole Volta fixtures are capable of adjusting 0-30° vertically and 365° horizontally with locking positions.


SPECIFICATIONS

Construction:	Durable die-cast self flanged aluminum construction
Mounting:	Heavy gauge retention clips support trim firmly Ceiling cut out (Round): Trim $\varnothing 3\frac{9}{16}"$ $\bigcirc$ Trimless $\varnothing 4\frac{1}{4}"$ $\bigcirc$ Ceiling cut out (Square): Trim $3\frac{9}{16}" \times 3\frac{9}{16}"$ $\square$ Trimless $4\frac{1}{4}" \times 4\frac{1}{4}"$ $\square$ Accommodates $\frac{1}{2}"$ - $1\frac{1}{2}"$ ceiling thickness
Light Source:	High output 3-step Mac Adam Ellipse COB Rated life of 50,000 hours at L70
Input:	Universal 120-277V AC, 50/60 Hz
Dimming:	0-10V: 100-0% Electronic Low Voltage (ELV): 100-5%
Maximum Delivered Intensity:	Up to 5,714 cd (Square Narrow Flood 20°, 4000K, CRI 85)
Maximum Delivered Output:	Up to 770 lm (Square Narrow Flood 20°, 4000K, CRI 85)
Standards:	ETL & cETL Wet location listed
Warranty:	5 year WAC Lighting guaranteed warranty

BEAM ANGLES



FINISHES



Model	Beam	Lumens Ref Output*	CBCP	Color Temp	CRI
R2RPT R2SPT	S 12°	Round	235	827 - 2700K	85
		Square	285	830 - 3000K	85
				835 - 3500K	85
	N 20°	Round	555	840 - 4000K	85
		Square	720	927 - 2700K	90
				930 - 3000K	90

Lumens and CBCP are reference values for 3000K Color Temperature and 85 CRI with 22 housing. Refer to Multiplier Table in Performance Data to determine other outputs.



Volta

Static White - 2" Pinhole

R2RPT | R2SPT

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____

ORDERING INFORMATION

CONFIGURATION TABLE				
Model & Power	Beam	Color Temperature & CRI	Reflector Finish	Trim Finish
R2RPT R2SPT	S: Spot - 12°	827 - 2700K - 85	BK - BLACK	-
	N: Narrow Flood - 20°	830 - 3000K - 85	CB - COPPER	
		835 - 3500K - 85	HZ - HAZE	
		840 - 4000K - 85	WT - WHITE	
		927 - 2700K - 90		
		930 - 3000K - 90		

R2RPT-____-__ Example: R2RPT-N840-WT

HOUSINGS (Required)									
Model		Trim	Power	S	N,F,W	Rating	Driver		Emergency Backup
New Construction Airtight	R2RN (Round)	T <i>Trim</i>	15	<i>10W</i>	<i>15W</i>	<i>IC</i>	DEFAULT	<i>ELV, 0-10V</i>	EM <i>Optional</i>
	R2SN (Square)	L <i>Trimless</i>	22	<i>15W</i>	<i>22W</i>	<i>IC</i>			
New Construction Airtight Chicago Plenum	R2RC (Round)	T <i>Trim</i>	15	<i>10W</i>	<i>15W</i>	<i>IC</i>	DEFAULT	<i>ELV, 0-10V</i>	EM <i>Optional</i>
	R2SC (Square)	L <i>Trimless</i>	22	<i>15W</i>	<i>22W</i>	<i>IC</i>			
Remodel Round or Square	R2BR	T <i>Trim</i>	15	<i>10W</i>	<i>15W</i>	<i>Non-IC</i>	DEFAULT	<i>ELV, 0-10V</i>	N/A
			22	<i>15W</i>	<i>22W</i>	<i>Non-IC</i>			
Remodel	R2RR (Round)	L <i>Trimless</i>	15	<i>15W</i>	<i>15W</i>	<i>Non-IC</i>	DEFAULT	<i>ELV, 0-10V</i>	N/A
	R2SR (Square)		22	<i>22W</i>	<i>22W</i>	<i>Non-IC</i>			

ACCESSORIES			
LENS-16-HLD	<i>Accessory Holder</i>	LENS-16RED	<i>Red Lens</i>
LENS-16HCM	<i>Honeycomb Louver</i>	LENS-16FR	<i>Frosted Lens</i>
LENS-16CRL	<i>Cross Louver</i>	LENS-16SPR	<i>Spread Lens</i>
LENS-16AMB	<i>Amber Lens</i>	LENS-16BEL	<i>Beam Elongating Lens</i>
LENS-16BLU	<i>Blue Lens</i>		
LENS-16GRN	<i>Green Lens</i>		

CEILING ADAPTERS	
R2R-ADP1	<i>Round - ½" to 1" ceiling thickness</i>
R2R-ADP2	<i>Round - 1" to 1½" ceiling thickness</i>
R2S-ADP1	<i>Square - ½" to 1" ceiling thickness</i>
R2S-ADP2	<i>Square - 1" to 1½" ceiling thickness</i>

INTERCHANGEABLE REFLECTORS	
REF-R2-N	<i>Narrow Flood Beam</i>
REF-R2-F	<i>Flood Beam</i>
REF-R2-W	<i>Wide Beam</i>

ORDERING NOTES	
1.	The "White" trim finish is only available with the reflector finishes "Black" and "Haze".
2.	The "Spot - 12°" beam angle is available in 10W and 15W.
3.	The "Narrow Flood - 25°" beam angle is available in 15W and 22W.

Volta

Static White - 2" Pinhole

R2RPT | R2SPT

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____

FEATURES


Optics: • 2" lens regress for superior glare control • Field selectable light engine height for cut-off angle adjustment (30°-34°) and accessory use	Construction: • Durable die-cast self flanged aluminum construction • Heavy gauge retention clips support trim firmly
LED: • High output COB LED with a 3-step Mac Adam ellipse • Rated operational life of 50,000 hours at L70 (LED maintains 70% of its initial delivered lumens when brand new for 50,000 hours of use.)	Trim and Reflector: • Integral patterned tempered trim lens included standard with every fixture • Dual finished fixtures are a single piece with no physical seams
Electrical: • Volta is compatible with 120-277 VAC, 50/60 Hz • Housings are available in 10W and 15W if using a Spot Beam. If using a Narrow, Flood, or Wide beam, the housings are available in 15W and 22W.	Installation: • Requires housing for installation • New Construction housings for Volta 2" Static White are IC rated. • Remodel housings for Volta 2" Static White are non-IC rated.
Dimming: • Electronic Low Voltage (ELV) dimming is capable of a 100 - 5% range • 0-10V dimming is capable of a 100 - 0% range	Warranty: • WAC Architectural limited warranty up to 5 years • Full warranty found at: waclighting.com/warranty
Notes: • Trim and trimless fixtures of the same shape (Round/Square) have the same performance. Minor variations occur due to fixture shape. • The White and Black finishes are powder coated while the Haze is enamel coated and the Copper Bronze is plated and brushed. • The Volta product family is compatible with a wide range of accessories.	

PERFORMANCE DATA

Polar Candela Distribution Charts
Samples shown with 3000K and 90 CRI.


ROUND

Spot Beam: 12° Beam

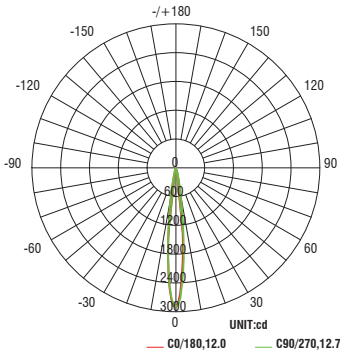


SQUARE


Spot Beam: 12° Beam

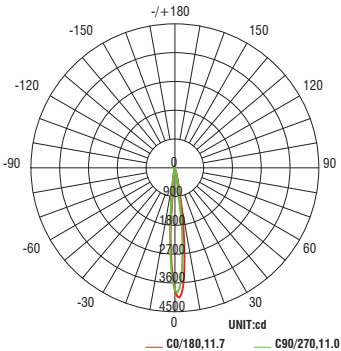

Narrow Flood Beam: 20° Beam

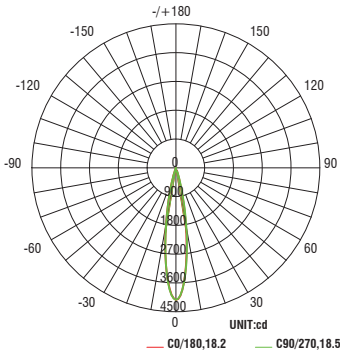

Narrow Flood Beam: 20° Beam

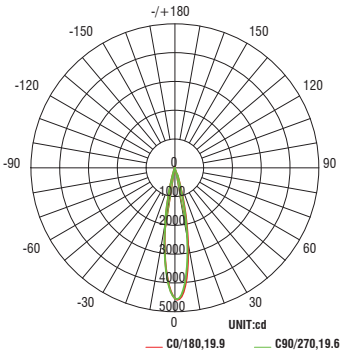

Volta
Static White - 2" Pinhole
R2RPT | R2SPT

Fixture Type:

Project:

Catalog#:

Location:

PERFORMANCE DATA

Unified Glare Rating (UGR) Table

UGR values shown are calculated at 3000K and 90 CRI. General performance of beam angles shown below.

Round Fixture	Angle	UGR Range	Square Fixture	Angle	UGR Range
Spot	12°	≤0	Spot	12°	≤0
Narrow Flood	20°	≤0	Narrow Flood	20°	≤0

Lumens and CBCP Multiplier Table

Use the below table to determine lumens and CBCP values for the combinations of power, color temperature, and CRI values.

Multiplier		TRIM					
		827	927	830	930	835	840
HOUSING	22	0.95	0.81	1.00	0.86	1.05	1.07
	15	0.66	0.56	0.69	0.59	0.72	0.74

Volta

Static White - 2" Pinhole

R2RPT | R2SPT

Fixture Type: _____


Project: _____

Catalog#: _____


Location: _____

DIMENSIONAL DIAGRAMS

Round Trim (R2RPT)

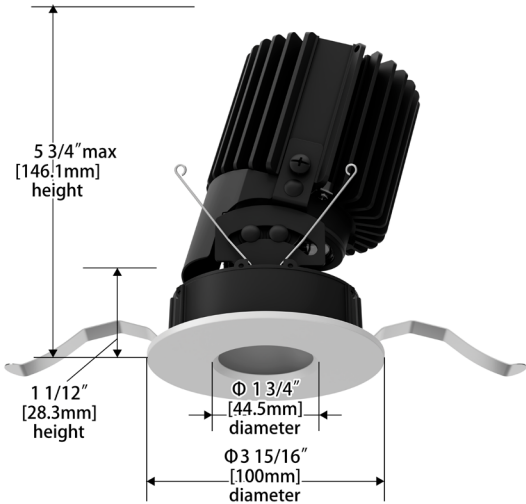

Square Trim (R2SPT)

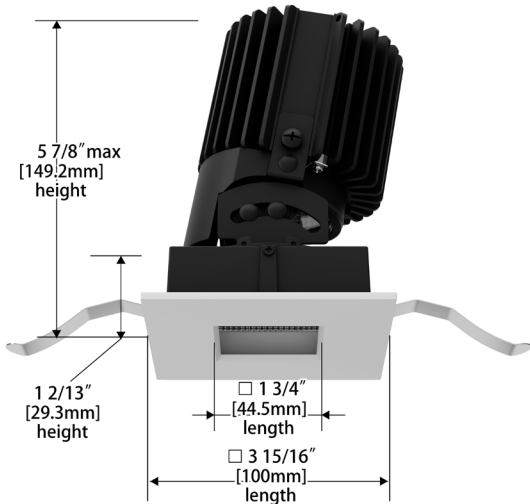


Volta
Static White - 2" Pinhole
R2RPT | R2SPT


Fixture Type: _____
Project: _____
Catalog#: _____
Location: _____

DIMENSIONAL DIAGRAMS

New Construction - Round Trim

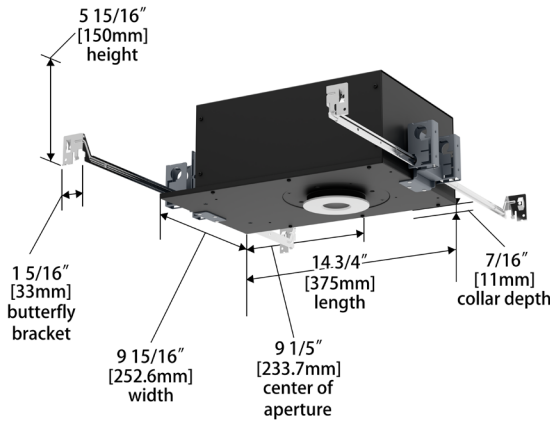


New Construction - Square Trim

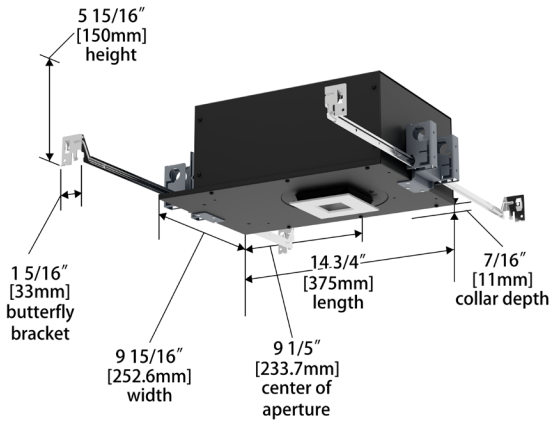

Fixture Type: _____
Project: _____
Catalog#: _____
Location: _____

WIRING DIAGRAMS

Remodel Installation

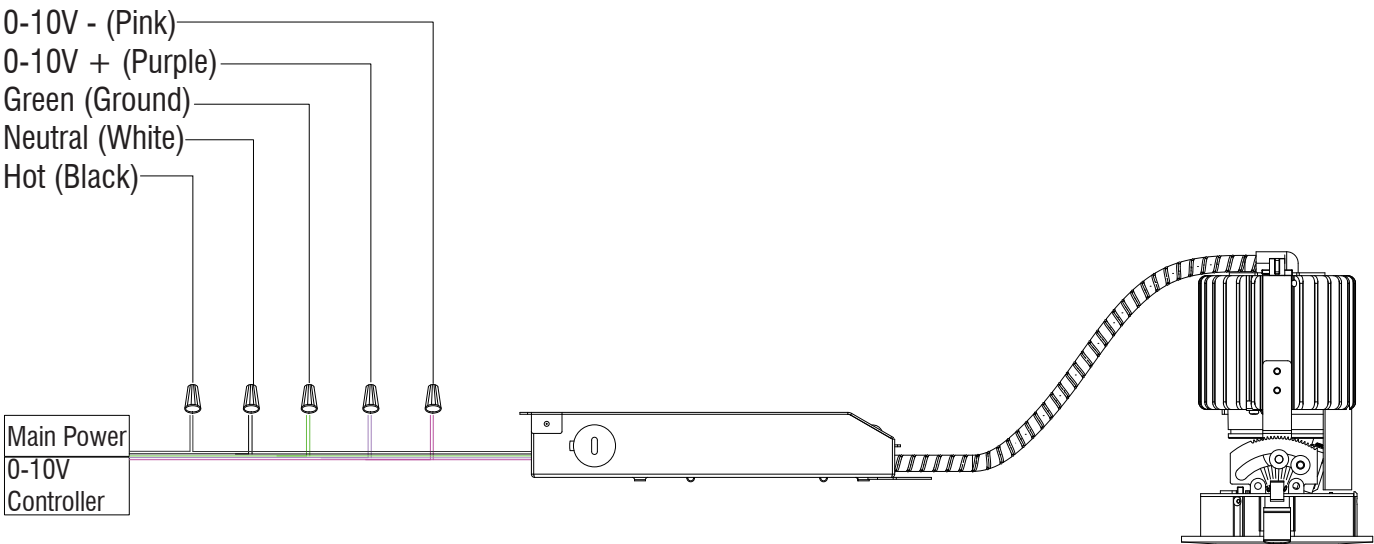

New Construction Installation

