

Volta

Static White - 2" Wall Wash

R2RWT | R2SWT

Fixture Type: _____



Project: _____

Catalog#: _____

Location: _____



LINE DRAWING



PRODUCT DESCRIPTION

Volta LED downlight series represents an innovation in design and technology for architectural lighting. This high lumen and adaptable family of fixtures with a comprehensive set of round and square fittings, affords a sustainable solution for commercial, corporate, and upscale residential applications. Wall Wash Volta fixtures are equipped with an innovative bidirectional spread lens.

SPECIFICATIONS

Construction:	Durable die-cast self flanged aluminum construction
Mounting:	Heavy gauge retention clips support trim firmly Ceiling cut out (Round): Trim $\varnothing 3\frac{9}{16}"$ Trimless $\varnothing 4\frac{1}{4}"$ Ceiling cut out (Square): Trim $3\frac{9}{16}" \times 3\frac{9}{16}"$ Trimless $4\frac{1}{4}" \times 4\frac{1}{4}"$ Accommodates $\frac{1}{2}"$ - $1"$ ceiling thickness
Light Source:	High output 3-step Mac Adam Ellipse COB Rated life of 50,000 hours at L70
Input:	Universal 120-277V AC, 50/60 Hz
Dimming:	0-10V: 100-0% Electronic Low Voltage (ELV): 100-5%
Maximum Delivered Intensity:	Up to 717 cd (Round Asymmetric, 4000K, CRI 85)
Maximum Delivered Output:	Up to 1,091 lm (Round Asymmetric, 4000K, CRI 85)
Standards:	ETL & cETL Wet location listed
Warranty:	5 year WAC Lighting guaranteed warranty

BEAM ANGLES



FINISHES



Model	Beam	Lumens Ref Output*	CBCP	Color Temp	CRI
R2RWT R2SWT	Round Square	A Asym Round Square	1020 940	670 655	827 - 2700K 85
					830 - 3000K 85
					835 - 3500K 85
					840 - 4000K 85
					927 - 2700K 90
					930 - 3000K 90

Lumens and CBCP are reference values for 3000K Color Temperature and 85 CRI with 22 housing. Refer to Multiplier Table in Performance Data to determine other outputs.



Volta

Static White - 2" Wall Wash

R2RWT | R2SWT

Fixture Type:

Project:

Catalog#:

Location:

ORDERING INFORMATION

CONFIGURATION TABLE				
Model & Power	Beam	Color Temperature & CRI	Reflector Finish	Trim Finish
R2RWT R2SWT	A - Asym	827 - 2700K - 85	BK - BLACK	WT - WHITE
		830 - 3000K - 85	CB - COPPER	
		835 - 3500K - 85	HZ - HAZE	
		840 - 4000K - 85	WT - WHITE	
		927 - 2700K - 90		
		930 - 3000K - 90		

R2RWT-____-__ Example: R2RWT-N840-WT

HOUSINGS (Required)									
	Model	Trim	Power	S	N,F,W	Rating	Driver		Emergency Backup
New Construction Airtight	R2RN (Round)	T Trim	15	10W	15W	IC	DEFAULT	ELV, 0-10V	EM Optional
	R2SN (Square)	L Trimless	22	15W	22W	IC			
New Construction Airtight Chicago Plenum	R2RC (Round)	T Trim	15	10W	15W	IC	DEFAULT	ELV, 0-10V	EM Optional
	R2SC(Square)	L Trimless	22	15W	22W	IC			
Remodel Round or Square	R2BR	T Trim	15	10W	15W	Non-IC	DEFAULT	ELV, 0-10V	N/A
			22	15W	22W	Non-IC			
Remodel	R2RR (Round)	L Trimless	15	15W	15W	Non-IC	DEFAULT	ELV, 0-10V	N/A
	R2SR (Square)		22	22W	22W	Non-IC			

CEILING ADAPTERS	
R2R-ADP1	Round - ½" to 1" ceiling thickness
R2S-ADP1	Square - ½" to 1" ceiling thickness

ORDERING NOTES	
1.	The "White" trim finish is only available with the reflector finishes "Black" and "Haze".
2.	The "A - Asym" beam angle is available in 15W and 22W.

Volta

Static White - 2" Wall Wash

R2RWT | R2SWT

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____

FEATURES

Optics: • 2" lens regress for superior glare control • Field selectable light engine height for cut-off angle adjustment (30°-34°) and accessory use	Construction: • Durable die-cast self flanged aluminum construction • Heavy gauge retention clips support trim firmly
LED: • High output COB LED with a 3-step Mac Adam ellipse • Rated operational life of 50,000 hours at L70 (LED maintains 70% of its initial delivered lumens when brand new for 50,000 hours of use.)	Trim and Reflector: • Integral patterned tempered trim lens included standard with every fixture • Dual finished fixtures are a single piece with no physical seams
Electrical: • Volta is compatible with 120-277 VAC, 50/60 Hz • Housings are available in 10W and 15W if using a Spot Beam. If using a Narrow, Flood, or Wide beam, the housings are available in 15W and 22W.	Installation: • Requires housing for installation • New Construction housings for Volta 2" Static White are IC rated. • Remodel housings for Volta 2" Static White are non-IC rated.
Dimming: • Electronic Low Voltage (ELV) dimming is capable of a 100 - 5% range • 0-10V dimming is capable of a 100 - 0% range	Warranty: • WAC Architectural limited warranty up to 5 years • Full warranty found at: waclighting.com/warranty
Notes: • Trim and trimless fixtures of the same shape (Round/Square) have the same performance. Minor variations occur due to fixture shape. • The White and Black finishes are powder coated while the Haze is enamel coated and the Copper Bronze is plated and brushed. • The Volta product family is compatible with a wide range of accessories.	

Volta

Static White - 2" Wall Wash

R2RWT | R2SWT

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____


PERFORMANCE DATA

Polar Candela Distribution Charts

Samples shown with a 22W fixture set to 3000K and 90 CRI.


ROUND

Asymmetric Beam

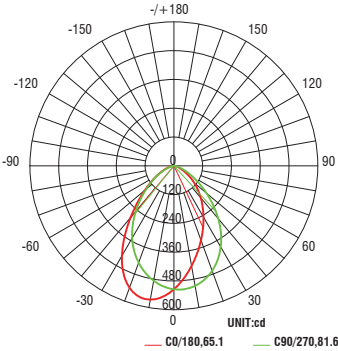

SQUARE

Asymmetric Beam

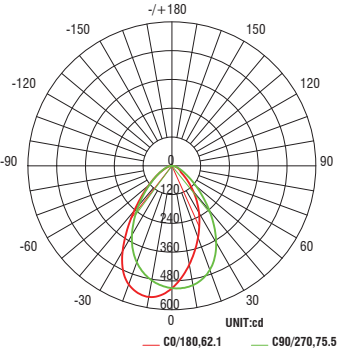

Volta

Static White - 2" Wall Wash

R2RWT | R2SWT

Fixture Type:

Project:

Catalog#:

Location:

PERFORMANCE DATA

Unified Glare Rating (UGR) Table

UGR values shown are calculated at 3000K and 90 CRI. General performance of beam angles shown below.

Round Fixture	Angle	UGR Range	Square Fixture	Angle	UGR Range
Asym	-	≤22	Asym	-	≤22

Lumens and CBCP Multiplier Table

Use the below table to determine lumens and CBCP values for the combinations of power, color temperature, and CRI values.

Multiplier		TRIM					
		827	927	830	930	835	840
HOUSING	22	0.95	0.81	1.00	0.86	1.05	1.07
	15	0.66	0.56	0.69	0.59	0.72	0.74

Volta
Static White - 2" Wall Wash
R2RWT | R2SWT


Fixture Type: _____
Project: _____
Catalog#: _____
Location: _____

DIMENSIONAL DIAGRAMS

Round Trim (R2RWT)



Square Trim (R2SWT)

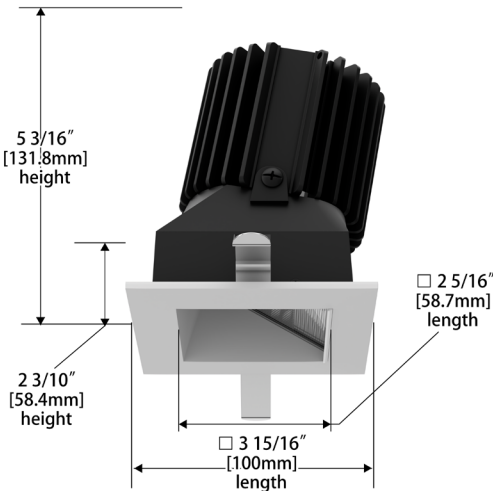


Volta
Static White - 2" Wall Wash
R2RWT | R2SWT


Fixture Type: _____
Project: _____
Catalog#: _____
Location: _____

DIMENSIONAL DIAGRAMS

New Construction - Round Trim

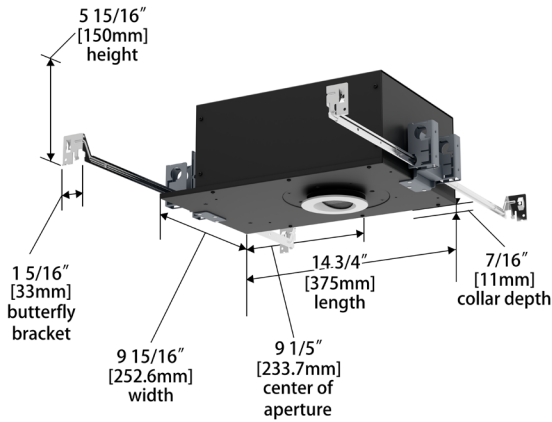

New Construction - Square Trim

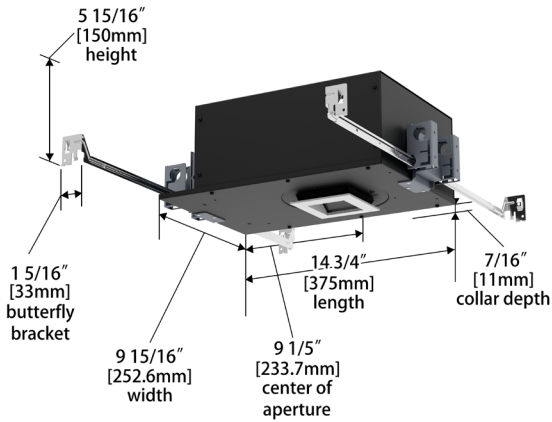

Volta

Static White - 2" Wall Wash

R2RWT | R2SWT

Fixture Type: _____


Project: _____

Catalog#: _____

Location: _____

WIRING DIAGRAMS

Remodel Installation

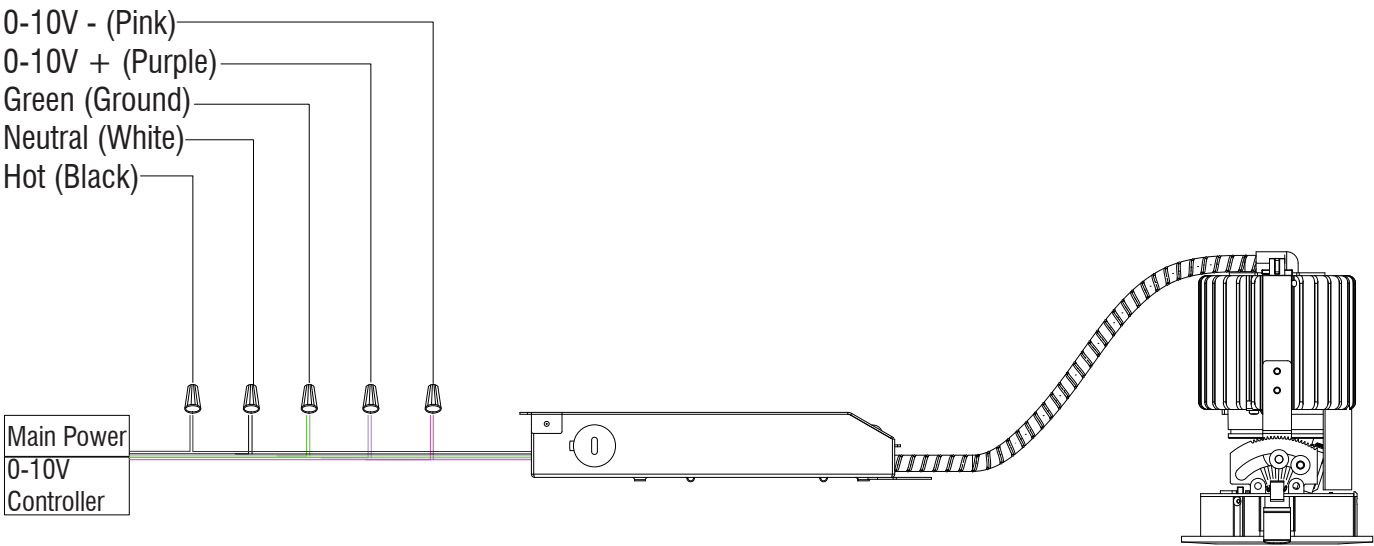

New Construction Installation

