

Swallow III
High Power COB


WTK-41H | WHK-41H | MO-N41H | MO-R41H

Fixture Type: _____
Project: _____
Catalog#: _____
Location: _____




LINE DRAWING


Track Mounted (WTK, WHK)

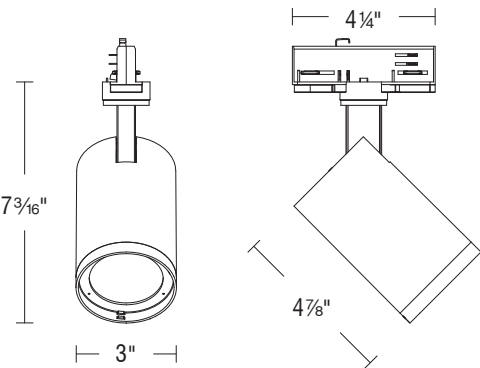

New Construction
(MO-N41H)

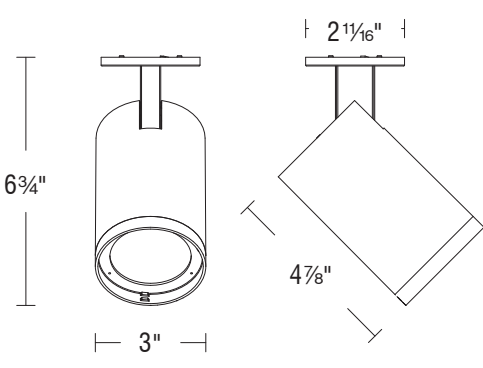

Remodel
(MO-R41H)

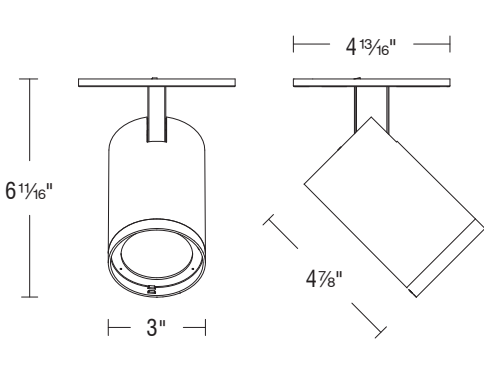

PRODUCT DESCRIPTION

Designed for W two-circuit track systems, the Swallow III features a sleek, refined appearance with a die-cast aluminum housing and a concealed heat sink for a clean, modern look. It utilizes a high-performance COB LED module, offering multiple standard CCT options and excellent color rendering. A variety of beam angles are available, and interchangeable accessories can be easily replaced by hand to create different lighting effects.

SPECIFICATIONS

Construction:	Die-cast aluminum alloy body
Mounting:	Track mounted
Light Source:	High output 3-step Mac Adam Ellipse Rated life of 50,000 hours at L70
Input:	Universal 120-277V AC, 50/60 Hz
Dimming:	ELV, TRIAC, and 0-10V: 100 - 1%
Operating Temperature:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL & cUL
Warranty:	5 year WAC Lighting guaranteed warranty

BEAM ANGLES



FINISHES



Model	Beam	Lumens Ref Output*	CBCP	Efficacy (lm/W)	Color Temp
41H Ø75mm Ø3"	V 9°	743	15,812	90	927-2700K
	S 16°	1,548	13,750	93	
	N 23°	1,447	7,095	87	930-3000K
	M 35°	1,326	3,300	80	935-3500K
	W 53°	1,375	1,643	83	940-4000K
	A Asym	1,359	3,108	82	

*Lumens and CBCP are reference values for 3000K Color Temperature.
Refer to Multiplier Table in Performance Data to determine other outputs.



Swallow III
High Power COB

WTK-41H | WHK-41H | MO-N41H | MO-R41H

Fixture Type:

Project:

Catalog#:

Location:

ORDERING INFORMATION

CONFIGURATION TABLE			
Model & Power	Beam Angle	Color Temperature & CRI	Housing Finish
WTK-41H (120V)	V - Very Narrow	927 - 2700K - 90	BK - BLACK
WHK-41H (277V)	S - Spot	930 - 3000K - 90	WT - WHITE
MO-N41H (120-277V)	N - Narrow Flood	935 - 3500K - 90	
MO-R41H (120-277V)	M - Medium Flood	940 - 4000K - 90	
	W - Wide Flood		
	A - Asymmetric (Wall Wash)		

W_K-41H-_____

Example: WTK-41H-S930WT

MO-_41H-_____

Example: MO-N41H-M930BK

ACCESSORIES	
LENS-41H-VWT	TL41H 0D LENS MODULE WT
LENS-41H-VBK	TL41H 0D LENS MODULE B
LENS-41H-SWT	TL41H 15D DIFFUSION LENS MODULE WT
LENS-41H-SBK	TL41H 15D DIFFUSION LENS MODULE BK
LENS-41H-NWT	TL41H 24D DIFFUSION LENS MODULE WT
LENS-41H-NBK	TL41H 24D DIFFUSION LENS MODULE BK
LENS-41H-MWT	TL41H 36D DIFFUSION LENS MODULE WT
LENS-41H-MBK	TL41H 36D DIFFUSION LENS MODULE BK
LENS-41H-WWT	TL41H 55D DIFFUSION LENS MODULE WT
LENS-41H-WBK	TL41H 55D DIFFUSION LENS MODULE BK
LENS-41H-HWT	TL41H INTEGRAL HONEYCOMB MODULE WT
LENS-41H-HBK	TL41H INTEGRAL HONEYCOMB MODULE WT
LENS-41H-AWT	TL41H WALL WASHING LENS MODULE WT
LENS-41H-ABK	TL41H WALL WASHING LENS MODULE BK
LENS-41H-EWT	TL41H ELLIPSE LENS MODULE 15X55D WT
LENS-41H-EBK	TL41H ELLIPSE LENS MODULE 15X55D BK
LENS-41H-GWT	TL41H ELLIPSE LENS MODULE 22X55D WT
LENS-41H-GBK	TL41H ELLIPSE LENS MODULE 22X55D BK
LENS-41H-SNT-WT	TL41H INTEGRAL CONDENSER MODULE WT
LENS-41H-SNT-BK	TL41H INTEGRAL CONDENSER MODULE BK
LENS-41H-BD-WT	TL41H FOUR LEAF SHADE MODULE WT
LENS-41H-BD-BK	TL41H FOUR LEAF SHADE MODULE BK

Swallow III
High Power COB

WTK-41H | WHK-41H | MO-N41H | MO-R41H

Fixture Type:

Project:

Catalog#:

Location:

FEATURES

Optics: Armature capable of 360° horizontal rotation and 90° vertical aiming	Construction: Die-cast aluminum fixture with driver enclosed in canopy
LED: - High output COB LED with a 3-step Mac Adam ellipse - Rated operational life of 50,000 hours at L70 (LED maintains 70% of its initial delivered lumens when brand new for 50,000 hours of use.)	Trim and Reflector: Six beam angles are available: Very Narrow, Spot, Narrow Flood, Medium Flood, Wide Flood, and Asymmetric (Wall Wash)
Electrical: - Input power is 120VAC for WTK fixtures, 277VAC for WHK fixtures, and 120-277VAC for MO fixtures - Available in a 17W power level	Installation: - Track mounted (WTK, WHK) - Ceiling and wall mountable as a monopoint fixture (MO)
Dimming: - Electronic low voltage (ELV) and 0-10V dimming are available - ELV and 0-10V dimming are capable of a range of 100 - 5%	Warranty: - WAC Architectural limited warranty up to 5 years - Full warranty found at: waclighting.com/warranty
Notes: The White and Black finishes are electrostatically powder coated	

Swallow III
High Power COB

WTK-41H | WHK-41H | MO-N41H | MO-R41H

Fixture Type:

Project:

Catalog#:


Location:

PERFORMANCE DATA


Polar Candela Distribution Charts

Samples shown with a 120V fixture with a White finish set to 3000K.


Very Narrow Beam: 9° Beam

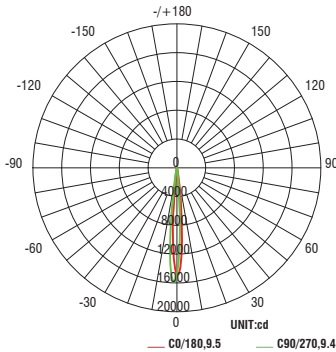


Medium Flood Beam: 35° Beam

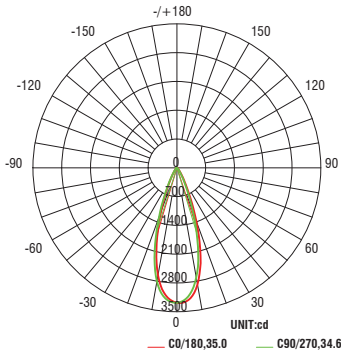


Spot Beam: 16° Beam

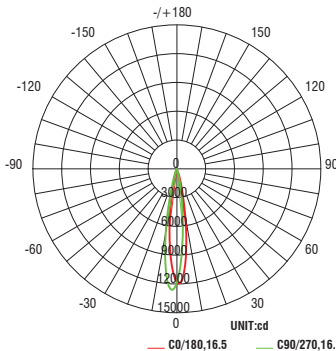

Wide Flood Beam: 53° Beam

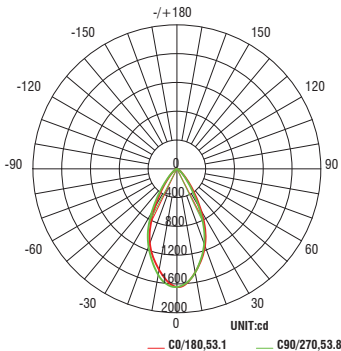

Narrow Flood Beam: 23° Beam

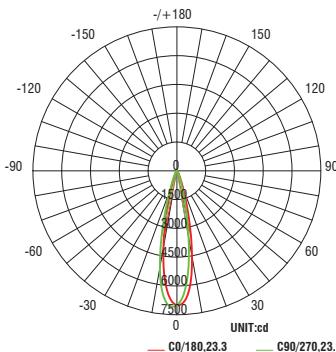

Swallow III
High Power COB

WTK-41H | WHK-41H | MO-N41H | MO-R41H

Fixture Type:

Project:

Catalog#:

Location:

PERFORMANCE DATA

Unified Glare Rating (UGR) Table

General performance of fixtures at 3000K and 90 CRI.

Round Fixture	Angle	UGR Range
Very Narrow	9°	≤ 14
Spot	15°	≤ 15
Narrow Flood	24°	≤ 15
Medium Flood	36°	≤ 16
Wide Flood	55°	≤ 23

Lumens and CBCP Multiplier Table

Use the below table to determine lumens and CBCP values for the combinations of power, color temperature, and CRI values.


Color Temperature			
2700K	3000K	3500K	4000K
0.93	1.00	1.07	1.14

Swallow III
High Power COB

WTK-41H | WHK-41H | MO-N41H | MO-R41H

Fixture Type: _____
Project: _____
Catalog#: _____
Location: _____

DIMENSIONAL DIAGRAMS

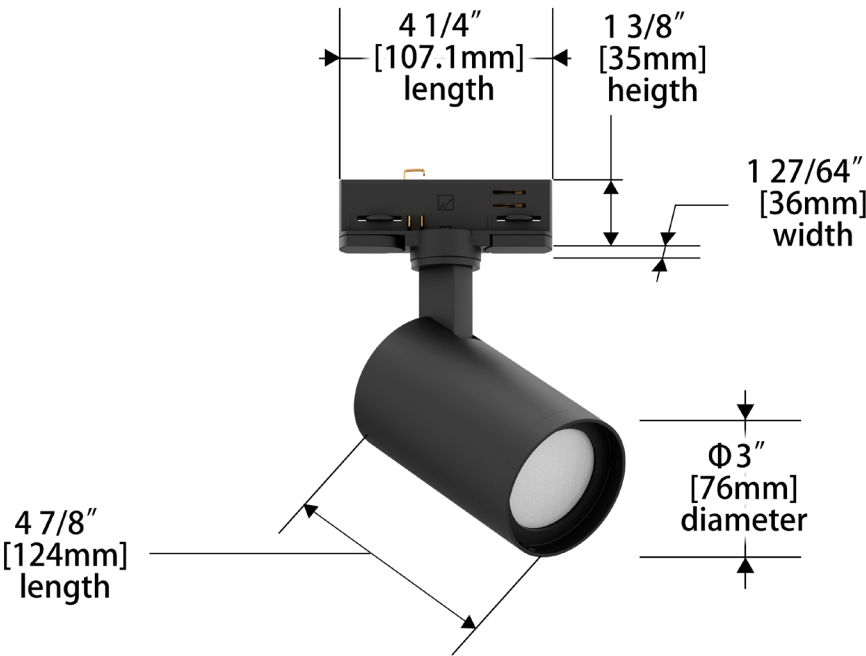


Swallow III High Power COB

WTK-41H | WHK-41H | MO-N41H | MO-R41H


Fixture Type: _____
Project: _____
Catalog#: _____
Location: _____

WIRING DIAGRAM


Schematic diagram of track inlet power connection.

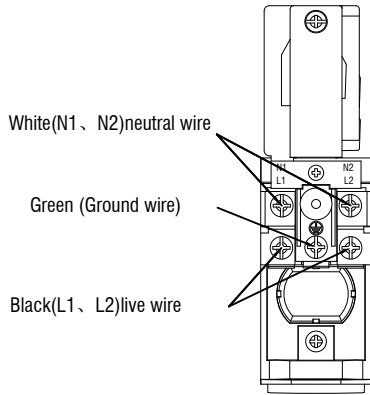

Reference diagram for track and track connector circuit.

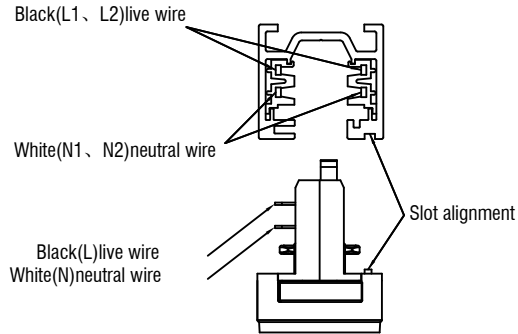

REMODEL

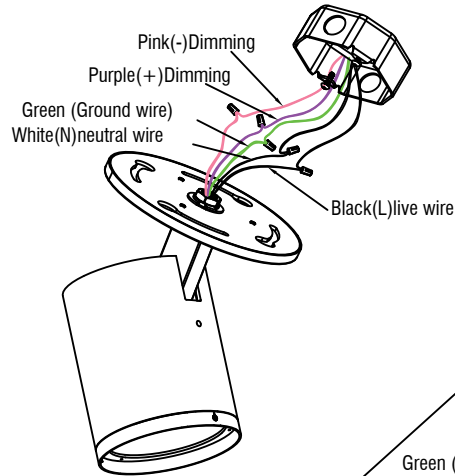

NEW CONSTRUCTION

