

Volta

Static White - 2" Pinhole

R2RPT | R2SPT

Fixture Type: _____


Project: _____

Catalog#: _____

Location: _____



LINE DRAWING



PRODUCT DESCRIPTION

Volta LED downlight series represents an innovation in design and technology for architectural lighting. This high lumen and adaptable family of fixtures with a comprehensive set of round and square fittings, affords a sustainable solution for commercial, corporate, and upscale residential applications. The Pinhole Volta fixtures are capable of adjusting 0-30° vertically and 365° horizontally with locking positions.


SPECIFICATIONS

Construction:	Durable die-cast self flanged aluminum construction
Mounting:	Heavy gauge retention clips support trim firmly Ceiling cut out (Round): Trim $\varnothing 3\frac{9}{16}"$ $\bigcirc$ Trimless $\varnothing 4\frac{1}{4}"$ $\bigcirc$ Ceiling cut out (Square): Trim $3\frac{9}{16}" \times 3\frac{9}{16}"$ $\square$ Trimless $4\frac{1}{4}" \times 4\frac{1}{4}"$ $\square$ Accommodates $\frac{1}{2}"$ - $1\frac{1}{2}"$ ceiling thickness
Light Source:	High output 3-step Mac Adam Ellipse COB Rated life of 50,000 hours at L70
Input:	Universal 120-277V AC, 50/60 Hz
Dimming:	0-10V: 100-0% Electronic Low Voltage (ELV): 100-5%
Maximum Delivered Intensity:	Up to 5,714 cd (Square Narrow Flood 20°, 4000K, CRI 85)
Maximum Delivered Output:	Up to 770 lm (Square Narrow Flood 20°, 4000K, CRI 85)
Standards:	ETL & cETL Wet location listed
Warranty:	5 year WAC Lighting guaranteed warranty

BEAM ANGLES



FINISHES



Model	Beam	Lumens Ref Output*	CBCP	Color Temp	CRI
R2RPT R2SPT	S 12°	Round	235	827 - 2700K	85
		Square	285	830 - 3000K	85
				835 - 3500K	85
	N 20°	Round	555	840 - 4000K	85
		Square	720	927 - 2700K	90
				930 - 3000K	90

Lumens and CBCP are reference values for 3000K Color Temperature and 85 CRI with 22 housing. Refer to Multiplier Table in Performance Data to determine other outputs.

Volta

Static White - 2" Pinhole

R2RPT | R2SPT

Fixture Type:

Project:

Catalog#:

Location:

ORDERING INFORMATION

CONFIGURATION TABLE				
Model & Power	Beam	Color Temperature & CRI	Reflector Finish	Trim Finish
R2RPT R2SPT	S: Spot - 12° N: Narrow Flood - 20°	827 - 2700K - 85	BK - BLACK	-
		830 - 3000K - 85	CB - COPPER	
		835 - 3500K - 85	HZ - HAZE	
		840 - 4000K - 85	WT - WHITE	
		927 - 2700K - 90		
		930 - 3000K - 90		

R2RPT-____-__ Example: R2RPT-N840-WT

HOUSINGS (Required)									
Model		Trim	Power	S	N,F,W	Rating	Driver		Emergency Backup
New Construction Airtight	R2RN (Round)	T Trim	15	10W	15W	IC	DEFAULT	ELV, 0-10V	EM Optional
	R2SN (Square)	L Trimless	22	15W	22W	IC			
New Construction Airtight Chicago Plenum	R2RC (Round)	T Trim	15	10W	15W	IC	DEFAULT	ELV, 0-10V	EM Optional
	R2SC(Square)	L Trimless	22	15W	22W	IC			
Remodel Round or Square	R2BR	T Trim	15	10W	15W	Non-IC	DEFAULT	ELV, 0-10V	N/A
			22	15W	22W	Non-IC			
Remodel	R2RR (Round)	L Trimless	15	15W	15W	Non-IC	DEFAULT	ELV, 0-10V	N/A
	R2SR (Square)		22	22W	22W	Non-IC			

ACCESSORIES			
LENS-16-HLD	Accessory Holder	LENS-16RED	Red Lens
LENS-16HCM	Honeycomb Louver	LENS-16FR	Frosted Lens
LENS-16CRL	Cross Louver	LENS-16SPR	Spread Lens
LENS-16AMB	Amber Lens	LENS-16BEL	Beam Elongating Lens
LENS-16BLU	Blue Lens		
LENS-16GRN	Green Lens		

CEILING ADAPTERS	
R2R-ADP1	Round - ½" to 1" ceiling thickness
R2R-ADP2	Round - 1" to 1½" ceiling thickness
R2S-ADP1	Square - ½" to 1" ceiling thickness
R2S-ADP2	Square - 1" to 1½" ceiling thickness

INTERCHANGEABLE REFLECTORS	
REF-R2-N	Narrow Flood Beam
REF-R2-F	Flood Beam
REF-R2-W	Wide Beam

ORDERING NOTES

1. The "White" trim finish is only available with the reflector finishes "Black" and "Haze".
2. The "Spot - 12°" beam angle is available in 10W and 15W.
3. The "Narrow Flood - 25°" beam angle is available in 15W and 22W.

Volta

Static White - 2" Pinhole

R2RPT | R2SPT

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____


PERFORMANCE DATA

Polar Candela Distribution Charts

Samples shown with 3000K and 90 CRI.


ROUND

Spot Beam: 12° Beam

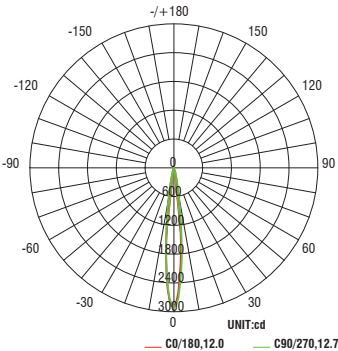


SQUARE


Spot Beam: 12° Beam

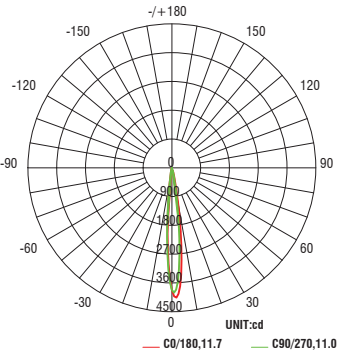

Narrow Flood Beam: 20° Beam

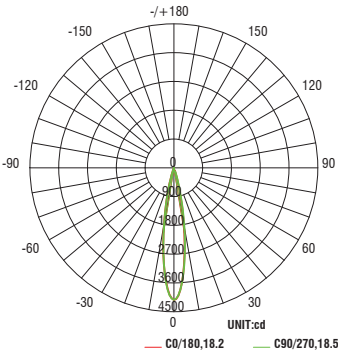

Narrow Flood Beam: 20° Beam

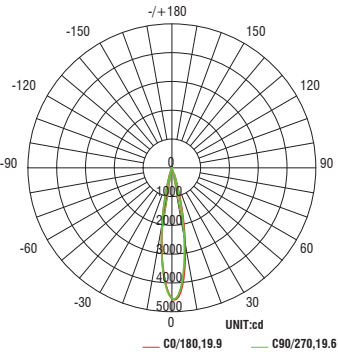

Volta

Static White - 2" Pinhole

R2RPT | R2SPT

Fixture Type:

Project:

Catalog#:

Location:

PERFORMANCE DATA

Unified Glare Rating (UGR) Table

UGR values shown are calculated at 3000K and 90 CRI. General performance of beam angles shown below.

Round Fixture	Angle	UGR Range	Square Fixture	Angle	UGR Range
Spot	12°	≤0	Spot	12°	≤0
Narrow Flood	20°	≤0	Narrow Flood	20°	≤0

Lumens and CBCP Multiplier Table

Use the below table to determine lumens and CBCP values for the combinations of power, color temperature, and CRI values.

Multiplier		TRIM					
		827	927	830	930	835	840
HOUSING	22	0.95	0.81	1.00	0.86	1.05	1.07
	15	0.66	0.56	0.69	0.59	0.72	0.74