

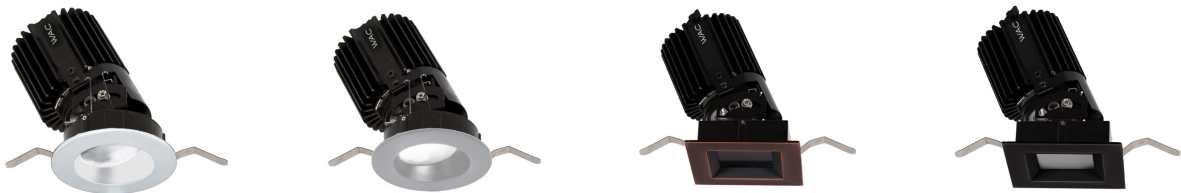


Volta
Tunable White - 2" Adjustable
R2RAT | R2SAT

Fixture Type: _____
Project: _____
Catalog#: _____
Location: _____



LINE DRAWING



PRODUCT DESCRIPTION

Volta 2" Tunable White recessed series represents an innovation in design and technology for architectural lighting. This high lumen and adaptable family of fixtures with a comprehensive set of round and square fittings, affords a sustainable solution for commercial, corporate, and upscale residential applications. The Adjustable Volta fixtures are capable of adjusting 0-45° vertically and 365° horizontally with locking positions.

SPECIFICATIONS

Construction:	Durable die-cast self flanged aluminum construction
Mounting:	Heavy gauge retention clips support trim firmly Ceiling cut out (Round): Trim Ø 3 9/16" Invisible Ø 4 1/4" Ceiling cut out (Square): Trim 3 9/16" x 3 9/16" Invisible 4 1/4" x 4 1/4" Accommodates 1/2" - 1 1/2" ceiling thickness
Light Source:	High output 3-step Mac Adam Ellipse COB Rated life of 50,000 hours at L70
Input:	Universal 120-277V AC, 50/60 Hz
Dimming:	2 Channel 0-10V: 100-0.1% 2 Channel DMX512-A with RDM: 100-0.1% linear dimming. Channels for intensity and CCT tuning.
Maximum Delivered Intensity:	Up to 3,885 cd (Square Narrow Flood 25°, TWA 4000K, CRI 98)
Maximum Delivered Output:	Up to 907 lm (Square Flood 35°, TWB 5000K, CRI 98)
Standards:	ETL & cETL Wet location listed
Warranty:	5 year WAC Lighting guaranteed warranty

BEAM ANGLES



FINISHES



Model	Beam	Lumens	CBCP	Color Temp	CRI
R2RAT R2SAT	N 25°	Round	620	TWA 1800K-4000K	98
		Square	705		
	F 35°	Round	600		
		Square	760		
	N 25°	Round	565	TWB 2700K-6500K	98
		Square	640		
	F 35°	Round	645		
		Square	810		

Lumens and CBCP are reference values for 3000K Color Temperature with 22 housing. Refer to Multiplier Table in Performance Data to determine other outputs.



Volta
Tunable White - 2" Adjustable
R2RAT | R2SAT

Fixture Type: _____
Project: _____
Catalog#: _____
Location: _____

ORDERING INFORMATION

CONFIGURATION TABLE				
Model & Power	Beam	Color Temperature & CRI	Reflector Finish	Trim Finish
R2RAT R2SAT	N - 25° F - 35°	TWA - 1800K-4000K TWB - 2700K-6500K	BK - BLACK CB - COPPER HZ - HAZE WT - WHITE	WT - WHITE

R2RAT-____-____

Example: R2RAT-NTWA-WT

HOUSINGS (Required)				
Model	Trim	Power	Driver	
New Construction Airtight - Round R2RN	T <i>Trim</i> L <i>Invisible Trim</i>	15 <i>15W IC</i> 22 <i>22W Non-IC</i>	T-X <i>DMX512-A</i> T-Z <i>2CH 0-10V</i>	
New Construction Airtight - Square R2SN	T <i>Trim</i> L <i>Invisible Trim</i>	15 <i>15W IC</i> 22 <i>22W Non-IC</i>	T-X <i>DMX512-A</i> T-Z <i>2CH 0-10V</i>	
Remodel Non-IC Round & Square R2BR	T <i>Trim</i>	15 <i>15W IC</i> 22 <i>22W IC</i>	T-X <i>DMX512-A</i> T-Z <i>2CH 0-10V</i>	
Remodel Non-IC Round R2RR	L <i>Invisible Trim</i>	15 <i>15W IC</i> 22 <i>22W IC</i>	T-X <i>DMX512-A</i> T-Z <i>2CH 0-10V</i>	
Remodel Non-IC Square R2SR	L <i>Invisible Trim</i>	15 <i>15W Non-IC</i> 22 <i>22W Non-IC</i>	T-X <i>DMX512-A</i> T-Z <i>2CH 0-10V</i>	

ACCESSORIES			
LENS-16-HLD	<i>Accessory Holder</i>	LENS-16RED	<i>Red Lens</i>
LENS-16HCM	<i>Honeycomb Louver</i>	LENS-16FR	<i>Frosted Lens</i>
LENS-16CRL	<i>Cross Louver</i>	LENS-16SPR	<i>Spread Lens</i>
LENS-16AMB	<i>Amber Lens</i>	LENS-16BEL	<i>Beam Elongating Lens</i>
LENS-16BLU	<i>Blue Lens</i>		
LENS-16GRN	<i>Green Lens</i>		

CEILING ADAPTERS	
R2R-ADP1	<i>Round - ½" to 1" ceiling thickness</i>
R2R-ADP2	<i>Round - 1" to 1½" ceiling thickness</i>
R2S-ADP1	<i>Square - ½" to 1" ceiling thickness</i>
R2S-ADP2	<i>Square - 1" to 1½" ceiling thickness</i>

INTERCHANGEABLE REFLECTORS	
REF-R2-N	<i>Narrow Flood Beam</i>
REF-R2-F	<i>Flood Beam</i>
REF-R2-W	<i>Wide Beam</i>

ORDERING NOTES

- The "White" trim finish is only available with the reflector finishes "Black" and "Haze".
- The "Narrow Flood - 25°" and "Flood - 35°" beam angles are available in 15W and 22W.

wacarchitectural.com | WAC Architectural, a WAC Group brand.

WAC Group Headquarters
44 Harbor Park Drive
Port Washington, NY 11050

WAC Architectural
Phone (800) 526.2588
Fax (800) 526.2585

APR 2026 | P. 2 of 5

Volta

Tunable White - 2" Adjustable

R2RAT | R2SAT

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____


PERFORMANCE DATA

Polar Candela Distribution Charts


Samples shown with a 22W fixture set to 4000K and 98 CRI.

ROUND

Narrow Flood Beam: 25° Beam

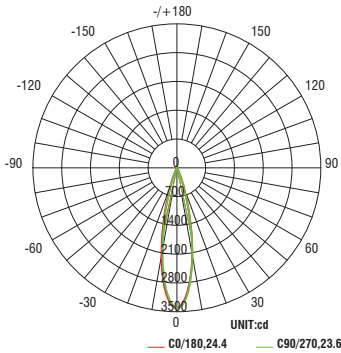


Flood Beam: 35° Beam

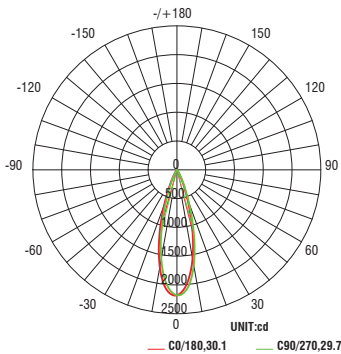


SQUARE

Narrow Flood Beam: 25° Beam

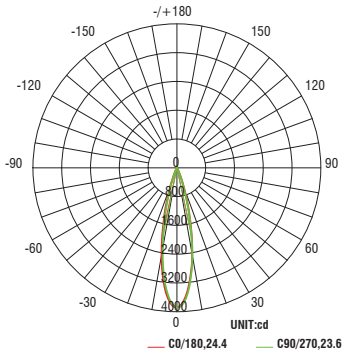

Flood Beam: 35° Beam

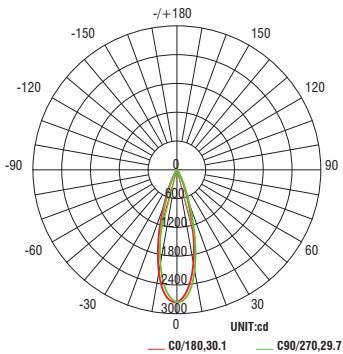

Volta
Tunable White - 2" Adjustable
R2RAT | R2SAT

Fixture Type:

Project:

Catalog#:

Location:

PERFORMANCE DATA

Unified Glare Rating (UGR) Table

UGR values shown are calculated at 4000K and 98 CRI. General performance of beam angles shown below.

Round Fixture	Angle	UGR Range	Square Fixture	Angle	UGR Range
Narrow Flood	25°	≤7	Narrow Flood	25°	≤7
Flood	35°	≤8	Flood	35°	≤9

Lumens and CBCP Multiplier Table

Use the below table to determine lumens and CBCP values for the combinations of power, color temperature, and CRI values.

Lumens & CBCP Multiplier		Color Temperature					
TWA (1800K - 4000K)	Housing Power Level	1800K	2200K	2700K	3000K	3500K	4000K
	22 (22W)	0.68	0.82	0.94	1.00	1.07	1.11
	15 (15W)	0.46	0.56	0.64	0.68	0.73	0.75
TWB (2700K - 6500K)	Housing Power Level	2700K	3000K	3500K	4000K	5000K	6500K
	22 (22W)	0.96	1.00	1.06	1.09	1.12	1.11
	15 (15W)	0.65	0.68	0.72	0.74	0.76	0.75

Volta

Tunable White - 2" Adjustable

R2RAT | R2SAT

Fixture Type: _____

Project: _____

Catalog#: _____

Location: _____

PERFORMANCE DATA

NATURAL TUNABLE WHITE CCT TUNING:

The CCT of the Volta Tunable White fixture may be adjusted.

Using the DMX byte values in the adjacent table mapped to CH1 and CH2 of the desired output, the Volta Tunable White fixture may be tuned to increments of 100K (Kelvin) from 1800K to 4000K for TWA and 2700K to 6500K for TWB, at full intensity.

Note: Through compatible RDM tool, fixture channels can be reassigned to desired consecutive channels. Factory default is DMX channel 1 and 2.

VOLTA 2" TUNABLE WHITE DMX BYTE VALUE VS CCT					
TWA DMX			TWB DMX		
BYTE VALUES AT FULL INTENSITY			BYTE VALUES AT FULL INTENSITY		
CCT (K)	CH 1: INTENSITY	CH 2: CCT	CCT (K)	CH 1: INTENSITY	CH 2: CCT
4000	255	255	6500	255	252
3900	255	253	6400	255	249
3800	255	247	6300	255	245
3700	255	241	6200	255	241
3600	255	233	6100	255	238
3500	255	225	6000	255	232
3400	255	219	5900	255	229
3300	255	210	5800	255	228
3200	255	202	5700	255	222
3100	255	193	5600	255	217
3000	255	185	5500	255	212
2900	255	176	5400	255	208
2800	255	166	5300	255	204
2700	255	154	5200	255	199
2600	255	141	5100	255	194
2500	255	126	5000	255	190
2400	255	109	4900	255	185
2300	255	82	4800	255	179
2200	255	79	4700	255	173
2100	255	64	4600	255	168
2000	255	46	4500	255	160
1900	255	26	4400	255	152
1800	255	0	4300	255	144
			4200	255	138
			4100	255	131
			4000	255	123
			3900	255	115
			3800	255	107
			3700	255	98
			3600	255	89
			3500	255	80
			3400	255	71
			3300	255	62
			3200	255	51
			3100	255	41
			3000	255	30
			2900	255	16
			2800	255	4
			2700	255	0