

## AETHER


### 2" - Adjustable

R2ARAT | R2ARAL | R2ASAT | R2ASAL

Fixture Type: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Catalog#: \_\_\_\_\_  
 Location: \_\_\_\_\_



#### LINE DRAWING

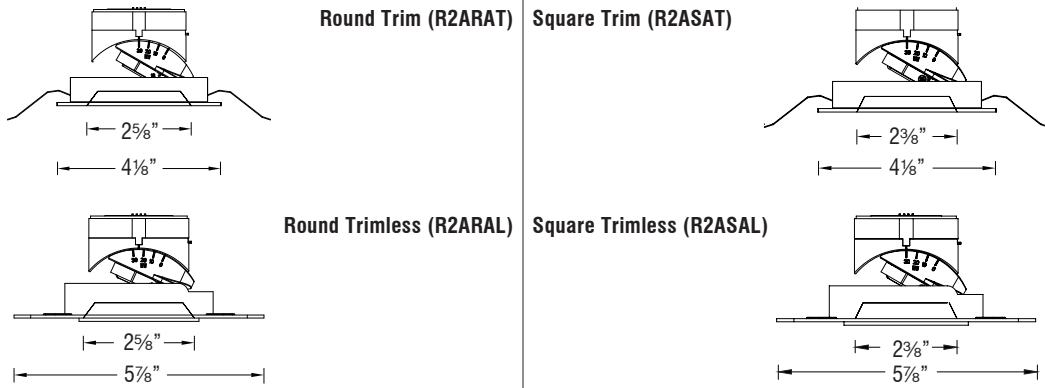

#### PRODUCT DESCRIPTION

The Aether 2" is compatible with shallow housings that are designed to fit in tight plenum spaces without sacrificing lumen output.

#### SPECIFICATIONS

**Construction:** Die-cast aluminum trim with die-cast aluminum heat sink

**Mounting:** Heavy gauge retention clips support trim firmly  
 Ceiling cut out (Round): Trim  $\varnothing$  3 3/4"  $\bigcirc$   
 Trimless  $\varnothing$  4 1/8"  $\bigcirc$   
 Ceiling cut out (Square): Trim 3 3/4" x 3 3/4"  $\square$   
 Trimless 4 1/8" x 4 1/8"  $\square$   
 Remodel ceiling cutout: 3 3/4"  $\bigcirc$ , 3 3/4" x 3 3/4"  $\square$   
 Accommodates 1/2" - 1" ceiling thickness

**Light Source:** High output 3-step Mac Adam Ellipse COB  
 Rated life of 50,000 hours at L70

**Input:** Universal 120-277V AC, 50/60 Hz

**Dimming:** ELV, TRIAC, and 0-10V: 100 - 5%

**Maximum Delivered Intensity:** Up to 8,807 cd (Round Spot 15°, 4000K, 85 CRI)

**Maximum Delivered Output:** Up to 1,397 lm (Square Narrow Flood 26/Square Flood 40°, 4000K, 85 CRI)

**Operating Temperature:** -4°F to 104°F (-20°C to 40°C)


**Standards:** ETL & cETL Damp location listed, ETL & cETL Wet location listed (Lensed options only), Title 24 JA8 Compliant

**Warranty:** 5 year WAC Lighting guaranteed warranty

#### BEAM ANGLES



#### FINISHES



Model	Beam		Lumens	CBCP	Color Temp	Finish
			Ref	Output*		
0-30°, Damp Location	S 15°	Round	720	6935	827 - 2700K - 85 830 - 3000K - 85 835 - 3500K - 85 840 - 4000K - 85 927 - 2700K - 90 930 - 3000K - 90	Black
R2ARAT Round Trim		Square	720	6935		Haze
R2ARAL Round Trimless	N 26°	Round	1095	3680		White
R2ASAT Square Trim		Square	1100	3685		Black/White
R2ASAL Square Trimless	F 40°	Round	1090	2170		Haze/White
		Square	1100	2180		
0-25°, Wet Location	S 16°	Round	660	5355	827 - 2700K - 85 830 - 3000K - 85 835 - 3500K - 85 840 - 4000K - 85 927 - 2700K - 90 930 - 3000K - 90	Lensed Black
R2ARAT Round Trim		Square	660	5355		Lensed Haze
R2ARAL Round Trimless	N 28°	Round	1015	3175		Lensed White
R2ASAT Square Trim		Square	1015	3175		Lensed Black/White
R2ASAL Square Trimless	F 40°	Round	1000	1915		Lensed Haze/White
		Square	1015	1935		

Lumens and CBCP are reference values for fixtures set to 3000K Color Temperature and 90 CRI. Refer to Multiplier Table in Performance Data to determine other outputs.

wacarchitectural.com | WAC Architectural, a WAC Group brand.

WAC Group Headquarters  
 44 Harbor Park Drive  
 Port Washington, NY 11050

WAC Architectural  
 Phone (800) 526.2588  
 Fax (800) 526.2585



APR 2026 | P. 1 of 4

WAC GROUP

# AETHER

2" - Adjustable

R2ARAT | R2ARAL | R2ASAT | R2ASAL

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Catalog#: \_\_\_\_\_

Location: \_\_\_\_\_

## ORDERING INFORMATION

CONFIGURATION TABLE			
Model & Power	Beam	Color Temperature & CRI	Reflector Finish
<b>R2ARAT</b>	<b>S - 15, 16°</b>	<b>827 - 2700K - 85</b>	<b>BK - BLACK</b>
<b>R2ARAL</b>	<b>N - 26, 28°</b>	<b>830 - 3000K - 85</b>	<b>HZ - HAZE</b>
<b>R2ASAT</b>	<b>F - 40°</b>	<b>835 - 3500K - 85</b>	<b>WT - WHITE</b>
<b>R2ASAL</b>		<b>840 - 4000K - 85</b>	<b>BKWT - BLACK/WHITE</b>
		<b>927 - 2700K - 90</b>	<b>HZWT - HAZE/WHITE</b>
		<b>930 - 3000K - 90</b>	<b>LBK - LENSED BLACK</b>
			<b>LWT - LENSED WHITE</b>
			<b>LBKWT - LENSED BLACK/WHITE</b>
			<b>LHZWT - LENSED HAZE/WHITE</b>

**R2A**\_\_\_\_ - \_\_\_\_ - \_\_\_\_\_

Example: R2ARAT-S930-BKWT

HOUSINGS		
	Model	Power
IC-Rated, Airtight New Construction	HR-2LED-H13A	15W
IC-Rated, Airtight New Construction Chicago Plenum	HR-2LED-H13AC	15W
IC-Rated, Airtight Remodel	HR-2LED-R10A	9W
Non-IC Rated, Airtight Remodel	HR-2LED-R15A	15W

**HR-2LED**-\_\_\_\_\_

Example: HR-2LED-H13A

### ORDERING NOTES

- Only trimmed fixtures cannot be ordered with a finish that includes a trim finish (BKWT, HZWT, LBKWT, LHZWT).

# AETHER

## 2" - Adjustable

R2ARAT | R2ARAL | R2ASAT | R2ASAL

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Catalog#: \_\_\_\_\_

Location: \_\_\_\_\_


### PERFORMANCE DATA

#### Polar Candela Distribution Charts

Samples shown from a 15W fixture with a Lensed White finish set to 3000K and 90 CRI.


#### ROUND

##### Narrow Flood Beam: 28° Beam

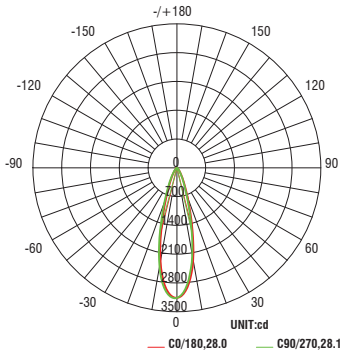


#### SQUARE


##### Narrow Flood Beam: 28° Beam

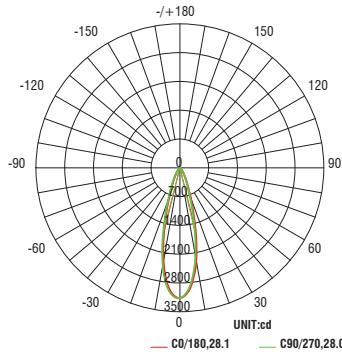

##### Flood Beam: 40° Beam

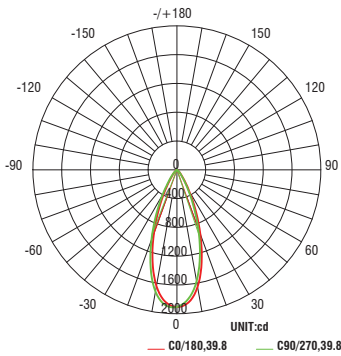

##### Flood Beam: 40° Beam

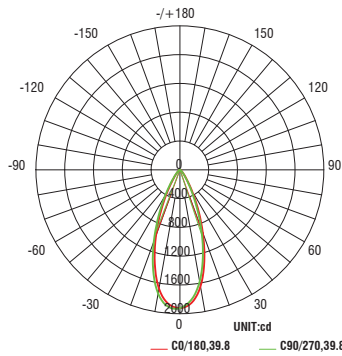

# AETHER

## 2" - Adjustable

R2ARAT | R2ARAL | R2ASAT | R2ASAL

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Catalog#: \_\_\_\_\_

Location: \_\_\_\_\_

### PERFORMANCE DATA

#### Unified Glare Rating (UGR) Table

UGR values shown are calculated at 3000K and 90 CRI.

Round Fixture	Angle	UGR Range
Narrow Flood	28°	≤ 14
Flood	40°	≤ 16

Square Fixture	Angle	UGR Range
Narrow Flood	28°	≤ 15
Flood	40°	≤ 16

#### Lumens and CBCP Multiplier Table

Use the below table to determine lumens and CBCP values for the combinations of power, color temperature, and CRI values.

Color Temperature and CRI					
827	830	835	840	927	930
1.16	1.23	1.26	1.27	0.96	1.00