

CUBE

6" Wall Mount

DC-WS06 | DC-WS0622

Fixture Type:



Project:

Catalog#:

Location:



LINE DRAWING



PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cubical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

SPECIFICATIONS

Construction: Durable die-cast aluminum construction
Mounting: Wall mounted

Light Source: High output 3-step Mac Adam Ellipse COB
 Rated life of 60,000 hours at L70
Input: Universal 120-277V AC 50/60 Hz
Dimming: Electronic low voltage (ELV) : 100 - 5%
 0-10V: 100 - 1%
Maximum Delivered Intensity: Up to 13062 cd (Spot 16°, 4000K, CRI 85)
Maximum Delivered Output: Up to 2470 lm (Flood 33°, 4000K, CRI 85)
Operating Temperature: -13°F to 122°F (-25°C to 50°C)

Standards: IP65 rated, ETL & cETL wet location listed
 Energy Star® 2.2 rated, Title 24 JA8-2016 Compliant
Warranty: 5 year WAC Lighting guaranteed warranty

BEAM ANGLES



S - 16°



N - 28°



F - 38°

FINISHES

Black
BKBronze
BZGraphite
GHWhite
WT

Beam Angle	Color Temp	CRI	Reference Lumens	Output ¹ CBCP	Efficacy (Lm/W)	Light Direction
S Spot 16°	927	2700K	90	2820	18842	81
	827	2700K	85	3385	22608	97
	930	3000K	90	2925	19543	84
	830	3000K	85	3535	23632	101
	835	3500K	85	3630	24255	104
	840	4000K	85	3665	24490	105
N Narrow 28°	927	2700K	90	2800	7992	80
	827	2700K	85	3360	9589	96
	930	3000K	90	2900	8290	83
	830	3000K	85	3510	10024	100
	835	3500K	85	3600	10288	103
	840	4000K	85	3635	10388	104
F Flood 38°	927	2700K	90	2825	5451	81
	827	2700K	85	3390	6540	97
	930	3000K	90	2930	5654	84
	830	3000K	85	3545	6836	101
	835	3500K	85	3640	7017	104
	840	4000K	85	3675	7085	105

Reference output shows 35W output aimed straight up or down. Multiply by 0.7 to determine output for 22W combinations.

wacarchitectural.com | WAC Architectural, a WAC Group brand.

WAC Group Headquarters
 44 Harbor Park Drive
 Port Washington, NY 11050

WAC Architectural
 Phone (800) 526.2588
 Fax (800) 526.2585



APR 2026 | P. 1 of 3

WAC GROUP

CUBE

6” Wall Mount

DC-WS06 | DC-WS0622

Fixture Type:

Project:

Catalog#:

Location:

ORDERING INFORMATION

CONFIGURATION TABLE				
Model & Size	Beam	Color Temperature & CRI	Light Direction	Housing Finish
DC-WS06 (35W) DC-WS0622 (22W)	S - 16°	827 - 2700K - 85	S - Straight	BK - BLACK
	N - 28°	830 - 3000K - 85	A - Away	BZ - BRONZE
	F - 38°	835 - 3500K - 85	B - Towards	GH - GRAPHITE
		840 - 4000K - 85		WT - WHITE
		927 - 2700K - 90		
		930 - 3000K - 90		

DC-WS06-____-__

Example: DC-WS06-N927S-BK

ORDERING NOTES	
1.	16° and 28° can only be ordered with the Light Direction “S-Straight”.
2.	38° beam fixtures can be ordered with the Light Directions “S-Straight”, “A-Away”, and “B-Towards”.

CUBE

6" Wall Mount

DC-WS06 | DC-WS0622

Fixture Type:

Project:

Catalog#:


Location:

PERFORMANCE DATA


Polar Candela Distribution Charts

Samples shown with a 35W fixture set to 3000K and 90 CRI.


Spot Beam: 16° Beam

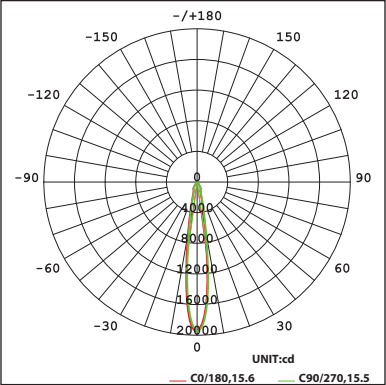

Narrow Flood Beam: 28° Beam

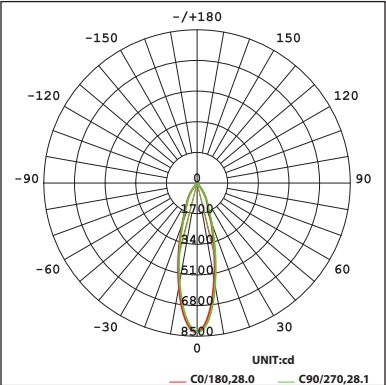

Flood Beam: 38° Beam

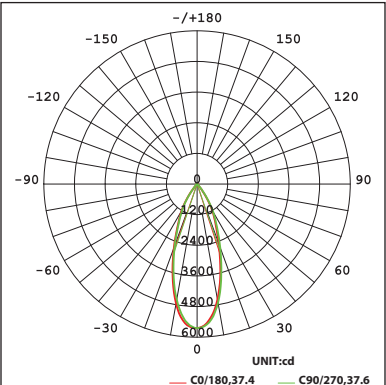

Unified Glare Rating (UGR) Table

General performance of fixtures at 3000K and 90 CRI.

Beam	Angle	UGR Range
Spot	16°	≤ 8
Narrow Flood	28°	≤ 8
Flood	38°	≤ 9