


Exterminator II
1035 W Track Luminaire
WTK-1035 | WHK-1035

Fixture Type: _____
Project: _____
Catalog#: _____
Location: _____



PRODUCT DESCRIPTION
Exterminator II offers superior light output in a small, unobtrusive design. Developed for upscale residential and commercial environments.

SPECIFICATIONS	
Construction:	Die-cast aluminum with removable front cap
Mounting:	Track mounted
Light Source:	High output 3-step Mac Adam Ellipse COB Rated life of 50,000 hours at L70
Input:	120 VAC (WTK), 277 VAC (WHK)
Power:	36W
Dimming:	ELV, TRIAC: 100 - 1%
Maximum Delivered Intensity:	Up to 31,770 cd (Spot 15°, 4000K, CRI 85)
Maximum Delivered Output:	Up to 3,410 lm (Spot 15°, 4000K, CRI 85)
Operating Temperature:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL & cETL Dry location listed, Title 24 JA8 Compliant
Warranty:	5 year WAC Lighting guaranteed warranty

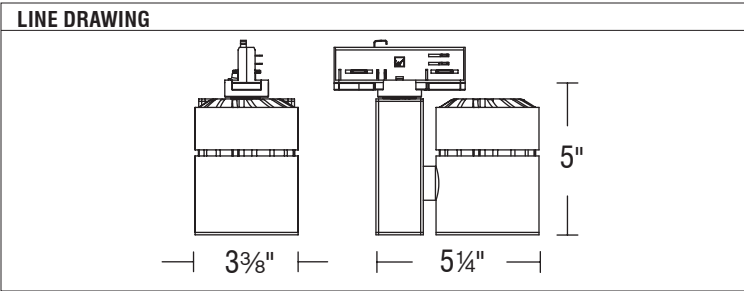

BEAM ANGLES		
		
S - 15°	N - 30°	F - 51°

FINISHES	
	
Black BK	White WT

Model	Beam	Color Temp		CRI	Lumens	CBCP
WTK 120V WHK 1277V	1035S 15°	827	2700K	85	3,120	29,050
		927	2700K	90	2,575	23,990
		830	3000K	85	3,315	30,870
		930	3000K	90	2,690	25,070
		835	3500K	85	3,395	31,615
	1035N 30°	840	4000K	85	3,410	31,770
		827	2700K	85	2,860	7,295
		927	2700K	90	2,360	6,025
		830	3000K	85	3,035	7,755
		930	3000K	90	2,465	6,295
	1035F 51°	835	3500K	85	3,110	7,940
		840	4000K	85	3,125	7,980
		827	2700K	85	2,885	3,240
		927	2700K	90	2,380	2,675
		830	3000K	85	3,065	3,445
		930	3000K	90	2,490	2,795
		835	3500K	85	3,140	3,525
		840	4000K	85	3,155	3,545



Exterminator II
1035 W Track Luminaire
WTK-1035 | WHK-1035

Fixture Type:

Project:

Catalog#:

Location:

ORDERING INFORMATION

CONFIGURATION TABLE			
Model & Power	Beam Angle	Color Temperature & CRI	Housing Finish
WTK-1035 (120V) WHK-1035 (277V)	S - Spot	827 - 2700K - 85	BK - BLACK
	N - Narrow Flood	830 - 3000K - 85	WT - WHITE
	F - Flood	835 - 3500K - 85	
		840 - 4000K - 85	
		927 - 2700K - 90	
		930 - 3000K - 90	

W_K-1035_ - _ - _
Example: WTK-1035S-930-BK

ACCESSORIES	
LENS-20-AMB	Amber Lens
LENS-20-BLU	Blue Lens
LENS-20-GRN	Green Lens
LENS-20-RED	Red Lens
LENS-20-UVF	UV Filter Lens
LENS-20-FR	Frosted Lens
LENS-20-SPR	Spread Lens
LENS-20-BEL	Beam Elongating Lens
LENS-20P-CRL-BK	Cross Louver - Black
LENS-20P-CRL-WT	Cross Louver - White
LENS-20-SNOOT-B	Snoot - Black
LENS-20-SNOOT-W	Snoot - White

Exterminator II
1035 W Track Luminaire
WTK-1035 | WHK-1035

Fixture Type:

Project:

Catalog#:

Location:

FEATURES

Optics: • Fixture features 365° horizontal rotation and 180° vertical aiming	Construction: • Die-cast aluminum body
LED: • High output COB LED with a 3-step Mac Adam ellipse • Rated operational life of 50,000 hours at L70 (LED maintains 70% of its initial delivered lumens when brand new for 50,000 hours of use.)	Trim and Reflector: • Three beam angles are available: Spot, Narrow Flood, and Flood
Electrical: • Input power is 120V (WTK) or 277V (WHK) • Available at a 36W power level	Installation: • Suitable for W track systems
Dimming: • Electronic low voltage (ELV) and TRIAC dimming are both available • ELV and TRIAC dimming are capable of a range of 100 - 1%	Warranty: • WAC Architectural limited warranty up to 5 years • Full warranty found at: waclighting.com/warranty
Notes: • The White and Black finishes for the body are electrostatically powder coated	

Exterminator II
1035 W Track Luminaire
WTK-1035 | WHK-1035

Fixture Type:

Project:

Catalog#:


Location:

PERFORMANCE DATA


Polar Candela Distribution Charts

Samples shown with 36W fixture with a White finish set to 3000K and 90 CRI.


Spot Beam: 15° Beam

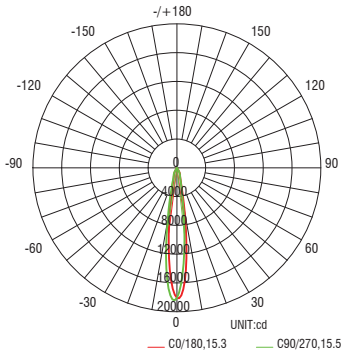

Narrow Flood Beam: 30° Beam

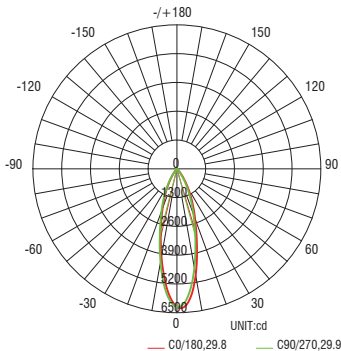

Flood Beam: 51° Beam

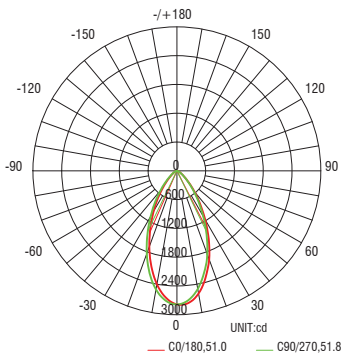

Exterminator II
1035 W Track Luminaire
WTK-1035 | WHK-1035

Fixture Type:

Project:

Catalog#:

Location:

PERFORMANCE DATA

Unified Glare Rating (UGR) Table

UGR values shown are calculated for a fixture at 3000K and 90 CRI.

Round Fixture	Angle	UGR Range
Spot	15°	≤ 14
Narrow Flood	30°	≤ 15
Flood	51°	≤ 20