

Stealth Framing Projector  
Adjustable

WTK-1210 | WHK-1210 | MO-1210

Fixture Type:


Project:

Catalog#:

Location:



LINE DRAWING

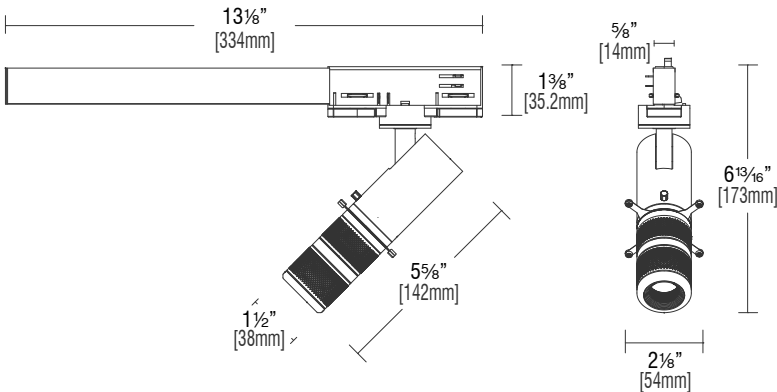

PRODUCT DESCRIPTION

The sleek, stylish luminaire projects a square, rectangular or circular area of light with crisp lines to frame or highlight art objects, providing maximum visual impact. Like a quality camera lens, the innovative projector contains adjustable lenses as well as shims to frame a sharp accenting light the width and length of the object. It can zoom in for a closeup or zoom out to frame larger pieces of art.

SPECIFICATIONS

|                              |                                                                                          |
|------------------------------|------------------------------------------------------------------------------------------|
| Construction:                | Die-cast aluminum with optical glass lenses                                              |
| Mounting:                    | Track mounted; ceiling or wall mounted                                                   |
| Light Source:                | Integrated LED, High output 3-step Mac Adam Ellipse<br>Rated life of 50,000 hours at L70 |
| Input:                       | 120 VAC (WTK), 277 VAC (WHK), 120-277 VAC (MO)                                           |
| Power:                       | 12W                                                                                      |
| Dimming:                     | ELV, TRIAC (120V only): 100 - 5%                                                         |
| Maximum Delivered Intensity: | Up to 3,720 cd (4000K)                                                                   |
| Maximum Delivered Output:    | Up to 380 lm (4000K)                                                                     |
| Operating Temperature:       | -4°F to 104°F (-20°C to 40°C)                                                            |
| Standards:                   | ETL & cETL Damp location listed                                                          |
| Warranty:                    | 5 year WAC Lighting guaranteed warranty                                                  |

FINISHES



| Model                           |               | Color Temp | Lumens | CBCP | CRI   |    |
|---------------------------------|---------------|------------|--------|------|-------|----|
| WTK-1210<br>WHK-1210<br>MO-1210 | Ø2½"<br>Ø54mm | 927        | 20°    | 350  | 3,271 | 90 |
|                                 |               |            | 35°    | 350  | 1,367 |    |
|                                 |               | 930        | 20°    | 361  | 3,372 |    |
|                                 |               |            | 35°    | 361  | 1,409 |    |
|                                 |               | 935        | 20°    | 386  | 3,609 |    |
|                                 |               |            | 35°    | 386  | 1,508 |    |
|                                 |               | 940        | 20°    | 393  | 3,676 |    |
|                                 |               |            | 35°    | 393  | 1,536 |    |



Stealth Framing Projector  
Adjustable

WTK-1210 | WHK-1210 | MO-1210

Fixture Type:

Project:

Catalog#:

Location:

ORDERING INFORMATION

| CONFIGURATION TABLE |                         |                |
|---------------------|-------------------------|----------------|
| Model & Power       | Color Temperature & CRI | Fixture Finish |
| WTK-1210 (120V)     | 927 - 2700K - 90        | BK - BLACK     |
| WHK-1210 (277V)     | 930 - 3000K - 90        | WT - WHITE     |
| MO-1210 (120-277V)  | 935 - 3500K - 90        |                |
|                     | 940 - 4000K - 90        |                |

W\_\_-\_\_\_\_-\_\_

Example: WTK-1210-940-BK

MO-1224-\_\_\_\_-\_\_

Example: MO-1210-930-WT

| ORDERING NOTES |                                                                                                 |
|----------------|-------------------------------------------------------------------------------------------------|
| 1.             | The WTK-1210 fixture is 120V and the WHK-1210 fixture is 277V. Both fixtures are track mounted. |
| 2.             | The MO-1210 fixture is a ceiling mounted monopoint fixture.                                     |

Stealth Framing Projector  
Adjustable

WTK-1210 | WHK-1210 | MO-1210

Fixture Type:

Project:

Catalog#:


Location:

PERFORMANCE DATA


Polar Candela Distribution Charts

Samples shown with a 12W fixture set to 3000K.

Minimum Zoom - 20°

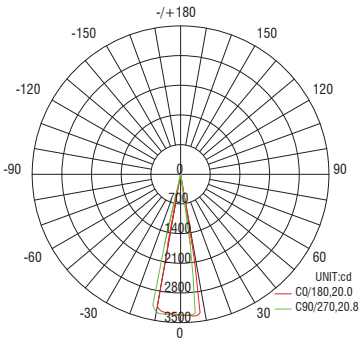

Maximum Zoom - 35°

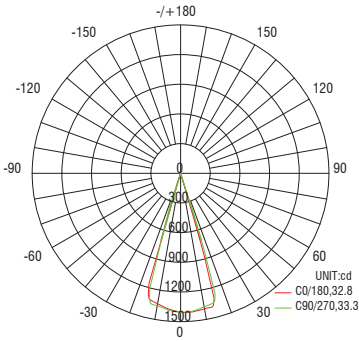

Unified Glare Rating (UGR) Table

General performance of fixtures at 3000K and 90 CRI.

| Round Fixture | Angle | UGR Range |
|---------------|-------|-----------|
| Minimum Zoom  | 20°   | ≤0        |
| Maximum Zoom  | 35°   | ≤0        |