



Fuego Compact
1" RGBW
FCH01

Fixture Type: _____
Project: _____
Catalog#: _____
Location: _____



LINE DRAWING

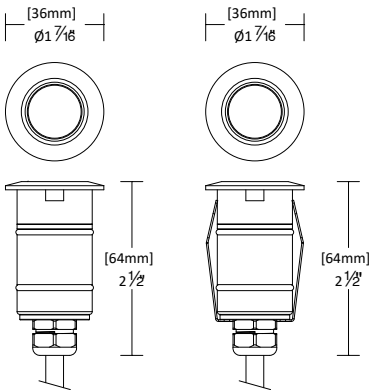

PRODUCT DESCRIPTION

The FUEGO Compact features a high-quality 316 stainless steel construction. It is designed for outdoor environments, with an IP68 protection rating, IK08 impact resistance rating, and a load-bearing capacity of up to 1500 kg. The fixture is equipped with a high-transmittance lens and a patented anti-glare system. The pre-buried sleeve design allows for easy installation and maintenance. It is ideal for use in residential areas, including parks, plazas, shopping centers, and for facade lighting applications.

SPECIFICATIONS

Construction:	Die-cast stainless steel trim with die-cast aluminum heat sink
Mounting:	In-ground installation with vacuum molded mud stopper and PVC casing In-ground cut out: Ø4½" / 114mm ○
Light Source:	High output 3-step Mac Adam Ellipse Rated life of 50,000 hours at L70
Input:	24 VDC
Dimming:	DMX512-A with RDM
Maximum Delivered Intensity:	37 cd
Maximum Delivered Output:	34 lm
Operating Temperature:	-4°F to 114°F (-20°C to 50°C)
Standards:	UL & cUL Wet location listed
Warranty:	5 year WAC Lighting guaranteed warranty

BEAM ANGLES



Model	Beam	Lumens Ref Output*	CBCP	Efficacy (lm/W)
FCH01 1.4"	Flood 50°	34	37	11

*Lumens and CBCP are reference values for fixtures set to 3000K Color Temperature. Refer to Multiplier Table on the next page to determine other outputs.



Fuego Compact
1” RGBW
FCH01

Fixture Type:

Project:

Catalog#:

Location:

ORDERING INFORMATION

CONFIGURATION TABLE				
Model	Color Temperature & CRI	Control Options	Beam	Finish
FCH01	RGB830 - 3000K - 80 RGB840 - 4000K - 80 RGB857 - 5700K - 80	D: DMX512-A	F: Flood - 50°	SS: Black-painted Stainless Steel

FCH01-RGB8__D-N-SS

Example: FCH01-RGB840D-N-SS

Power Supplies	Power	Dimming Range
DMX512-A and 0-10V PS-OD24-U100R-DL	96W	10 - 100%

Lumens and CBCP Multiplier Table

Use the below table to determine lumens and CBCP values for the combinations of power, color temperature, and CRI values.

Color Temperature		
3000K	4000K	5700K
1.00	1.07	1.15